





Features & Picture:

- ◆ Vehicle IR Day/Night Exterior Side-view Camera
- ◆ 1/3" SONY Color SuperHAD II Low Lux CCD or IMX138 Sensor
- ◆ Resolution: 650TVL, 700TVL, 1200TVL
- ◆ Lens Optional: 2.5/2.8/3.6/6.0/8.0/12.0mm
- ◆ IP69K&IP67 Water-proof & Vandal-proof housing
- ◆ With rubber gasket base for vehicle water-proof protection
- ◆ Angle Adjustment from 0-22°
- ◆ A/B/C/D directions for different orientations
- ◆ Easy Installation Mechanical Design
- ◆ 12 leds, vision range 12m(Optional)
- ◆ Dimension: L88xW70xH61(mm)


Dimensions:



Housing#: CM6S

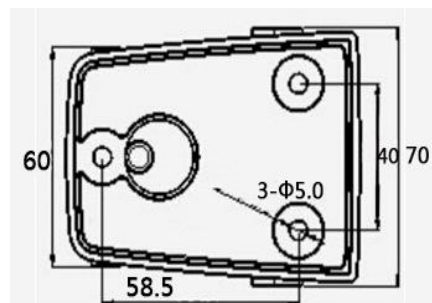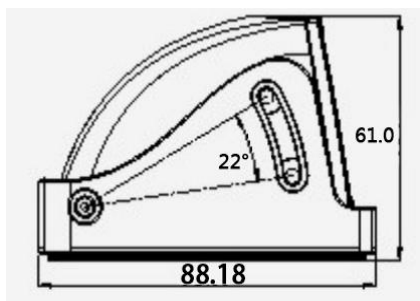

Common Camera Placement Identified

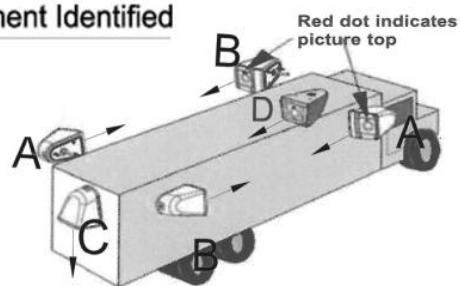

A Indicates left side/forward view and right side/rear view

B Indicates right side/forward view and left side/rear view

C Indicates Rear Observation

D Indicates bottom view

Specifications

Model	650SN-CM6S		701SN-CM6S	1200CM-CM6S
Specifications				
Pick up Device	1/3" SONY Color SuperHAD II Low Lux CCD		1/3" SONY IMX138 Sensor	
Signal Format	PAL or NTSC (color)			
Picture Elements	PAL:752(H)x582(V);	PAL:976(H)x582(V);		PAL:1280(H)x1024(V);
Horizontal Resolution	650TVL	700TVL		1200TVL(1.31 Mega pixels)
Sensitivity	0 Lux(Infrared LED On,at F1.2)			
Infrared LED	12 Leds			
Infrared LED Range	12m			
Scanning System	PAL:625 TVL; NTSC:525TVL 2:1 Interlace			
Synchronization	Internal sync.			
Infrared Spectrum	N/A		IR-Cut	
S/N Ratio	Over 50dB(AGC off)		Over 52dB(AGC off)	
Auto Gain Control	Auto			
White Balance	Auto			
Electronic Shutter	Auto			
Back Light Compensation	Auto			
Video Output	1 Vp-p,75ΩComposite ,BNCx1			
Audio Output	Optional			
Mirror	Optional			
Gamma Ratio	0.45			
Auto-iris Lens Control	N/A			
Lens	f2.5mm~12mm			
Lens Mount	M12xP0.5mm Thread			
Exterior Focus Adjustment	N/A			
Pan Adjusting	N/A			
Tilt Adjusting	0-22°			
Power Supply	12V DC ±10%, ø 2.0mm DC Jack x1			
Power Consumption	190mA			
Dimensions(L x W x H)	L88xW70xH61(mm)			
Net Weight	360g(including the pedestal)			
Weatherproof/Waterproof	Weatherproof (IP67)			
Operating Temperature	-10°C to +50°C			

*Specifications are subject to change without prior notice