


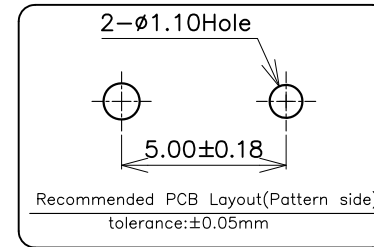
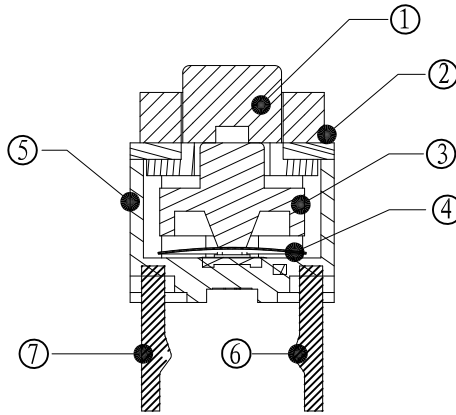



ABIDE BY ROHS

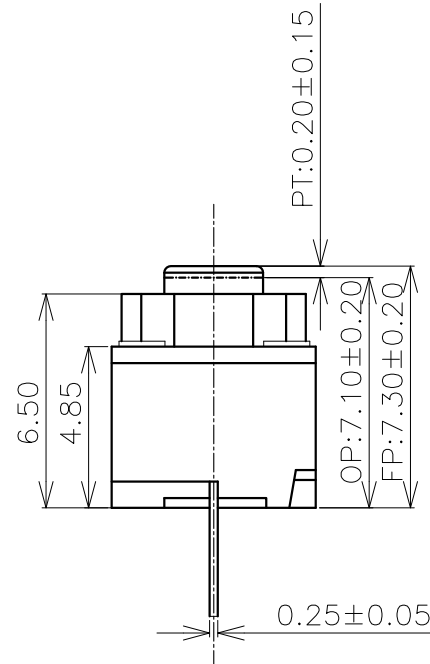

Specification :

1. Rating : DC12V 50mA
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min (DC250V)
4. Withstand Voltage : AC250V (50-60Hz) for 1 minute
5. Operation Force : 70 ± 20gf
6. Operation Position : 7.10 ± 0.2mm
7. CR = (OF - CF) / OF * 100: 20% - 40% (1/C)
8. Mechanical Life : 3,000,000 Cycles (min)

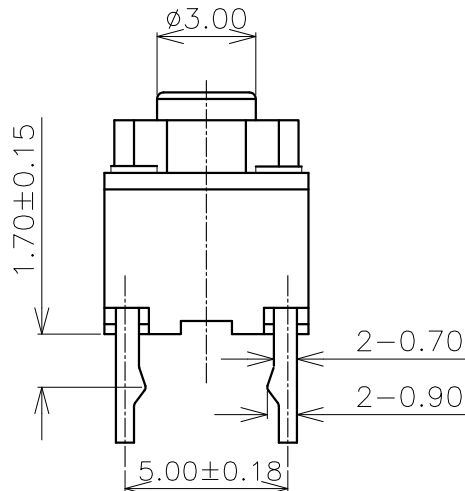

⑦	Terminal	2	1	BRASS(0.25t)	Plating Silver	
⑥	Terminal	1	1	BRASS(0.25t)	Plating Silver	
⑤	Base		1	Nylon	Gray	
④	Contact		1	Stainless Steel		
③	Rubber pad		1	Rubber	Gray	
②	Cover		1	Nylon	Black	
①	Keystoke		1	POM	Red	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	 东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO.,LTD	
DRAWN	Chen Geng	2017.6.13		
CHECKED			TITLE:	Micro Noise Switch (FP=7.3mm)
APPROVALS			PART NO.	CMI627301D07
TOLERANCES ARE		30 < L	± 0.30	ANGLE
		10 < L	± 0.20	
		5 < L	± 0.15	± 2°
		L ≤ 5	± 0.10	
		UNIT: mm	SCALE: 1:1	PROJ: 
		DRAWING NO.	KHA-MI6273-007EN	SHEET 1 OF 1

ECN-1706-06	C	2017. 6. 13	成品手感率CR: 20%-40%, 自动测试机手感率CR加严筛选22%-40% (1/C)	Chen Geng		
ECN-1505-01	B	2015. 5. 21	6. 0/7. 3 方形无声端子更改泡点形状, 提高防尘	LvPanliao		
	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.