
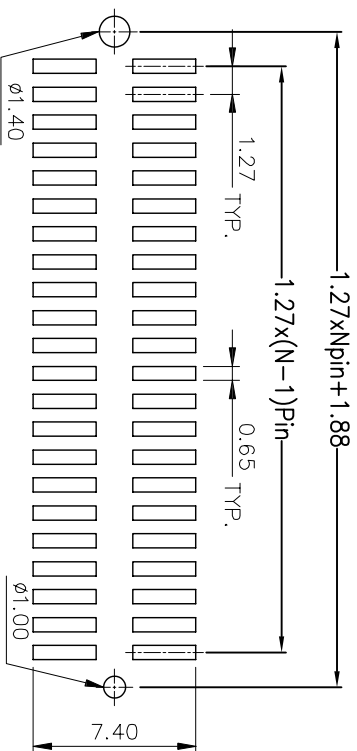
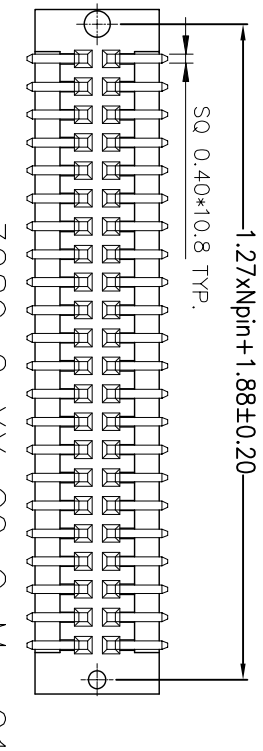
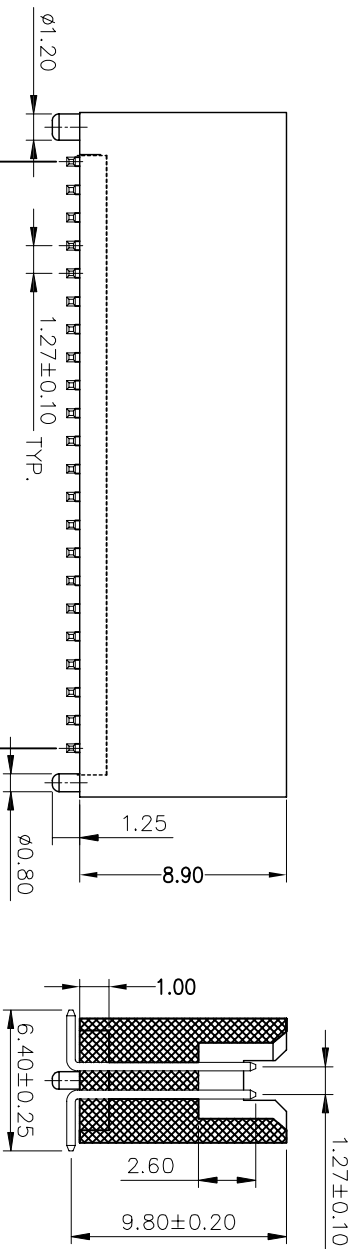


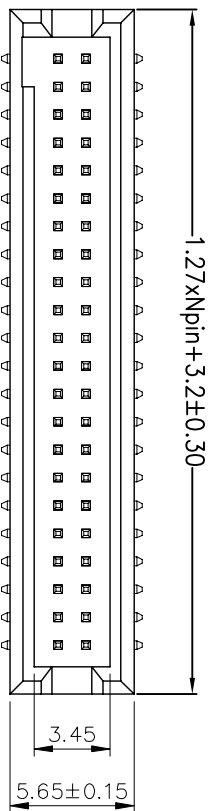

Recommended P.C. Board Layout

SPECIFICATIONS

Current Rating: 1 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Standard: 6T
 Contact Material: Brass
 Contact Plating: Au or Sn over 50u" Ni
 Max. Processing Temp: 230° C for 30-60 seconds
 (260° C for 5 seconds)

Plastic Height	No. of Rows	No. of Pins Per Row	Contact Plating	Insulator Material Option	Connector Type
57=5.7mm 71=7.1mm 89=8.9mm	2=Dual Row	8-100P	SN: Tin G0: Gold Flash G2: 5U" Gold G3: 10U" Gold G4: 15U" Gold G5: 30U" Gold S0: Gold Flash/Tin Standard: G0	A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F KB-LCP S Special	S= Straight R= Right Angle M= SMT

JINLING 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO., LTD
 Tel: 86-755-2997-5806 Fax: 86-755-2997-5992

UNLESS OTHERWISE SPECIFIED: TOLERANCE				DRAWN NAME:			
X	: ±0.3	X°	: ±5°	1.27 简牛加高型 H8.9 加排针塑胶 SMT L=10.8			
X.X	: ±0.2	X.X°	: ±1°	SIZE	A4	SCALE	N:1
X.XX	: ±0.1	X.XX°	: ±0.5°	REV	A	UNIT	mm
DRAWN: BEN				CHECKED:	APPROVED:		
DATE: 23/11/11				DATE:			