


PB07A

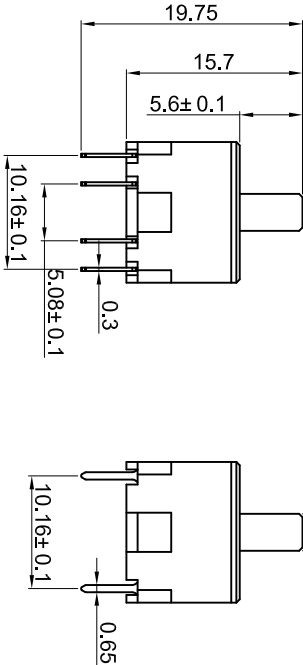

Rating: Min. 0.5uA

Max. 250mA/120V/9W AC/6W DC

Contact Resistance: 100mΩ Max

Insulation Resistance: 10MΩ Min

Dielectric Strength:AC 1000V for 2 minute

Total travel:1.8± 0.4mm

Operating Force:250± 50gf

Mechanical Life: Over 500,000 cycles

Electrical Life: Over 100,000 cycles



Operating Temperature:-40° C~160° C

MATERIAL:


Base: LCP;

Actuator: LCP;

Terminal:Phosphor bronze, Gold plated.



----- down
—— up



Temperature and duration of dipping:

Wave: Max 260° C for Max 10 seconds.

270° C for Max 5 seconds.

Soldering iron: Max 350° C for Max 3 seconds.

			公差 TOLERANCES	视角	比例尺 SCALE	日期 DATE	角度 ANGLE ± 5°	单位	DIMENSION UNIT	mm.	图号
A2	规格参数更新	2023. 05. 26	N/A	VIEWING ANGLE	NONE	2023. 05. 26		品名	TITLE		DRAWING NO
A1	重新整理发行	2014. 07. 21	N/A	核 准	CHECKED BY	绘图		品名	TITLE		DRAWING NO
A0	New Issue	2013. 08. 03	N/A	Richard	Sinc	Shaofei Ma		品名	TITLE		DRAWING NO
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	绘图		品名	TITLE		DRAWING NO