

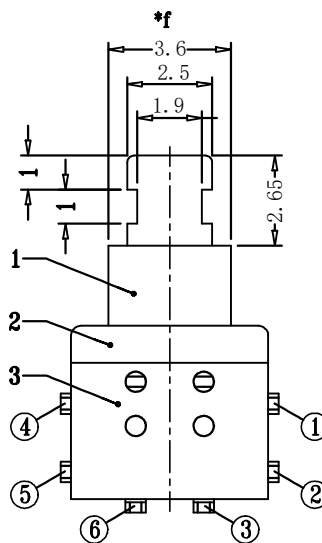



HAOYU

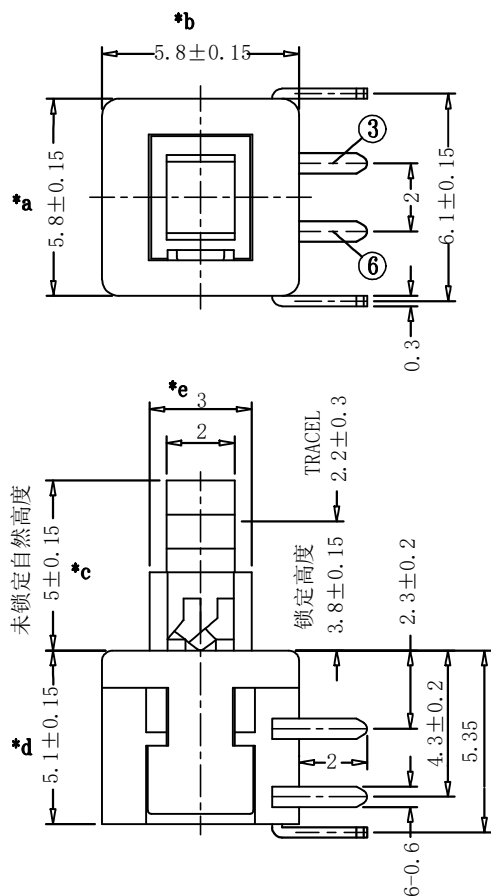

RELEASE




LOCK



SCHEMATIC (NON-SHORTING)

常态: 1与4导通, 2与3导通, 5与6导通
其余端子相互之间断开;
按下: 2.3.5.6 四个端子导通,
其余端子相互之间断开

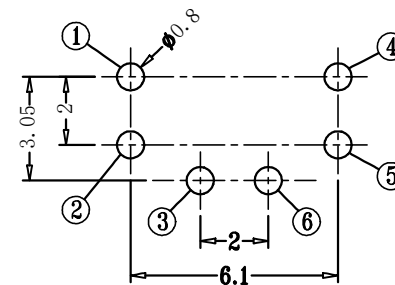

P.C.B layout (Pattern Side)

					TOLERANCE UNLESS SPECIFIED									
					UP TO 5mm: ±0.1 ABOVE 5mm: ±0.2	ANGULAR ±1°								
5	SPRING	SUS	1	NATURAL	NO	DATE	REVISIONS				BY	APPD		
4	CAM STICK	SUS	1	NATURAL	TITLE:PUSH BUTTON SWITCH			UNIT : MM	ROHS	DWN				
3	CASE	PPA/BRASS STRIP	1	BLACK/Ag PLATED	MODEL: PB-22E77-S-00(LT002)			SCALE: 4:1	COMPLIANT	CHK'D				
2	COVER	PPA	1	GREY	 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司			APPD		PRO.AGL:  		REV :A0		
1	KNOB	PPA/PHOSPHOR BRONZE	1	WHITE/Ag CLAD										
NO.	PART NAME	MATERIAL	QTY	FINISHING										