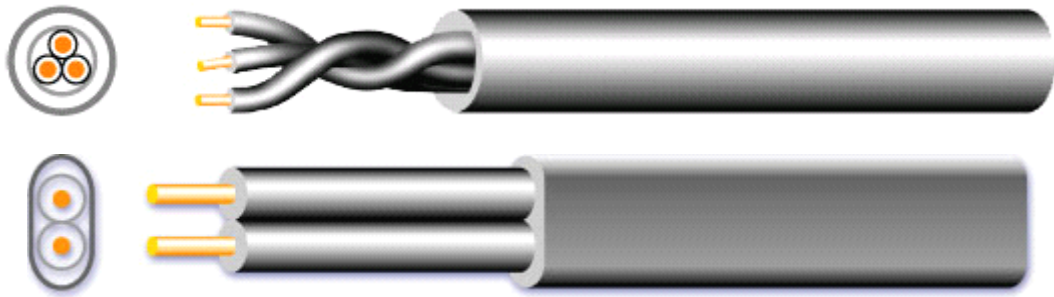


H05VVH₂-F/H05VV-F**PVC Flexible Power Cords 聚氯乙烯电源软线****产品说明:**

- 额定温度: 70℃
- 额定电压: 300/500V
- 参考标准: DIN VDE 0281-5
- 导体使用绞合 0.75~4.0mm² 裸铜
- PVC 绝缘, 符合 ROHS 环保标准
- PVC 护套, 符合 ROHS 环保标准
- 通过 HD 405.1 阻燃测试
- 使用标准绝缘厚度、易裁线、易剥皮
- 用于一般电子、电器电源连接线

PRODUCT DESCRIPTION

- Rated temperature: 70℃
- Rated voltage: 300/500V
- Reference standard: DIN VDE 0281-5
- Stranded bare copper conductor 0.75~4.0mm²
- PVC insulation, comply with ROHS environmental standard
- PVC jacket, comply with ROHS environmental standard
- Passes HD 405.1 flame test
- Uniform insulation thickness to ensure easy stripping and cutting
- For general purpose use for power supply cord

**印字 MARKING**◁VDE▷ H05VV-F () mm² 300/500V B&T(ZHANGZHOU) CABLE CO.,LTD◁VDE▷ H05VVH₂-F () mm² 300/500V B&T(ZHANGZHOU) CABLE CO.,LTD**产品结构 CABLE CONSTRUCTION**

导体 CONDUCTOR					绝缘 INSULATION		护套 JACKET		最大导体电阻 MAX.COND. RESISTANCE (Ω/km,20℃,DC)
型号 STYLE	面积 CROSS SECTION (mm ²)	构造 CONSTR- UCTION (No./mm)	外径 DIA. (mm)	芯数 (No.)	绝缘厚度 INSULATION THICKNESS (mm)	外径 O.D. (mm)	护套厚度 JACKET THICKNESS (mm)	外径 O.D. (mm)	
H05VVH ₂ -F	0.75	24/0.20	1.13	2	0.61	2.35	0.80	3.95×6.30	26.0
	1	32/0.20	1.31	2	0.60	2.50	0.80	4.10×6.60	19.5
H05VV-F	0.75	24/0.20	1.13	2	0.61	2.35	0.80	6.30	26.0
				3	0.60	2.35	0.82	6.70	
	1	32/0.20	1.31	2	0.60	2.50	0.80	6.60	19.5
				3	0.60	2.50	0.86	7.10	
	1.5	30/0.25	1.58	2	0.71	3.00	0.80	7.60	13.3
				3	0.71	3.00	0.92	8.30	