
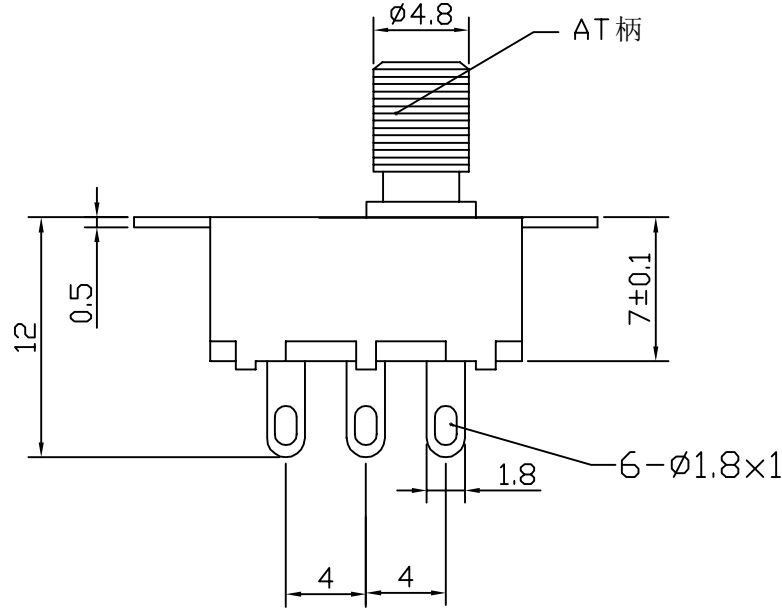
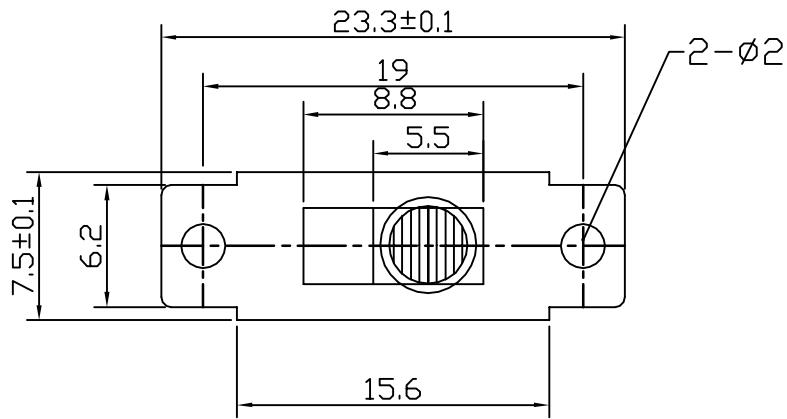



CIRCUIT

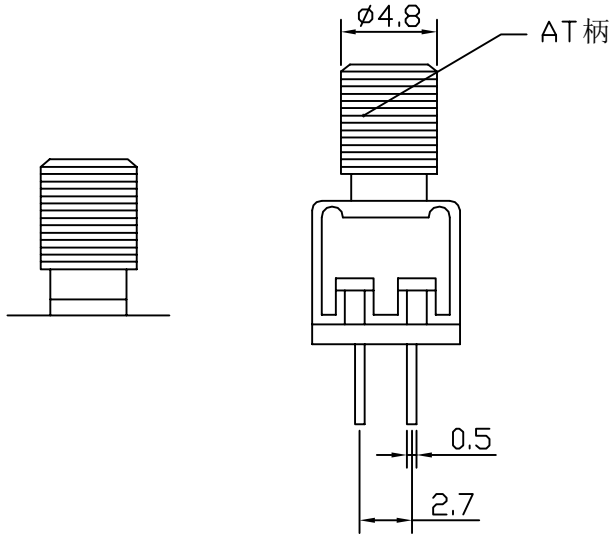

P.C.B. LAYOUT

KEY SPECIFICATION:

1. RATING : DC 50V 0.3A
2. FNCTION:2P2T
3. CONTACT RESISTANCE:100m0hm MAX
4. INSULATION RESISTANCE:100M0hm MIN
5. DIELECTRIC STRENGTH:AC 500V(50-60HZ)FOR 1Min
6. OPERATING FORCE:120gf±50gf
7. OPERATING LIFE:5,000CYCLES
8. OPERATING TEMPERATURE:-16°+60°

8							TOLERANCE		TOLERANCE		
7							<5	±0.2	>50	±0.5	
6	CONTACT	BRASS STRIP	2	AG PLATED		DATE	5~30	±0.3	角度	±3°	
5	SPRING	STEEL WIRE	2	NI PLATED NATURAL		ISSUE	30~50	±0.4			
4	TERMINAL	BRASS STRIP	6	AG PLATED	TITLE:SLIDE SWITCH			UNIT:mm		DRWG. NO. :	
3	BASE	PHENOL IC RESIN	1	NATURAL							
2	SHELL	STEEL STRIP	1	NI PLATED	MODEL NO:SS-22F32AT			SCALE:4:1		DWN	
1	KONB	BRASS	1	AG PLATED						CHK' D	
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD				APPD.		