
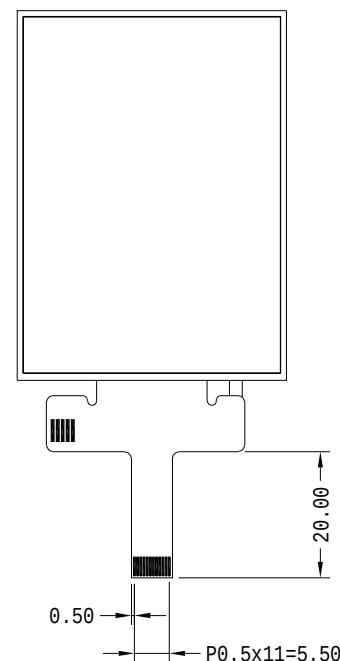
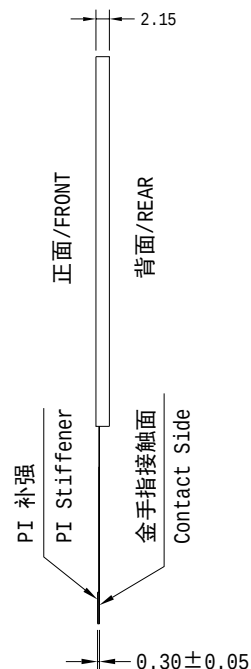


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

字体：黑体
bold (typeface)

[illegible]

观看方向/角度 Viewing Direction	U85/D85/R85/L85 (Typ.)	TFT 工作温度 TFT Operating Temp	-30 °C ~ +80 °C
接口 Interface	4-line 8bit serial I/F	TFT 储存温度 TFT Storage Temp	-30 °C ~ +80 °C
工作电压 Operating Voltage	VCI=3.0~3.3V	背光驱动条件 Backlight conditions	Vf= 3.0 ~ 3.4V/If= 80 mA
驱动芯片 Driver IC	ST7789<TFT>	液晶模组亮度 LCM Brightness	400 cd/m ² (Typ)/固定电流测试

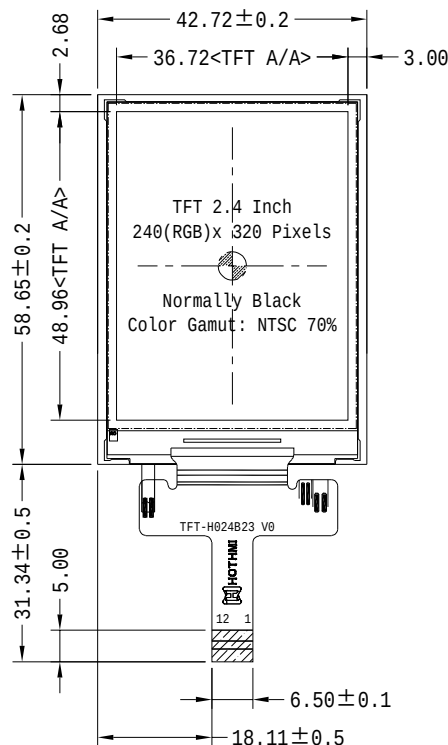

产品型号 Product model				TFT-H024B23QVIST4N12	
比例 Scale	1:1	设计制图 Design	LiU.YL		日期 Date
2024-10-12		版本 Ver	V0-0	单位 Unit	MM
公差 Tol		±0.3			