
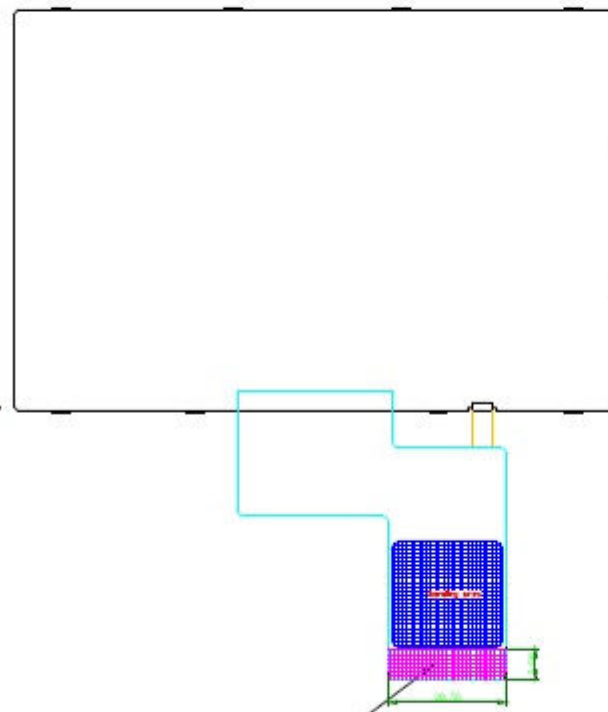


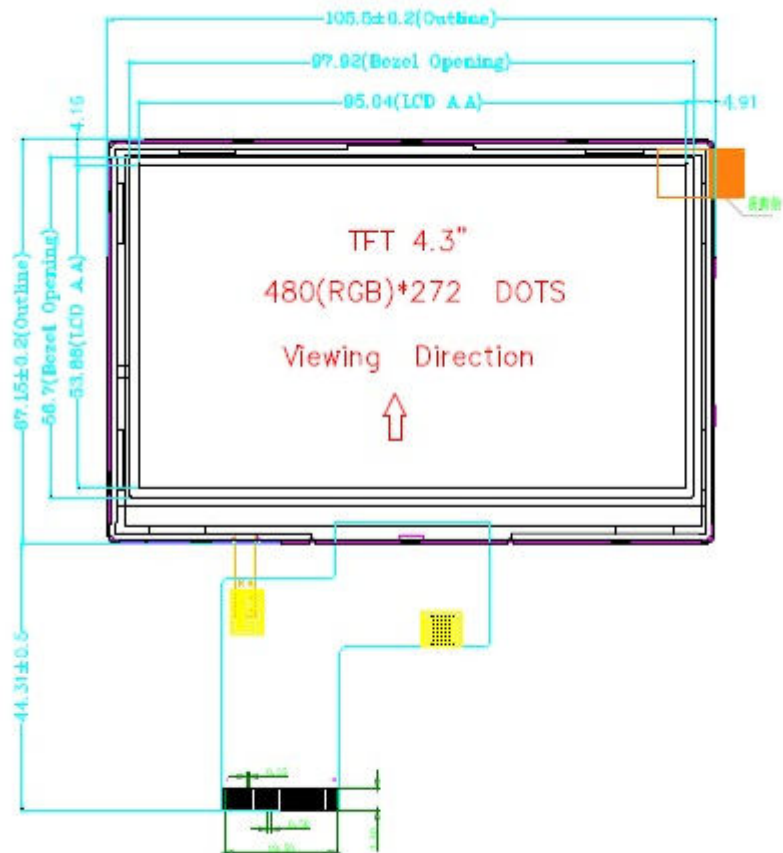

No	PIN NAME
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

背光电路图(CIRCUIT DIAGRAM):

A(+) ———— B(-)

NOTES:

- 1.DISPLAY TYPE: 16.7M COLOR TFT-LCD, TRANSMISSIVE
- 2.OPERATING TEMP: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- 3.STORAGE TEMP: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- 4.VDD=3.3V
- 5.LCD DRIVER: **ST7282**
- 6.BACKLIGHT: 7 CHIP-WHITE LED
- 7.符合ROHS要求

GENERAL TOLERANCE				SIZE	A4	DRAWING	MODEL	P043-40-V18	
STEP	1	2	3	UNIT	mm	DESIGN	TITLE	MODULE DRAWING	
$0 < X \leq 4$	± 0.05	± 0.10	± 0.20	SCALE	1 : 1	CHECKED	DWG NO.	P043-40-V18	
$4 < X \leq 16$	± 0.08	± 0.15	± 0.30	SHEET	1 OF 1	APPR.	DATE	2019.03.29	REV A2
$16 < X \leq 64$	± 0.12	± 0.25	± 0.50	3rd ANGLE PROJECTION					