



CAD FILE:



2P-ON-OFF

SCHEMATIC (NON-SHORTING)

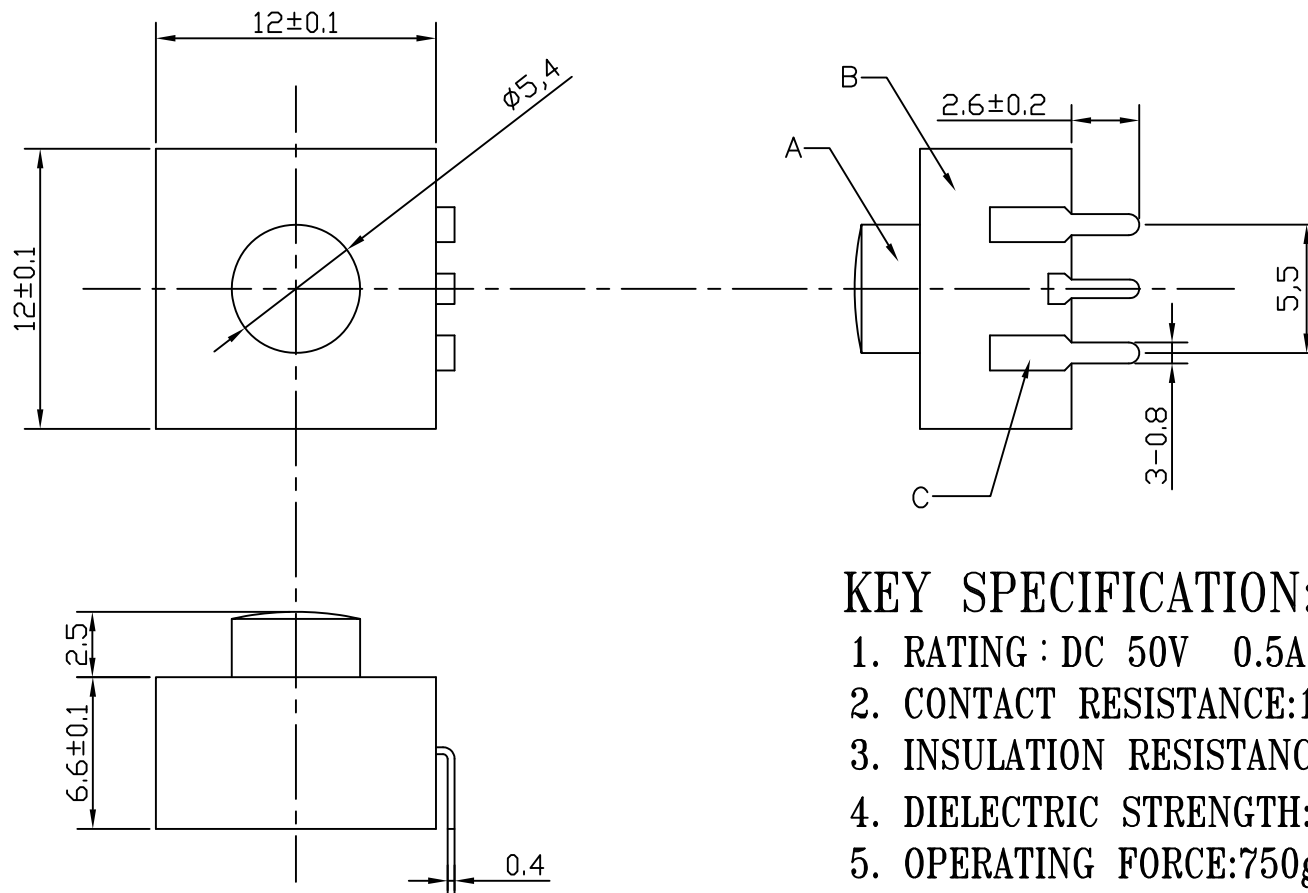

KEY SPECIFICATION:

1. RATING : DC 50V 0.5A
2. CONTACT RESISTANCE:100m Ω MAX
3. INSULATION RESISTANCE:100M Ω MIN
4. DIELECTRIC STRENGTH:500VAC (50HZ) FOR 1Min
5. OPERATING FORCE:750gf $\pm$ 50gf
6. OPERATING LIFE:10,000CYCLES
7. OPERATING TEMPERATURE:-20 $^{\circ}$ C $\sim$ +70 $^{\circ}$ C

8					TOLERANCE UNLESS SPECIFIED				
7	SPRING	SPCC	1	Ag PLATED					
6	CONTACT	BRASS	1	Ag PLATED	WITHIN 1.5: ± 0.1 mm				
5	TERMINAL	BRASS	3	Ag PLATED	OVER 1.5: ± 0.2 mm				
4	DOWN BUTTON	PA66	1	BLACK	ANGLES: $\pm 2^{\circ}$	ISSUE	DATE	DESCRIPTIONS	APPD.
3	UP BUTTON	PA66	1	BLACK	TITLE: PUSH BUTTON SWITCH		UNIT: mm		DRWG. NO.:
2	COVER	PA66	1	BLACK	MODEL NO.: JBL6-1311 H=9.1mm		SCALE: 4:1		DWN
1	BASE	PA66	1	BLACK	XIAMEN JINBEILI ELECTRONICS CO.,LTD				CHK'D
NO.	DESCRIPTION	MATERIAL	QTY	PLATING					APPD.