



Category

SWITCH

- ANTI-VANDAL SW
- ROCKER SW
- PUSH SW
- TOGGLE SW
- MICRO/DETECTOR SW
- SLIDE SW
- ROTARY SW
- DIP SW
- TACT SW
- LIGHTED TACT SW
- KEYLOCK SW
- CAPACITANCE SW
- PRESSURE SW
- SAFETY & CONTROL SW
- VEHICLE SW
- THERMOSTAT SW
- TRIGGER SW
- BATTERY SW
- CK series
- MR2 Series with Aesthetic IP68

SOCKET

WIRE HARNESS

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

POTENTIOMETER


CONNECTOR

WATERPROOF PARTS

NEW PRODUCT

Products Search

Search

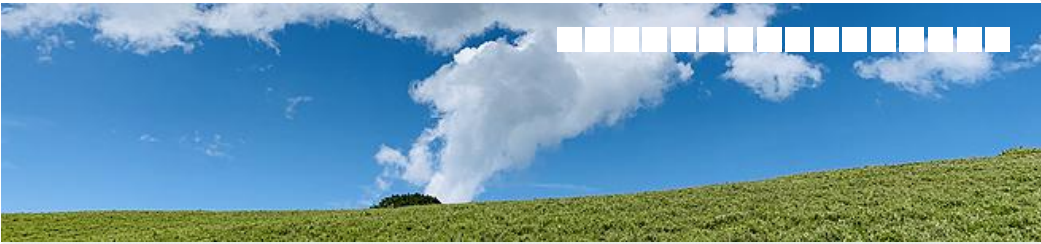

OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [LA139S Series](#) ▶ [LA139S Series](#)

SWITCH / SAFETY & CONTROL SW

LA139S Series
Panel Mounted Sealed Pushbutton,
Selector & Keylock Switches With or
Without Illuminated Type

Panel cutout Ø16mm
SPDT & DPDT circuit
Momentary & lock version
Sealed to IP65 or IP40
Various actuator sizes and styles

PDF Download

Get Information

Print this page



ZOOM IN

Feature

- Rating: 0.5A 250VAC, 1A 24VDC
- Emergency stop rating: 3A 125/250VAC
- Contact resistance: 50mΩ initial (Max.)
- Insulation resistance: 100MΩ (Min.)
- Electrical life: 50, 000 cycles
- Mechanical life: 1,000, 000 cycles
- Installed diameter Ø16 mm
- Illuminated & non-illuminated type
- Contact type: 1NO 1NC / 2NO 2NC
- Momentary or lock version
- Protection level: IP65 or IP40
- Applications: industrial control panel, machine and equipment, automotive, power distribution system

Specification



How to order

LA139S - 11 M T D -			
CONTACT TYPE	ACTUATOR TYPE	FUNCTION	ILLUMINATED
11 1NO + 1NC SPDT	LAMP / NO LAMP	☐ Momentary	☐ No Lamp
22 2NO + 2NC DPDT	A Round	☐ Maintained	☐ Lamp
	A3 Round (Borax)		
	AX Selector (Round)		
	F Square		
	CF Rectangular		
	M Mushroom		
	NO LAMP		
	AF Buzzer (No Function)		
	ZX Emergency Stop		
	FX Selector (Square)		
	CFX Selector (Rectangular)		
	AY Keylock (Round)		
	FY Keylock (Square)		
	CFY Keylock (Rectangular)		

R

☐


12V

LENS COLOR	ANGLE & POSITION	VOLTAGE
☐ No Lamp	☐ For Pushbutton Actuator	☐ No Lamp
R Red	For Selector or Keylock Actuator	6.3V
G Green		12V
Y Yellow	2 2 Ways 90°	24V
B Blue	3 3 Ways 45°	48V
W White		110V
		220V

Item




LA139S-11A3DR

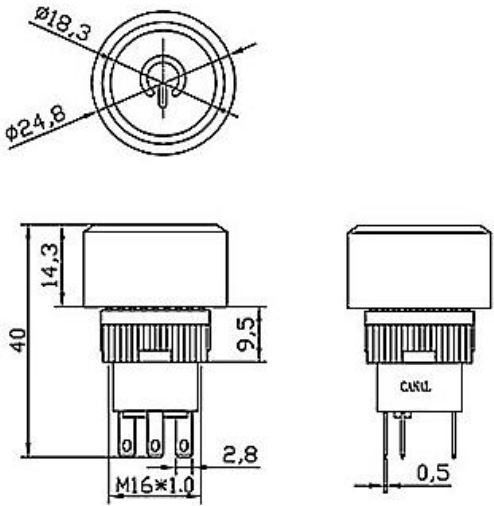





LA139S-11ADR

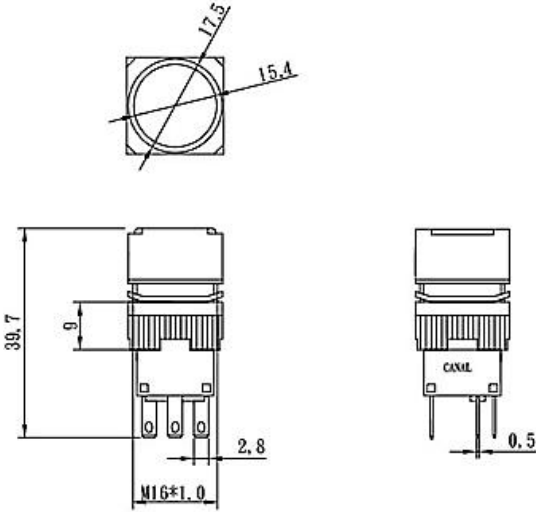

LA139S-11AXDY2

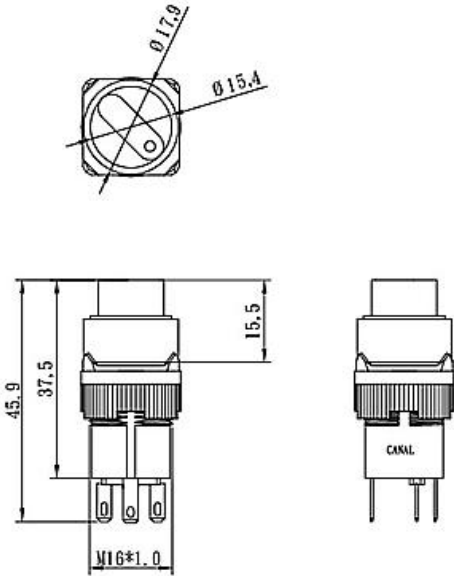


LA139S-11AX2

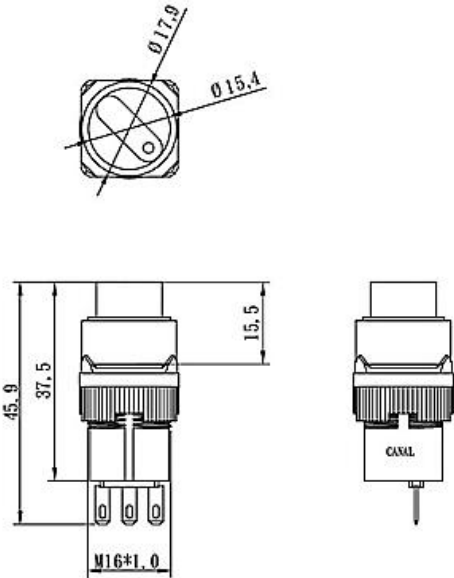





LA139S-11CFX2

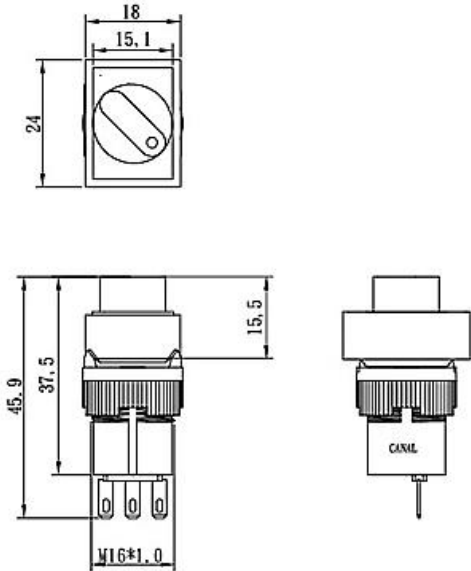

LA139S-11ADB

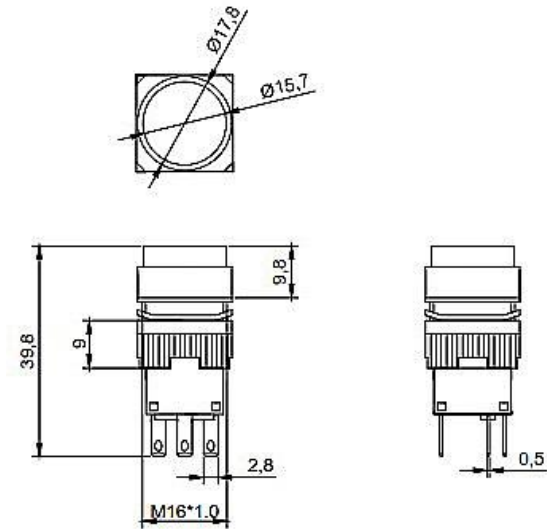


LA139S-11CFDY

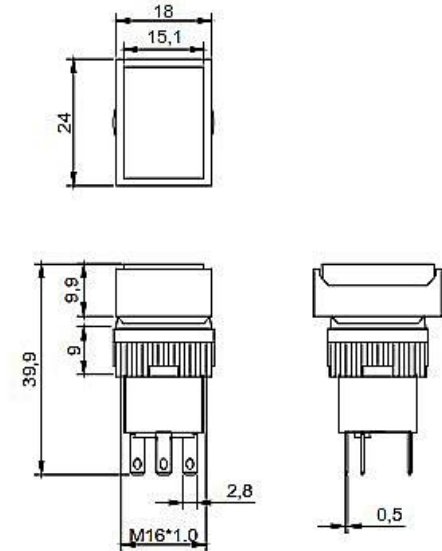





LA139S-22FDG

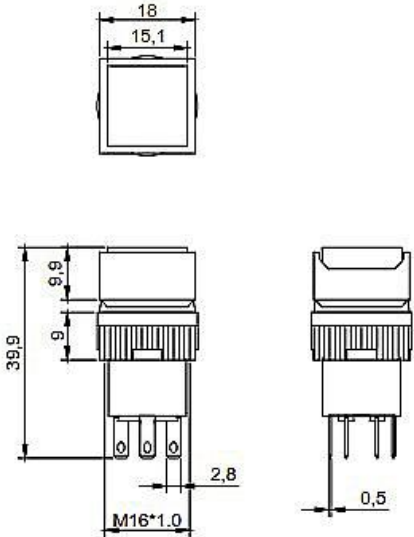

LA139S-11MDR

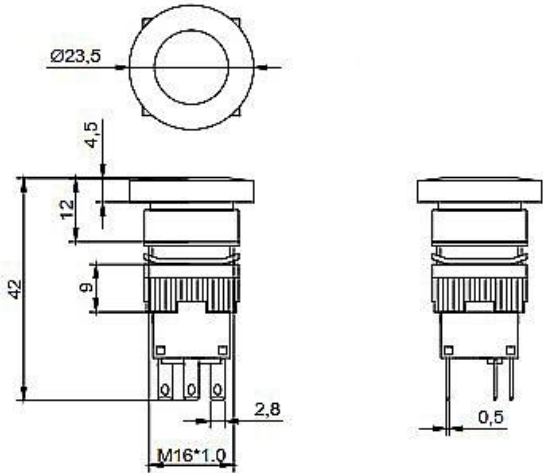


LA139S-11ZX

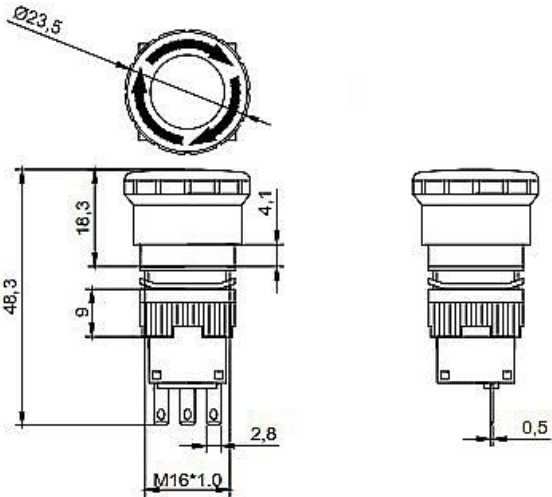





LA139S-11FY2

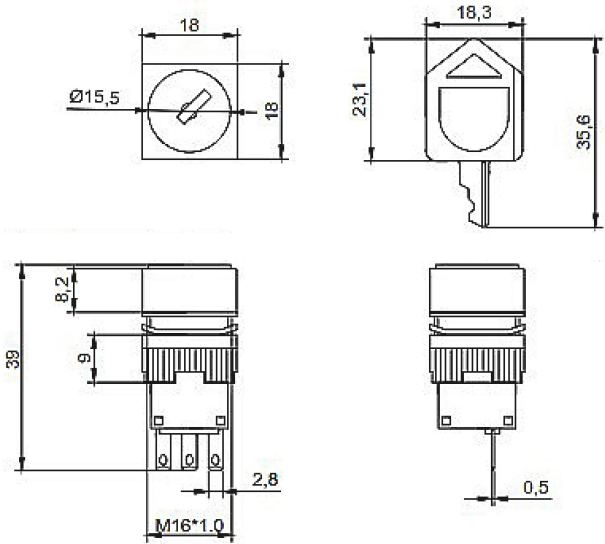

LA139S-22AX2

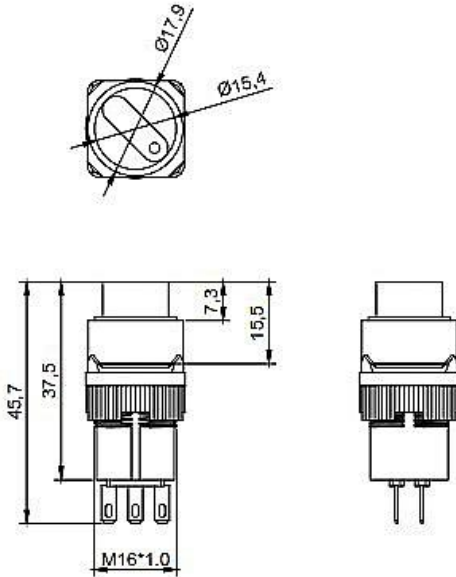

LA139S-AF

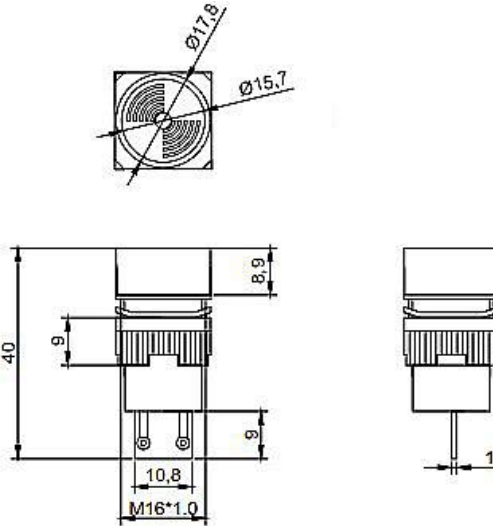

BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved

