


io.e[®] SMART Wi-Fi LED PANEL LIGHT

All sides are lined with LED's to grant optimal illumination.
High light output at a reduced energy consumption of up to 50%.
Over 20,000 hours life expectancy. Wide angle of deflection with even light distribution.
No start-up delay, no flickering, no bumming.
High efficiency (95%) constant current driver with built-in overheat protection that remains stable at a wide range of input voltages.
Independent LED circuit design prevents complet blackout in case an LED fails.
Causes no electromagnetic interference.
Operating Temperature: -20 C to +40 C

Humidity Operating: 10-80%
Product weight: 6.1 Kg
Size: 595*595 / 620*620



Model No.	Voltage	Power	UGR	CCT	CRI	Lumen	Dimmable
LK-WIFI-D	100-240 V	40W	< 19	4000K	80	4000 lm	Bright
LK-WIFI-DW	100-240 V	40W	< 19	2700-6500K	80	4000 lm	CCT & Bright



What io.e[®] Wi-Fi LED Panel can do



Remote Control
Turn on/off electrical appliances anywhere



Color Temperature
Select color temperature from invigorating white to cozy warm white.




Set a Timer or Schedule
Set a timer or schedule to control automatically



Group Devices
Group multiple devices for easy control



Works with Amazon Echo
Try voice control all your devices of io.e

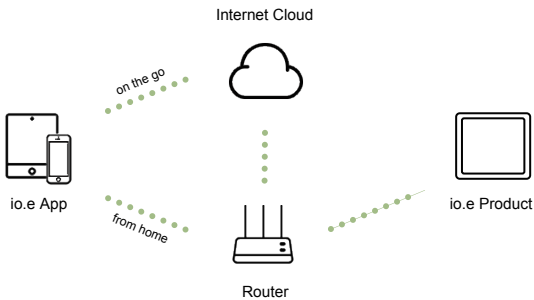

Scan to download io.e App

