


Mini Keyboard Controller



CKB-02V2



Features

- 4D joystick for pan/tilt/zoom/focus control, ergonomic design and excellent finishing;
- High brightness OLED display;
- Auto backlight keys;
- Shortcut keys customization;
- Batch program cameras in the systems;
- Multi-level protection from illegal operation or setting;
- Multi-baud rate and protocols;
- 256 address;
- Compact design with portable features.

Controller

Control Interface

RS-485, RS-232

Protocol

Pelco-D, Pelco-P, VISCA

Baud Rate

2400bps, 4800bps, 9600bps,
19200bps, 38400bps

Address

0~255

Joystick

4-axis

Display

OLED

Power

DC12V

Power Consumption

<2W

Working Temperature

0°C ~ +40°C

Storage Temperature

-20°C ~ +50°C

Relative Humidity

≤90% (non-condensation)


Dimensions (L×W×H)

200mm×120mm×103mm

Net Weight

0.5kg

Typical Case

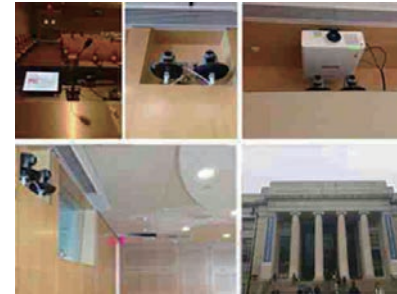

Lecturer Tracking Cameras Installed at MIT, U.S.A



Lecturer Tracking Cameras Installed at Brandeis University, U.S.A



Lecturer Tracking Cameras Installed at UNESCO RCEP, UAE



Lecturer Tracking Cameras Installed at Wageningen University, Netherlands



Lecturer Tracking Cameras Installed at KuanDong University, South Korea



HD PTZ Cameras Installed at Israel Parliament