




UNIK-LINK PUSH-IN WIRE CONNECTORS

For use with solid and stranded conductors

Specification

- **Housing:** Polyamide 66 (PA 66), grey and white flame-retardant to UL 94V-2
Working temperature: T100°C (IEC), 105°C/221°F (UL)
Polybutylene Terephthalate (PBT), black flame-retardant to UL 94-V0
Working temperature: 140°C/284°F (IEC/UL)
- **Clamp Unit:** Brass, tin-plated
Stainless spring steel
- **Strip Length:** 9.0 - 11.0 mm / 0.35 - 0.43 in.
- Can be supplied under private label packaging.

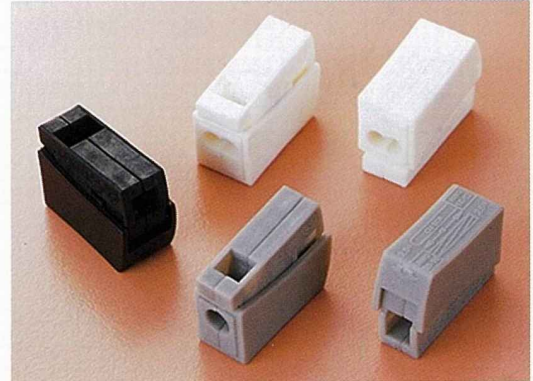

Ratings

Model	Poles	Color	Elec. Rating & Wire Range	Packing	Cat. No.
PC301	1	Grey	● 24 A, 450 V, T100°C ● Installation side: 0.75-2.5 mm², Sol 18-16 AWG, Sol ● Lighting side: 0.5-2.5 mm², Sol/Str 18-16 AWG, Sol/Str Cu	Box of 100	PC30200
				Ctn of 5,000 (10 bags, 500 ea)	PC30201
				Bag of 10 (with header)	PC30202
PC301B	1	Black	● 24 A, 450 V, T140°C ● Installation side: 0.75-2.5 mm², Sol 18-16 AWG, Sol ● Lighting side: 0.5-2.5 mm², Sol/Str 18-16 AWG, Sol/Str Cu	Box of 100	PC301B0
				Ctn of 5,000 (10 bags, 500 ea)	PC301B1
				Bag of 10 (with header)	PC301B2
PC302	2	White	● 24 A, 450 V, T100°C ● Installation side: 0.75-2.5 mm², Sol ● Lighting side: 0.5-2.5 mm², Sol/Str	Box of 100	PC30200
				Ctn of 5,000 (10 bags, 500 ea)	PC30201
				Bag of 10 (with header)	PC30202
PC302B	2	Black	● 24 A, 450 V, T140°C ● Installation side: 0.75-2.5 mm², Sol ● Lighting side: 0.5-2.5 mm², Sol / Str	Box of 100	PC302B0
				Ctn of 5,000 (10 bags, 500 ea)	PC302B1
				Bag of 10 (with header)	PC302B2

