




KCD3-20

额定电流、电压
 16A 125/250VAC
 16(8)A 250VAC T125/55
 接触电阻: $\leq 50\text{m}\Omega$
 绝缘电阻: $\geq 100\text{M}\Omega$
 介电强度: $\geq 1500\text{VAC}/5\text{S}$
 电气寿命: ≥ 10000 次

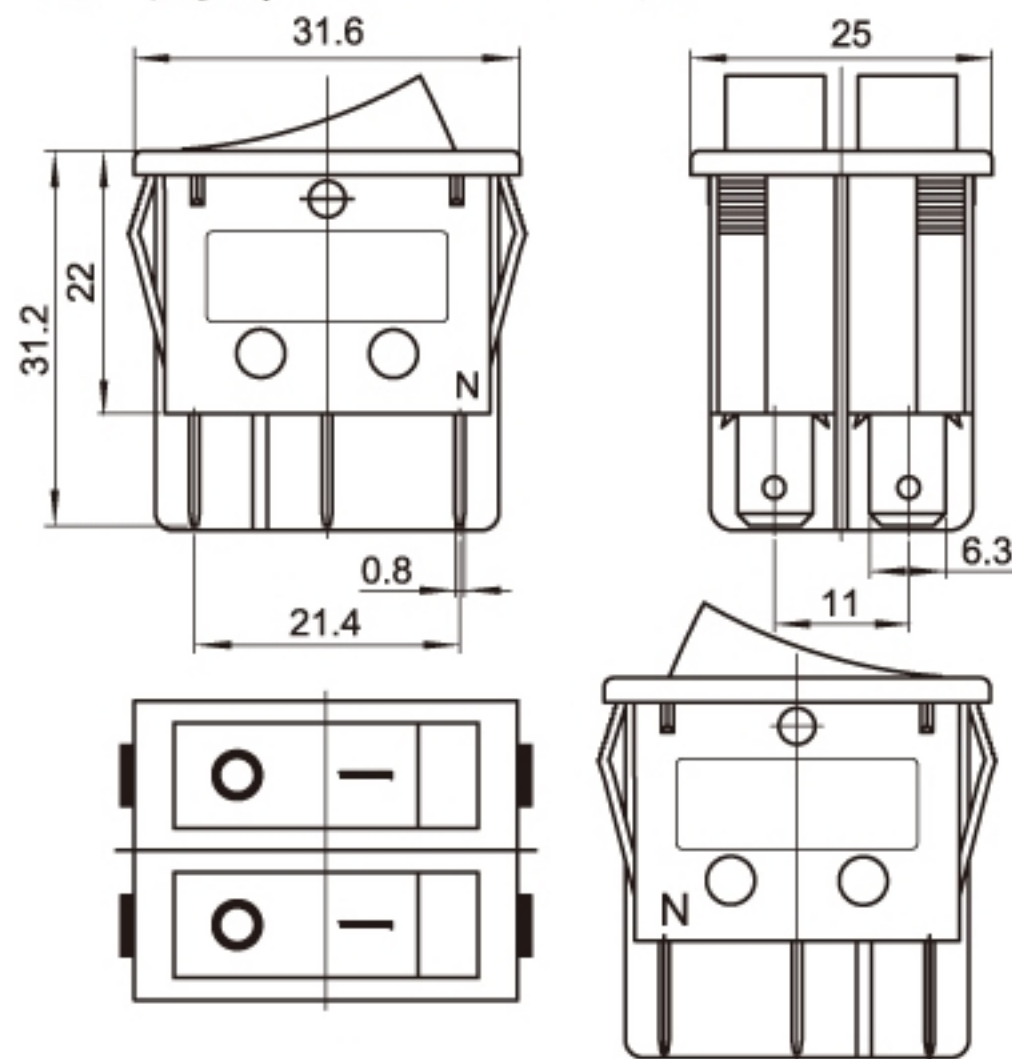

Rating:
 16A 125/250VAC
 16(8)A 250VAC T125/55
 Contact resistance: $\leq 50\text{m}\Omega$
 Insulation resistance: $\geq 100\text{M}\Omega$
 Dielectric intensity: $\geq 1500\text{VAC}/5\text{S}$
 Life: ≥ 10000 Cycles

序列号

电路图

端子规格

KCD3-201-2/N

