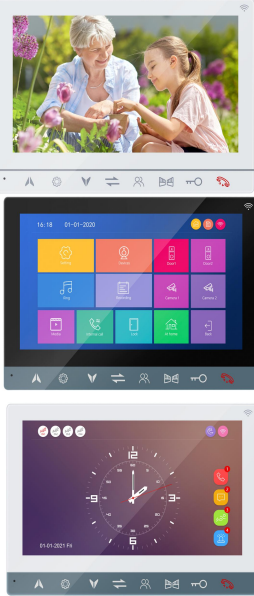


Parameter

	Model	95710
	Material	ABS Plastic case
	Monitor	7 Inch TFT Sensor Button
	Display resolution	1024×600 (AHD1080/AHD960P/AHD720P/CVBS Switchable)
	Calling Mode	Two-way Intercom
	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression and Echo Cancellation
	Noise Suppression and Echo Cancellation	1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding
	Work Temperature	-49 °F ~ 140 °F(-45 °C ~ 60 °C)
	Standby Current	Maximum 300MA
	Work Current	Maximum 800MA
	Power Supply	External switching power Supply DC12V-15V-Optional ; Built in power Supply-Optional
	Built in power	AC100-240V
	System	6 indoor monitors+2 call panels+2 CCTV cameras
	Memory	Yes,Max 128 GB SD card
	Installation Way	Surface Mounting
	Model	94221-C-1080P
	Material	Aluminum Alloy Case + Acrylic
	Camera Sensor	1/2.7"COMS,2.3mm Lens,2.0MP
	View angle	160°
	Night vision	Yes
	Motion detection	Yes
	Light supplement mode	IR Cut, 5 PCS Infrared LED
	Waterproof	IP65
	Operation Temp	- 40℃ ~ +50℃
	Standard	PAL/NTSC
	Power Consumption	200mA Max
	Connection	4 wire connection
	Installation Way	Surface Mounting or Embedded installaton