



REV	DC/EC NUMBER	DESCRIPTION	DATE
1			

I/F:4-WIRE SPI

TOP VIEW

SIDE VIEW

BOTTOM VIEW

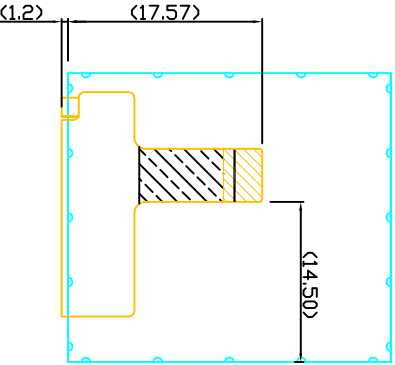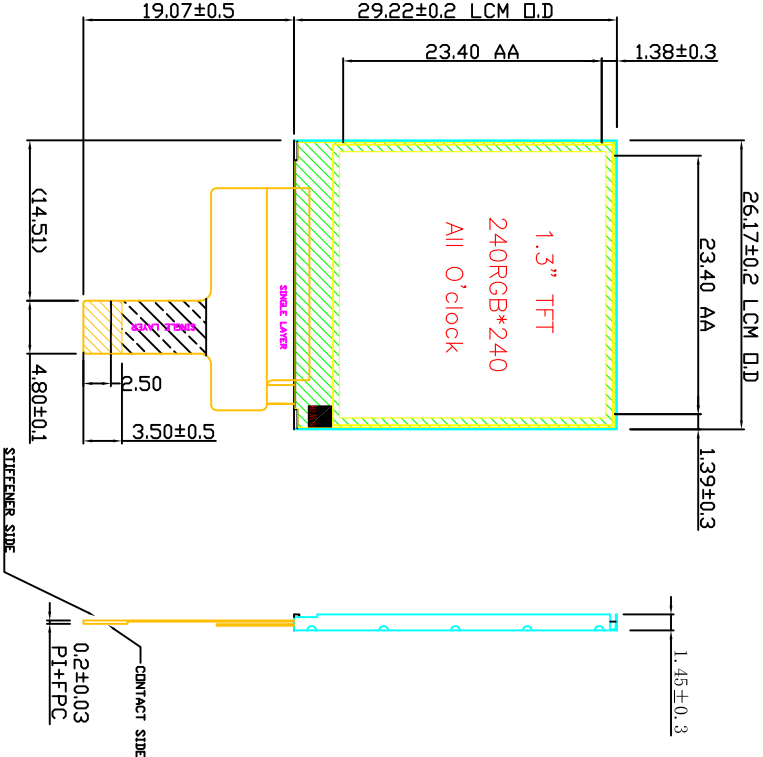


PIN	SYMBOL
1	LED-K
2	LED-K
3	LED-A
4	LED-A
5	NC
6	VDD
7	10VCC
8	RESET
9	CS
10	SCL
11	D/CX
12	SDA
13	TE
14	GND
15	GND

FPC bending diagram

FPC is shipped without bending

LED CIRCUIT:

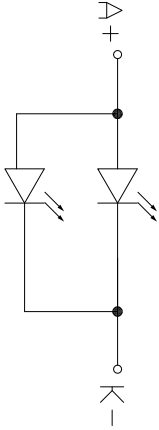

- NOTE:
- 1.LCD TYPE:TFT,IPS,NORMALLY BLACK
 - 2.VIEWING DIRECTION:FULL VIEW
 - 2.LCD ControllerIC: ST7789
 - 3.Top: -20°C~70°C
 - 4.Tst: -20°C~70°C
 - 5.Backlight: 2 Chip-White LED ,ILED=40mA at VF=2.8~3.4V
 - 6.RDHS Complain
 - 7.Unmark Tolerance:±0.2mm

CONTROL DIMENTION		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION	()	MODEL NAME	3rd ANGLE
APPROVED	JOBS	XF013QV02A-1SNL V00	UNIT mm
CHECKED	ERIC	DRAWING NUMBER	SCALE 1:1
DESIGNED	ISSCA	DESIGN NUMBER	PAGE 1/1