


Terminal Blocks, GWT 750°C

- Glass fiber reinforced polyamide 66, UL 94V-0 flame-retardant shell pass Glow Wire Test at 750°C per IEC 60335-1 – Afterflame time does not exceed 2 seconds.
- Working temperature rated to T140°C (IEC).
- Metal parts feature steel screws and nickel-plated brass contacts provided with or without wire protectors..
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- Integrated spring steel wire protectors prevent twisting and breakage of stranded conductors.
- Modular 12-circuit design can be cut into desired number of poles.
- Certified to IEC/EN 60998.

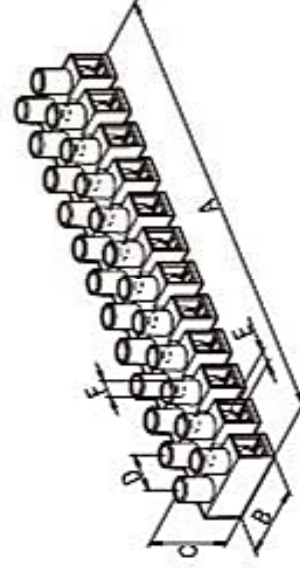

Cat. No.	Dimensions (mm/inches)						Screw
	Unit	A	B	C	D	∅E	
PA8H-750C	mm	96,20	17,00	14,30	8,20	2,80	2,90
PA8HDS-750C	In.	3,787	0,669	0,563	0,323	0,110	0,114
PA10H-750C	mm	117,2	20,00	16,40	10,00	3,40	3,60
PA10HDS-750C	In.	4,614	0,787	0,646	0,394	0,134	0,142
PA12H-750C	mm	140,7	23,80	19,00	12,00	4,20	3,90
PA12HDS-750C	In.	5,539	0,937	0,748	0,472	0,165	0,154
PA14H-750C	mm	158,0	25,60	25,00	13,50	5,00	4,40
PA14HDS-750C	In.	6,220	1,008	0,984	0,532	0,197	0,173

Cat. No.	Wire Protectors	Color	No. of Poles	Electrical Ratings & Wire Range	Approvals	Packing
PA8H-750C PA8HDS-750C	Without With	Beige	12	17,5A, 450V, T140°C 0,75-1,5 mm², Rigid/Flexible	CE 	Bag of 50 Carton of 500
PA10H-750C PA10HDS-750C	Without With	Beige	12	24A, 450V, T140°C 1-2,5 mm², Rigid/Flexible	CE 	Bag of 50 Carton of 500
PA12H-750C PA12HDS-750C	Without With	Beige	12	41A, 500V, T140°C 2,5-6 mm², Rigid/Flexible	CE 	Bag of 40 Carton of 400
PA14H-750C PA14HDS-750C	Without With	Beige	12	57A, 500V, T140°C 4-10 mm², Rigid/Flexible	CE 	Bag of 25 Carton of 250