
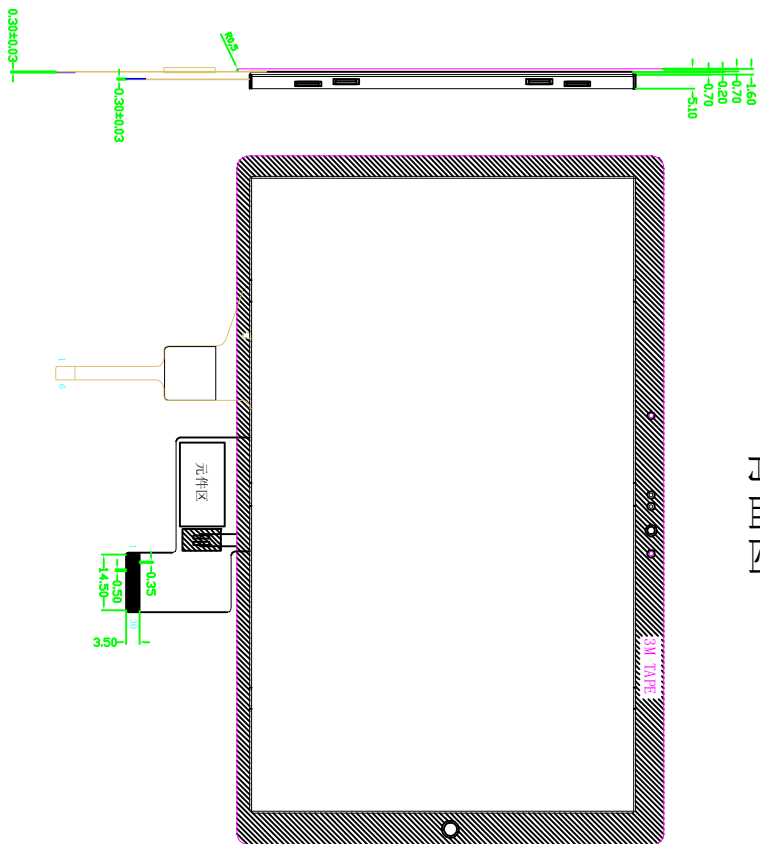


背面图

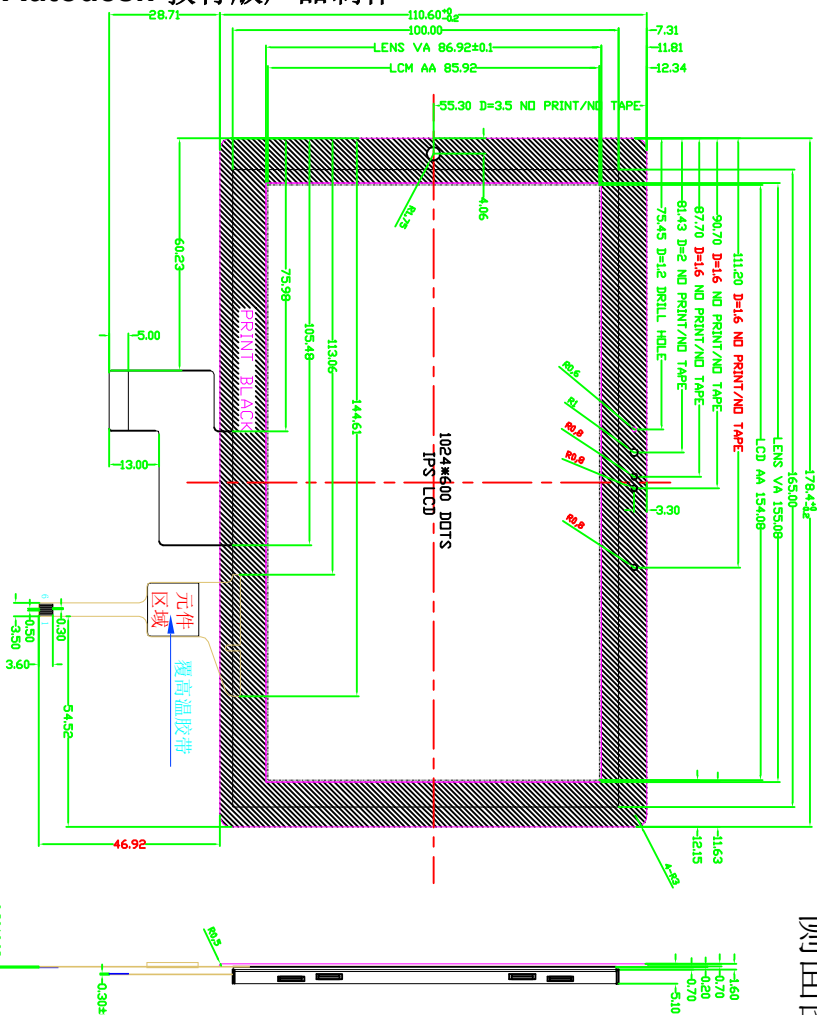


1	INT
2	SDA
3	SCL
4	RESET
5	GND
6	VDD

Pin	Pin Name
1	VLED+
2	VLED+
3	VGH
4	VGL
5	UPDN
6	SLR
7	LED-
8	LED-
9	AVDD
10	GND
11	MPI_DP3
12	MPI_DN3
13	GND
14	MPI_DP2
15	MPI_DN2
16	GND
17	MPI_CP
18	MPI_CN
19	GND

NOTE: THE MINIMUM BENDING RADIUS OF LCD/FPC IS 2.5MM,
THE MINIMUM BENDING RADIUS OF CTP/FPC IS 4.3MM

Specificogion:

- 1). Display mode :16.7M, TFT/Transmissive
- 2). Operating temp.: -20°C-70°C
Storage temp.: -30°C-80°C
- 3). Backlight: 27 chip White LED, 9 Parallel
- 4). CTP cover glass+ITO glass+PPC, IC: FT5426
- 5). CTP Transmittance : $\geq 86\%$
- 6). Dimensions with mark “#” are important, with mark “)” are referenced
- 7). All the raw materials are RoHS compliant

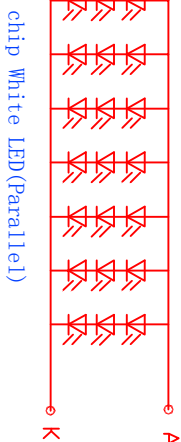

25	GND
26	STBYB
27	LRSTB
28	VDD
29	VDD
30	VCOM

						深圳市顺世科技有限公司 SHENZHEN SUNNY TECHNOLOGY CO., LTD	
DRAWN BY:		2019.03.12	ST070K-LCM(CTP-B)-V1.1			ST070K	
CHECK BY:							
APPROVER:			UNIT: mm	TOLERANCE: ±0.2	PAGE: 1 of 1	 	