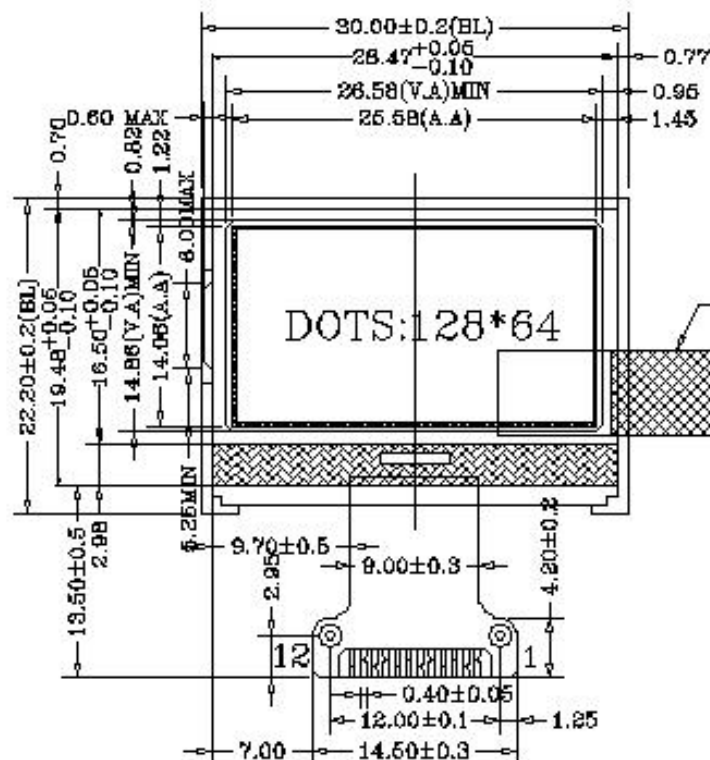


APPROVED BY:

Ver	Date	Modify Contents
V02	2019-3-8	更改背光定位柱位置
V03	2019-6-5	背光背面增加双面胶


红色尺寸请重点确认!!!

PULL
TAPE

VIEW DIRECTION

BLACK
SILICONCONTACT
SIDECONTACT
SIDE

PIN	DESC
1	CSB
2	RSTB
3	A0
4	SCL
5	SDA
6	VDD
7	VSS
8	Vo
9	XVo
10	Vg
11	NC
12	NC

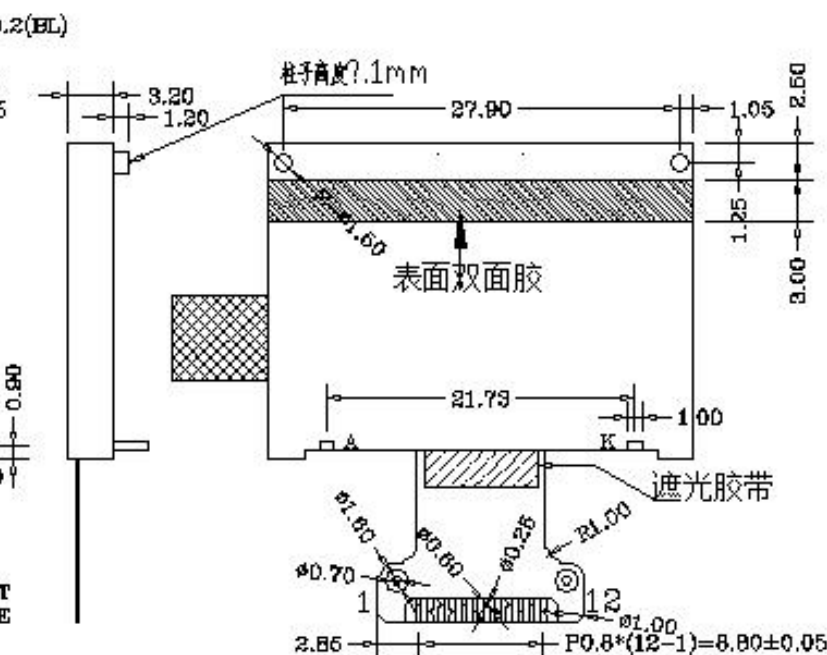

柱子高度?1mm


表面双面胶

遮光胶带


NOTE:

1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$
2. THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	FSTN	BACKLIGHT COLOR	WHITE
POLARIZER TYPE	TRANSMISSIVE	FRAME TYPE	----
DISPLAY TYPE	POSITIVE	DATA TRANSFER	4SPI
LCD COLOR	---	CONNECTOR TYPE	FPC
VIEWING ANGLE	6:00	TECHNOLOGY	COG
OPERATING TEMP	-10°C ~ +60°C	DC-DC IC	Within
STORAGE TEMP	-20°C ~ +70°C	LCD DUTY	1/64
BACKLIGHT TYPE	---	LCD BIAS	1/9
CONTROLLER IC	SC5280		ROHS
REMARKS	VDD=3.0V(typ), V _{com} =8.7V(typ); VLED=3.1V@IF=15mA		



4 color:WHITE(白色)



ANHUI GOLDEN VISION LCD SCIENCE & TECHNOLOGY CO., LTD.

安徽金视界光电科技有限公司

PRODUCT NO.	GVH12864GFFL101-21177A LCM				
DRAWN BY	CQ 2019.6.5	SCALE	1:1	REV.	V03
CHECKED BY		PAGE	1th		
APPROVED BY	FRANK 2019.6.5	UNIT	mm		

发至: ■开发 ■COG质量 ■COB质量 ■测架 ■FAE ■LCD贴片