



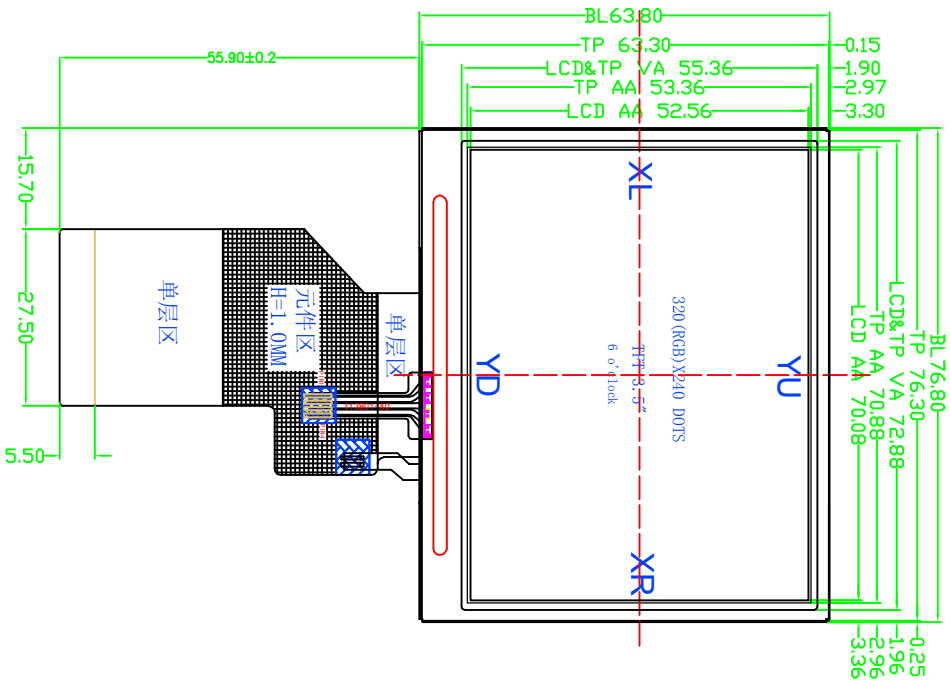

A ——— K6
IF 电流=20MA, 电压=19.2V
背光电路图 (CIRCUIT DIAGRAM)

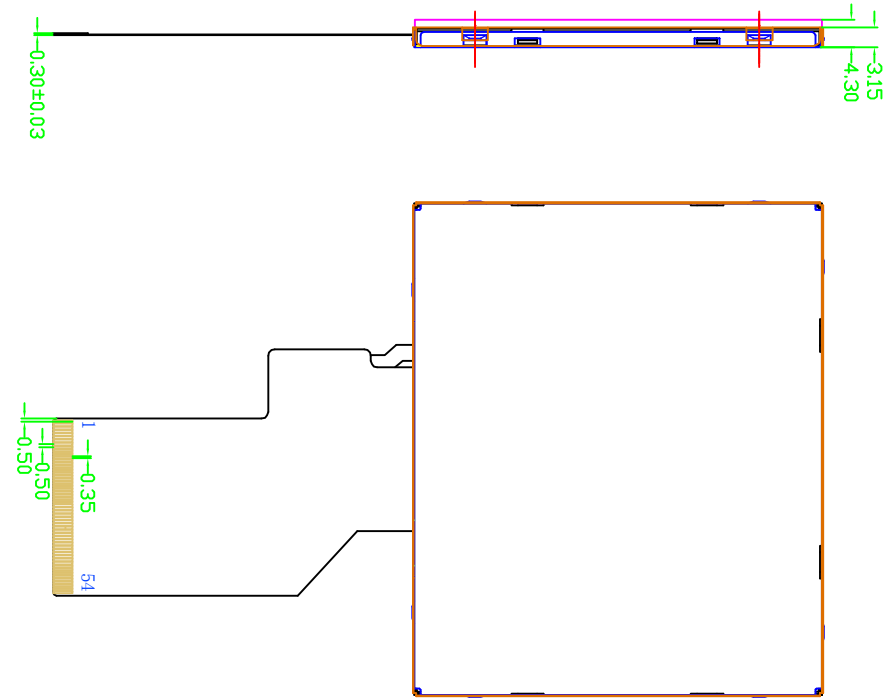

1	LED-	28	R0
2	LED-	29	R1
3	LED+	30	R2
4	LED+	31	R3
5	YU	32	R4
6	XR	33	R5
7	NC	34	R6
8	RESET	35	R7
9	/CS	36	H SYNC
10	CLK	37	V SYNC
11	SDI	38	DOTCLK
12	B0	39	NC
13	B1	40	NC
14	B2	41	VDD
15	B3	42	VDD
16	B4	43	YD
17	B5	44	XL
18	B6	45	NC
19	B7	46	NC
20	G0	47	NC
21	G1	48	NC
22	G2	49	NC
23	G3	50	NC
24	G4	51	NC
25	G5	52	ENB
26	G6	53	GND
27	G7	54	GND

- Specification:
- 1). Luminance: 250cd/m2(TYP)
 - 2). Display mode: a_Si TFT/Transmissive/Normal White
 - 3). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
 - 4). IC:
 - 5). All the raw material are Rohs compicant
 - 6). General tolerance: ±0.2

SUNNY				深圳市顺世科技有限公司 SHENZHEN SUNNY TECHNOLOGY CO., LTD			
DRAWN BY:	JACK	2015.09.29	ST035C-LCM-V1.0		SCALE:	1:1	MATERIAL:
CHECK BY:			UNIT:		TOLERANCE:	±0.2	PAGE:
APPROVER:			mm				1 of 1