



Category

SWITCH

- MICRO/DETECTOR SW
- ROCKER SW
- PUSH SW
- TOGGLE SW
- ANTI-VANDAL SW
- CAPACITANCE SW
- SLIDE SW
- PRESSURE SW
- ROTARY SW
- DIP SW
- TACT SW
- LIGHTED TACT SW
- KEYLOCK SW
- SAFETY & CONTROL SW
- VEHICLE SW

SOCKET

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

POTENTIOMETER

CONNECTOR

WATERPROOF CONNECTOR

WATERPROOF PARTS

PCBA

NEW PRODUCT

Products Search

Search



OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [PB-4067, PB-4166](#) ▶ [PB-4067, PB-4166](#)

SWITCH / PUSH SW

PB-4067, PB-4166
Foot Switches, 4A 125VC, Metal Actuator to Withstand Stomping, DPDT or 3PDT, Lock or Momentary

Foot switches suitable for musical instruments
Metal actuator to withstand Stomping
ON-ON locking or ON-(ON) momentary position
Soldering terminals or PCB pins
DPDT or 3PDT

[PDF Download](#)

[Get Information](#)

[Print this page](#)




ZOOM IN

Feature

- Rating: 4A 125VAC/ 2A 250VAC
- Contact Resistance: 50mΩ Max.
- Insulation Resistance: DC 500V 100MΩ Min.
- Dielectric strength: AC 1500 1 Min.
- Electrical Life: 50,000 cycles for double-pole ones, 20,000 cycles for triple-pole ones
- Operating Temperature: -20~ 65 degree C
- M12 P0.75 busing
- Solder or PC through hole terminals
- ON-ON or (ON)-ON function
- Nut and bushing accessories attached

Panel Cutout




Panel Thickness :
3.0mm Max.

Specification




PB4166-1
ON-ON

PB4166-1M
ON-(ON)

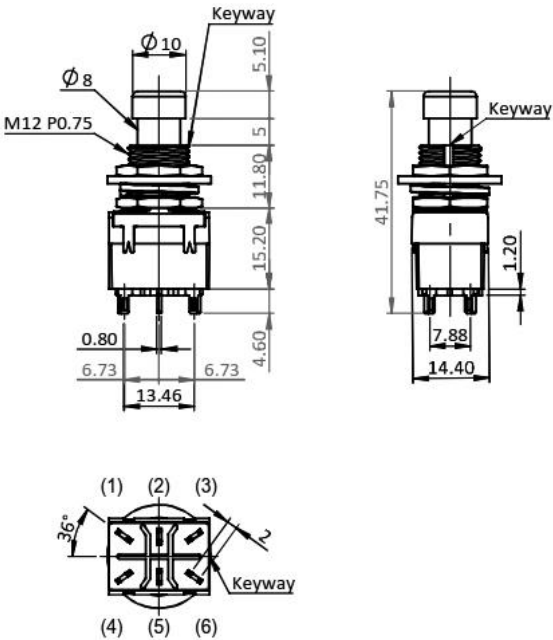


PB-4166-1P
ON-ON

PB-4166-1PM
ON-(ON)

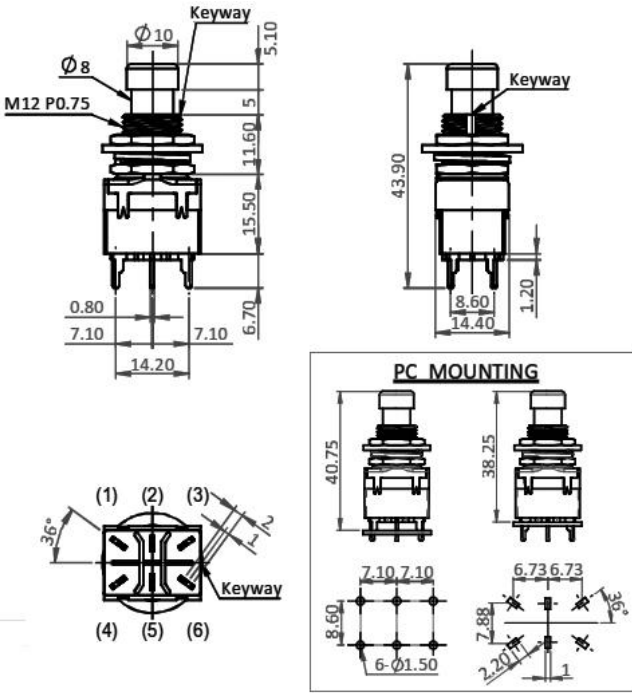

PB-4067
ON-ON

PB-4067M
ON-(ON)

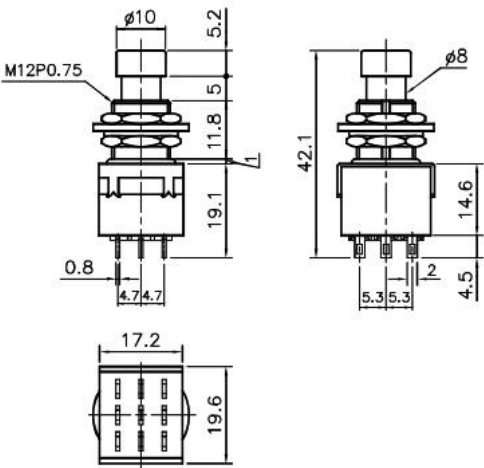

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserve