



: CAT6A FLUKE ZX

/: 07/25/2016 03:22:53 PM

8.9 dB (NEXT 45-78)

: TIA Cat 7 Channel

: Cat 6A F/UTP

03/16/2015

: Your Name

: 2.7700

: 1.9400

NVP: 70.0%

: DTX-1800


S/N: 2492029

S/N: 2492030



: DTX-CHA002

: DTX-CHA002



(ft), 328	12]	16
(ns), 555	36]	25
(ns), 50	36]	1
()	78]	1.7
(dB)	12]	33.4
(MHz)	12]	250.0
(dB)	12]	35.9





(T568A)

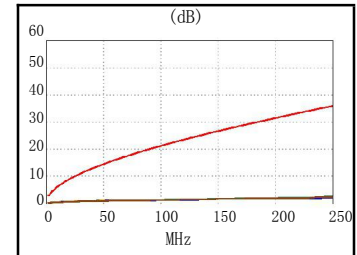



	SR		SR	
NEXT (dB)	45-78	45-78	45-78	45-78
(MHz)	9.2	8.9	9.7	9.9
(dB)	187.5	187.5	226.0	225.0
(dB)	35.3	35.3	33.9	33.9
PS NEXT (dB)	78	45	78	45
(MHz)	10.3	10.4	11.4	10.4
(dB)	184.0	224.0	229.5	226.0
(dB)	32.5	31.0	30.8	30.9

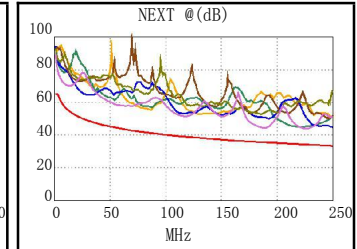



	SR		SR	
ACR-F (dB)	45-3636-45	45-3636-45	45-3636-45	45-3636-45
(MHz)	21.8	21.7	21.8	21.7
(dB)	236.0	236.5	236.0	236.5
(dB)	15.8	15.8	15.8	15.8
PS ACR-F (dB)	36	36	36	36
(MHz)	22.8	21.7	22.8	21.7
(dB)	207.5	242.0	241.0	242.0
(dB)	13.9	12.6	12.6	12.6

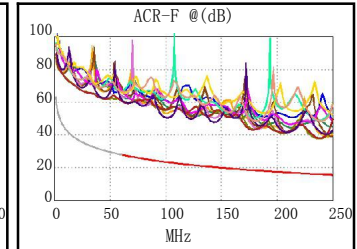

	SR		SR	
ACR-N (dB)	45-7845-78	45-7845-78	45-7845-78	45-7845-78
(MHz)	15.2	17.0	41.6	41.7
(dB)	3.0	3.9	226.0	225.0
(dB)	61.5	59.3	0.0	0.1
PS ACR-N (dB)	45	78	78	45
(MHz)	16.8	18.3	43.5	42.2
(dB)	3.3	3.9	229.5	226.0
(dB)	58.4	56.8	-3.4	-2.9

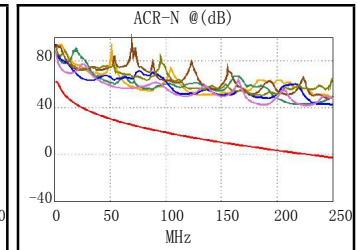

	SR		SR	
RL (dB)	36	36	78	78
(MHz)	2.2	1.7	3.6	2.8
(dB)	8.8	9.3	240.5	237.0
(dB)	19.0	19.0	8.2	8.3

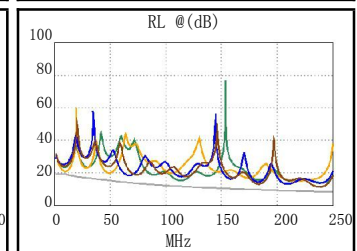

:
10BASE-T
1000BASE-T
ATM-155
TR-16 Active
100BASE-TX
ATM-25
100VG-AnyLan
TR-16 Passive
100BASE-T4
ATM-51
TR-4

: DEFAULT

: Client Name

1