

CUSTOMER COPY







REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Contact: brass JIS C3604(CuZn39Pb3)
Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0
Plating: see ordering information
Current rating: 1A
Voltage rating: 100VRMS/100V DC
Contact resistance: 10mΩ max.
Insulation resistance: 5000MΩ min. at 500V AC
Capacitance: 1pF max.
Dielectric strength: 1000VRMS min.
Sleeve retention force: 2.5Kg/contact min.
Operating temperature: -55°C to+105°C
Soldering temperature: 245±5° 5S
Critical Dimensions:▼

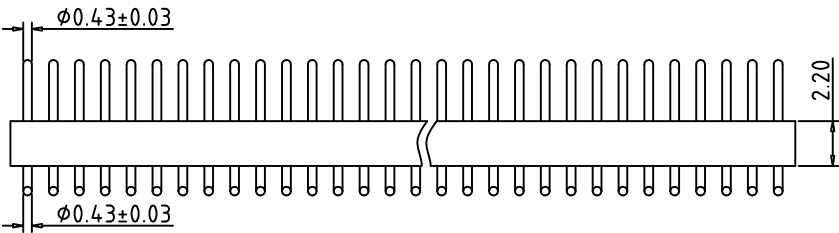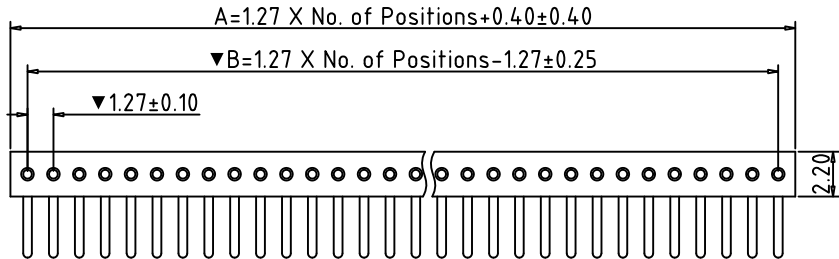

Recommended P.C.B Layout(±0.05)

PEB - NNN 1 - B P 1030A

No. of Positions	Insulator Type code	Pin Plating code
	1 Single row	1 Tin150μ"
	2 Double row	2 Tin200μ"
		3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special

Packing		natconn® 广东纳特康电子股份有限公司				
1.General		GUANGDONG NATCONN ELECTRONIC CO.,LTD				
2.Tape&Reel		TOLERANCE:	PROJECTION	TITLE:		
3.Tube		ANGLE ±2°	DATE	2010/04/01	1.27mmPitch SIP Adapters Right Angle	
4.Tray		X.XXX ±0.05	DRAWN	唐建平	CUSTOMER: N/A	CUSTOMER P/N: N/A
5.Other		X.XX ±0.25	CHECKED	雷邦军	PART NO.:	DRAWING NO.:
		X.X ±0.35	APPROVED	冯显东	PEB-NNN1-BP1030A	REV: A
		X. ±0.50			SIZE: A4	UNIT: mm
					SCALE: 1:1	SHEET: 1/1