


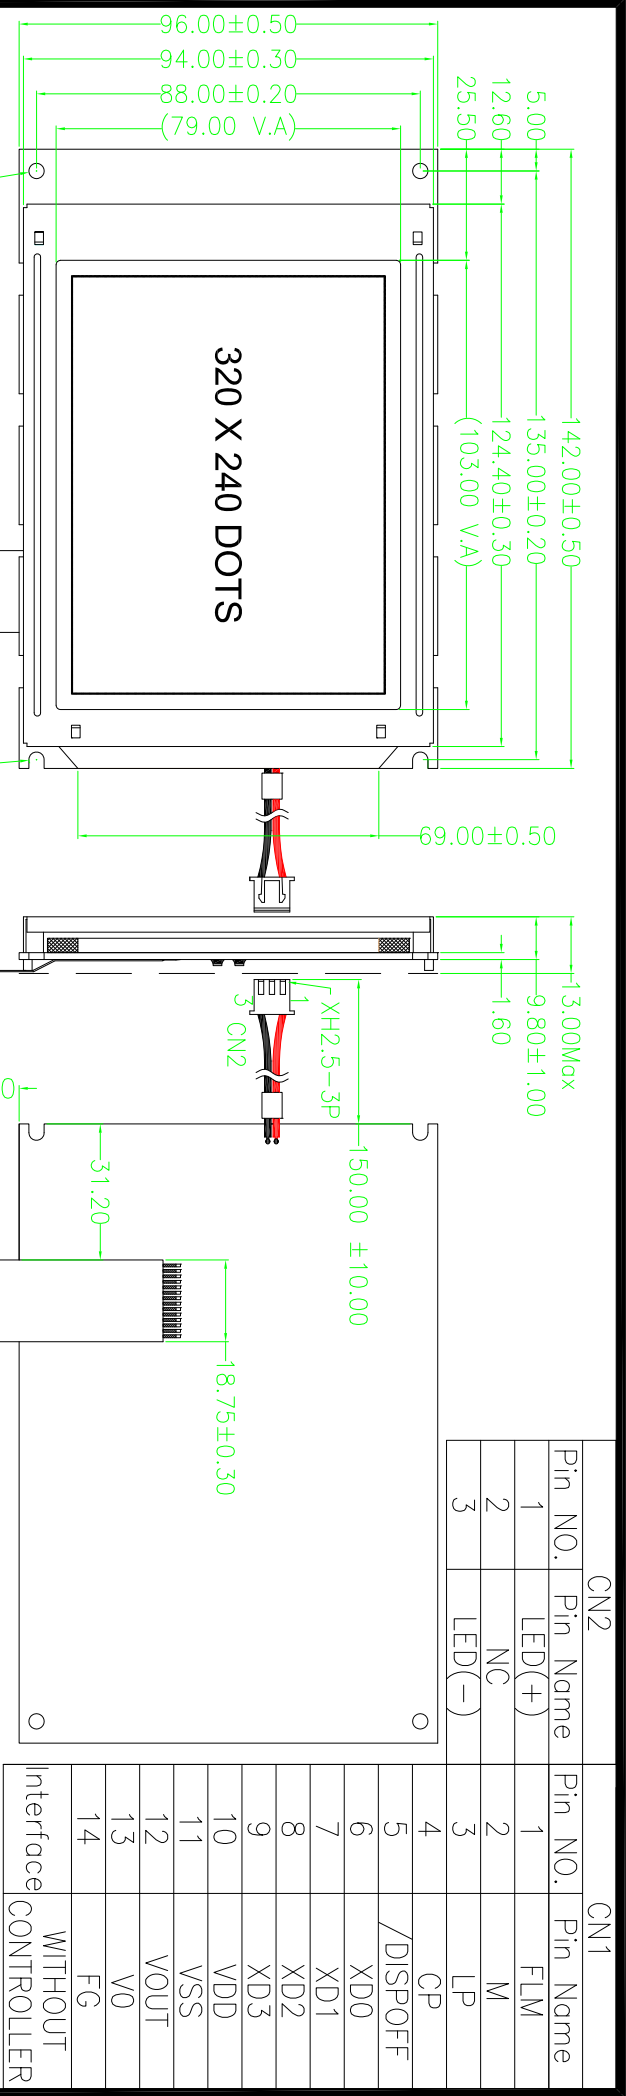


CN2		CN1	
Pin NO.	Pin Name	Pin NO.	Pin Name
1	LED(+)	1	FLM
2	NC	2	M
3	LED(-)	3	LP
		4	CP
		5	/DISPOFF
		6	XD0
		7	XD1
		8	XD2
		9	XD3
		10	VDD
		11	VSS
		12	VOUT
		13	V0
		14	FG
		WITHOUT INTERFACE CONTROLLER	


SPECIFICATIONS:

- 1.DISPLAY TYPE:STN/BLUE
- 2.VIEWING DIRECTION:6:00 O'CLOCK
- 3.POLARIZER MODE:TRANSMISSIVE/NEGATIVE
- 4.DRIVE METHOD:1/240 DUTY,1/16 BIAS
- 5.OPERATING TEMP:-20°C--+70°C
- 6.STORAGE TEMP:-30°C--+80°C
- 7.WORKING VOLTAGE:VDD-VSS=+5.0VDC
- 8.BACKLIGHT:WHITE;LED(+)-LED(-)=+5.0VDC
- 9.ALL UNMARKED TOLERANCES:±0.15mm/±0.5°

DETAIL DOTS



深圳市佳显电子技术有限公司
Shenzhen Goodview Electronic Technology Co.,Ltd



绘图: 李建清 Drawn by: Lian Jianqing	绘图编号: LCM-SJXD320240CDBSWMN Drawing No.: LCM-SJXD320240CDBSWMN	单位: mm Unit: mm
审核: 李建清 Checked by: Lian Jianqing	客户编号: 20240329 Customer No.: 20240329	日期: 2024-03-29 Date: 2024-03-29
批准: 李建清 Approved by: Lian Jianqing	图纸版号: V1 Drawing Version: V1	页教: 1/1 Sheet No.: 1/1
版本标记: 更改内容 Ver. Mark: Modify the content	更改人: 李建清 Modified by: Lian Jianqing	日期: 2024-03-29 Date: 2024-03-29