



Category

- SWITCH
- SOCKET
- INLET
- OUTLET
- IEC EMI FILTER
- RECEPTACLE
- PLUG
- WIRE HARNESS
- BREAKER
- FUSE HOLDER
- FUSE
- ENCODER
- INDICATOR
- POTENTIOMETER
- CONNECTOR
- WATERPROOF CONNECTOR
- WATERPROOF PARTS
- PCBA
- NEW PRODUCT

Products Search

Search



OUR PRODUCT

Home » Our Product » CW2B Series » CW2B Series

SOCKET / IEC EMI FILTER

CW2B Series
IEC60320 C14 Inlet, with EMI Filter,
Rocker Switch and Single Fuse, 3A, 6A
or 10A Rating in UL

Power entry module with EMI filter for electromagnetic protection
Approved by UL, CUL, CE & CQC
Standard C14 socket and mini-rocker switch with 13x19 international cutout
Quick connect terminals
Mounted by screws



ZOOM IN

PDF Download

Get Information

Print this page

Feature






- Rated Voltage: 115V/250VAC
- Frequency: 50/60Hz
- Rated Current: 3A/6A/10A
- Operating Temp: -25~+85°C
- Dielectric strength: 1450VDC (line to line): 2250VDC(line to ground)/1 min.
- Max. Leakage Current line to ground:
 - 0.25mA 115VAC 60Hz
 - 0.45mA 250VAC 50Hz

Specification

How to order

PART/NO. □□:03, 06, 10(A)	CX (uF)	CY (pF)	R (MΩ)	SCHEMATIC
CW2B-□□A-T(00)	0.1	3300		12
CW2B-□□A-T(01)			1.0	7
CW2B-□□A-T(03)				
CW2B-□□A-T(05)		2200		12
CW2B-□□A-T(07)	0.22		1.0	7
CW2B-□□A-T(08)	0.1			8
CW2B-□□A-T(09)	0.22			
CW2B-□□A-T(10)				7

L(mH):01A:3.7 03A:1.8 06A:0.8 10A:0.3

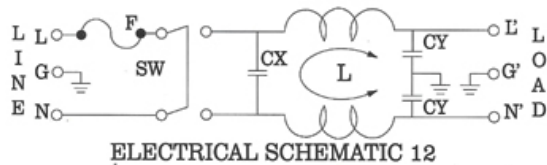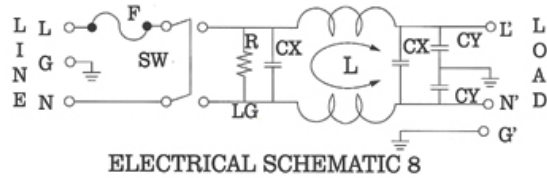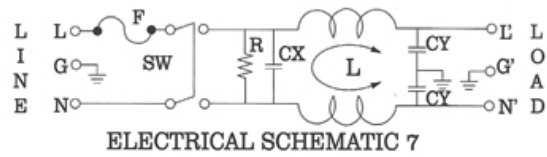


Min.Insertion Loss (dB) in 50 ohm system

Comm.Mode(L-G)in MHz							Diff.Mode(L-L)in MHz					
Amt	0.15	0.5	1	5	10	30	0.15	0.5	1	5	10	30
1A	34	38	40	32	28	11	11	9	37	71	62	13
3A	28	36	39	45	48	39	39	9	27	58	65	16
6A	19	29	36	49	53	39	39	8	25	57	60	32
10A	14	18	22	38	49	42	42	17	64	58	49	30

Item

Drawing

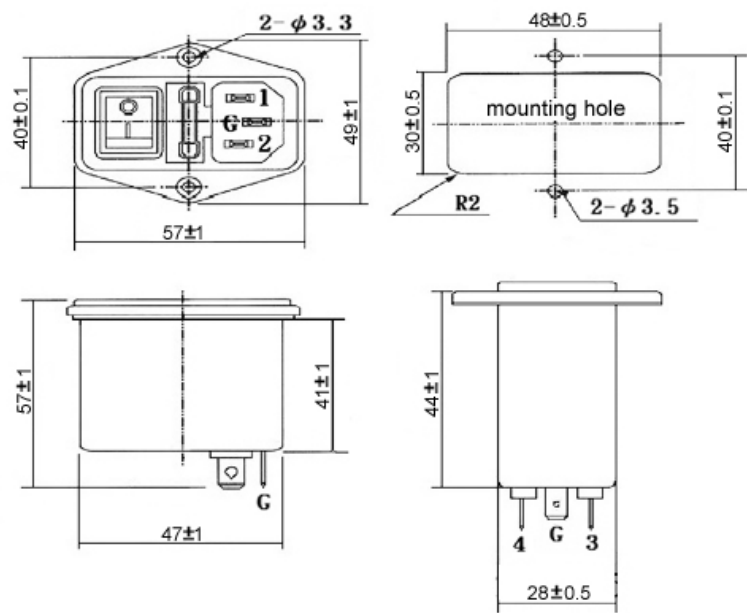

[BACK](#)



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved