



Data Sheet

Band28A Duplexer 1814

SPT718MADC1

2022/5/20

V1.1

Description:

The Spectron SPT718MADC1 is a miniature B28A duplexer designed for applications in LTE-A, CAT1, 5G NR, customer premise equipment, and mobile communication devices.

The SPT718MADC1 provides +29 dBm power handling, low insertion loss and high out of band rejection.

The design and manufacturing of the SPT718MADC1 exploit Spectron's exclusive TSAW technology to deliver competitive performance against state of the art at a low cost.

The SPT718MADC1 is compatible with high volume, lead-free SMT soldering processes.

Features:

- Single-Ended Input and Output
- Terminating Impedance: 50 Ω
- Compact miniature size
 - 1.8 mm $\times$ 1.4 mm footprint
 - 0.65 mm max-height
- Environmental
 - RoHS 6 Compliant

Specifications:

- Performance specified from -20°C to +85°C
- In-band insertion loss: 2.6dB Max for UL band
- In-band insertion loss: 2.6dB Max for DL band
- High out of band rejection
- High isolation between Tx and Rx:50dB Min

Applications:

- LTE-A
- 5G NR
- Communication Devices

Electrical Specifications

Table 1 Electrical Specifications: Tx to Ant.

Tx to Ant			Specification		
Parameter	Condition [MHz]	Unit	Minimum ¹	Typical ²	Maximum ¹
Insertion Loss	703.25 - 732.75	dB	-	2.6	3.2
Inband Ripple	703.25 - 732.75	dB	-	1.2	1.8
VSWR of Tx Port	703.00 - 733.00	-	-	1.3	2.1
VSWR of Ant Port	703.00 - 733.00	-	-	1.3	2.0
Absolute Attenuation	10.00 - 670.00	dB	30	35	-
	670.00 - 694.00	dB	25	30	-
	694.00 - 695.00	dB	25	30	-
	695.00 - 698.00	dB	9	27	-
	758.00 - 788.00	dB	50	53	-
	788.00 - 803.00	dB	18	23	-
	859.00 - 894.00	dB	30	38	-
	1225.00 - 1250.00	dB	23	29	-
	1406.00 - 1466.00	dB	22	27	-
	1559.00 - 1563.00	dB	22	27	-
	1565.42 - 1573.37	dB	22	27	-
	1573.37 - 1577.47	dB	22	27	-
	1577.47 - 1585.42	dB	22	27	-
	1597.55 - 1605.89	dB	22	27	-
	1805.00 - 1880.00	dB	22	27	-
	1930.00 - 1995.00	dB	23	28	-
	2010.00 - 2025.00	dB	23	29	-
	2109.00 - 2199.00	dB	15	22	-
	2400.00 - 2484.00	dB	15	23	
	2570.00 - 2620.00	dB	15	23	
	2812.00 - 2932.00	dB	15	21	
	4900.00 - 5950.00	dB	12	17	
					-

Table 2 Electrical Specifications: Ant to Rx.

Ant to Rx			Specification		
Parameter	Condition [MHz]	Unit	Minimum ¹	Typical ²	Maximum ¹
Insertion Loss	773.25 - 802.75	dB	-	2.6	3.2
Ripple Deviation	773 - 803	dB	-	1.0	1.8
VSWR of Rx Port	773 - 803	-	-	1.6	2.0
VSWR of Ant Port	773 - 803	-	-	1.6	2.0
Absolute Attenuation	10.00 - 703.00	dB	40	50	-
	703.00 - 733.00	dB	40	50	-
	824.00 - 849.00	dB	33	38	-
	880.00 - 915.00	dB	40	48	-
	1710.00 - 1785.00	dB	42	50	
	1850.00 - 1910.00	dB	42	50	
	1920.00 - 1980.00	dB	42	50	
	2400.00 - 2496.00	dB	35	42	-
	2496.00 - 2690.00	dB	35	42	-
	4900.00 - 5900.00	dB	23	33	-

Table 3 Electrical Specifications: Tx to Rx.

Tx to Rx			Specification		
Parameters	Conditions [MHz]	Unit	Minimum ¹	Typical ²	Maximum ¹
Isolation	703.00 - 733.00	dB	50	53	-
	758.00 - 788.00	dB	50	56	-

1. Min/Max specifications are guaranteed at the indicated temperature (unless otherwise noted).

2. Typical data is the average value (arithmetic mean) of the parameter over the indicated band at +25°C

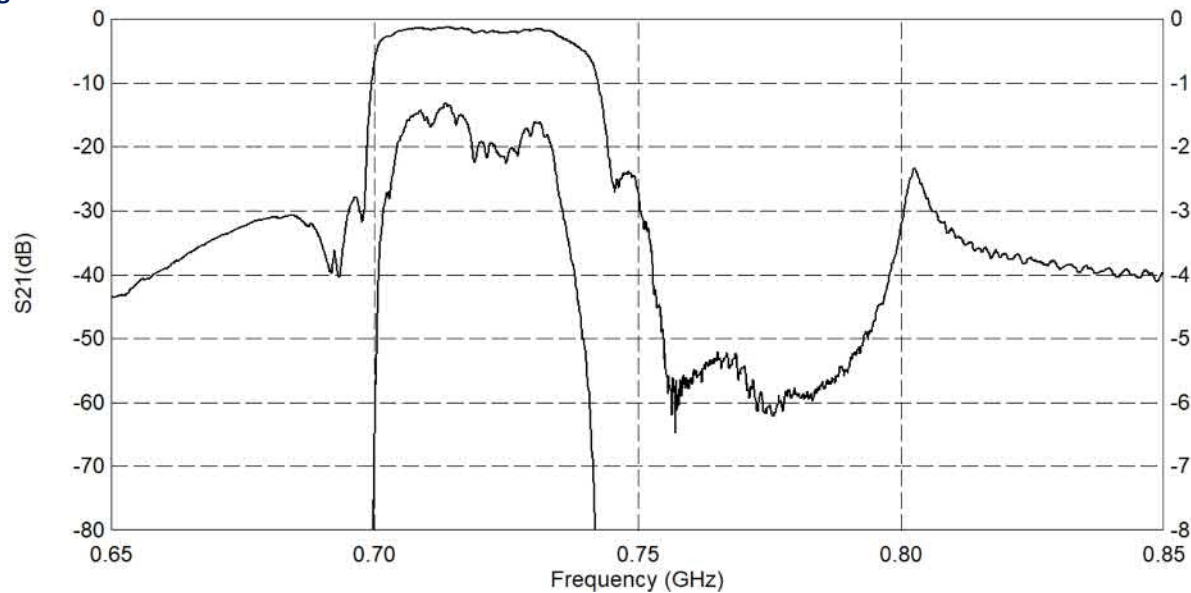
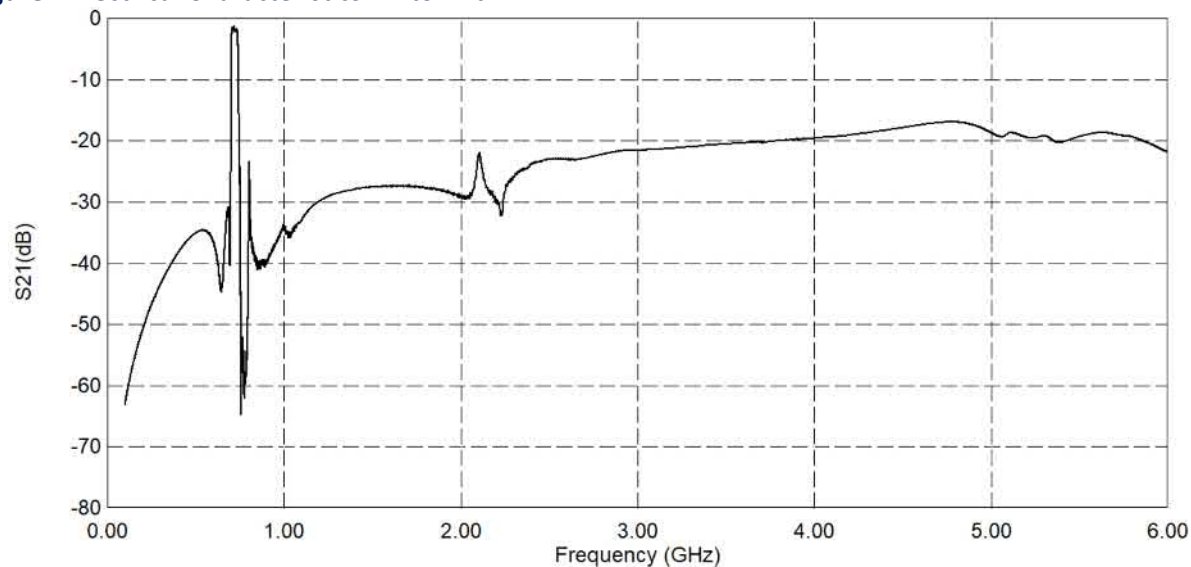
Figure 1 Electrical Characteristics: Tx to Ant.**Figure 2** Electrical Characteristics: Tx to Ant.

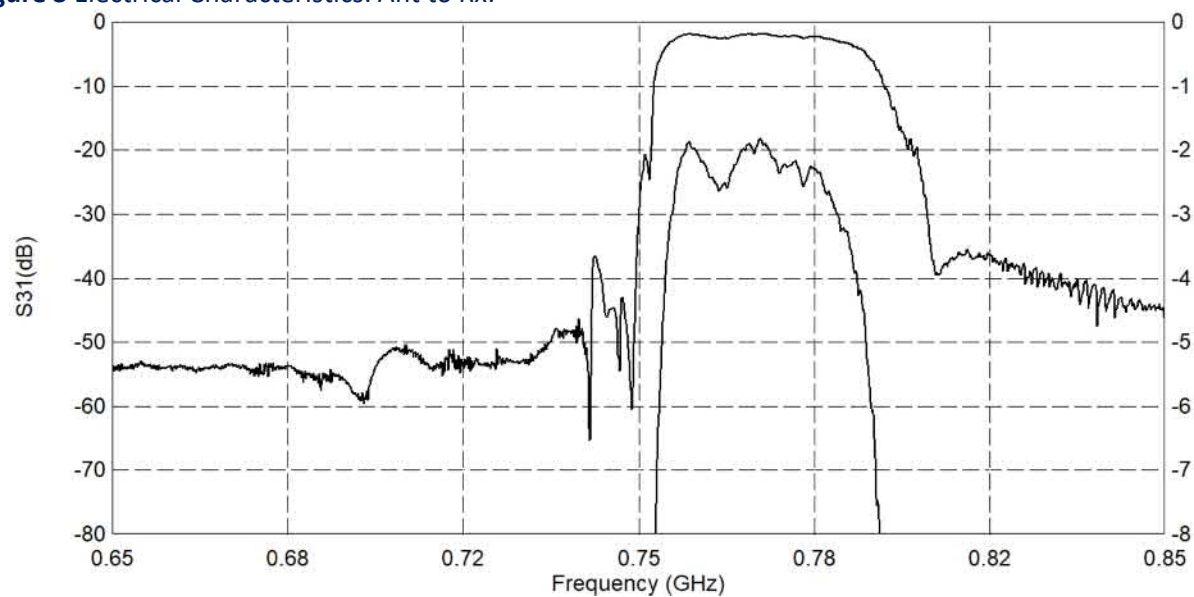
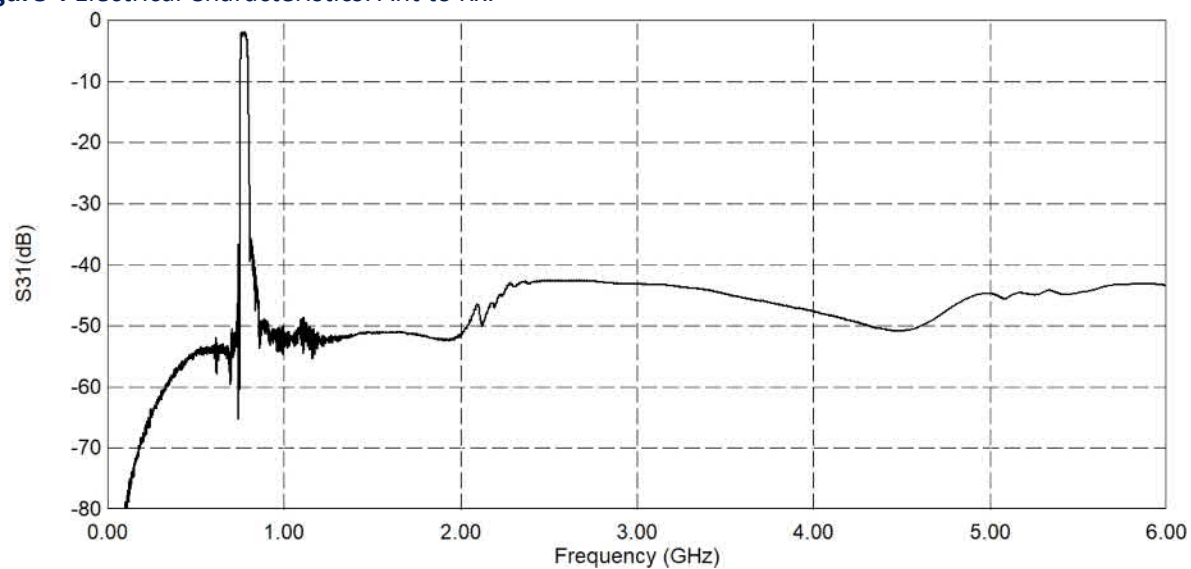
Figure 3 Electrical Characteristics: Ant to Rx.**Figure 4** Electrical Characteristics: Ant to Rx.

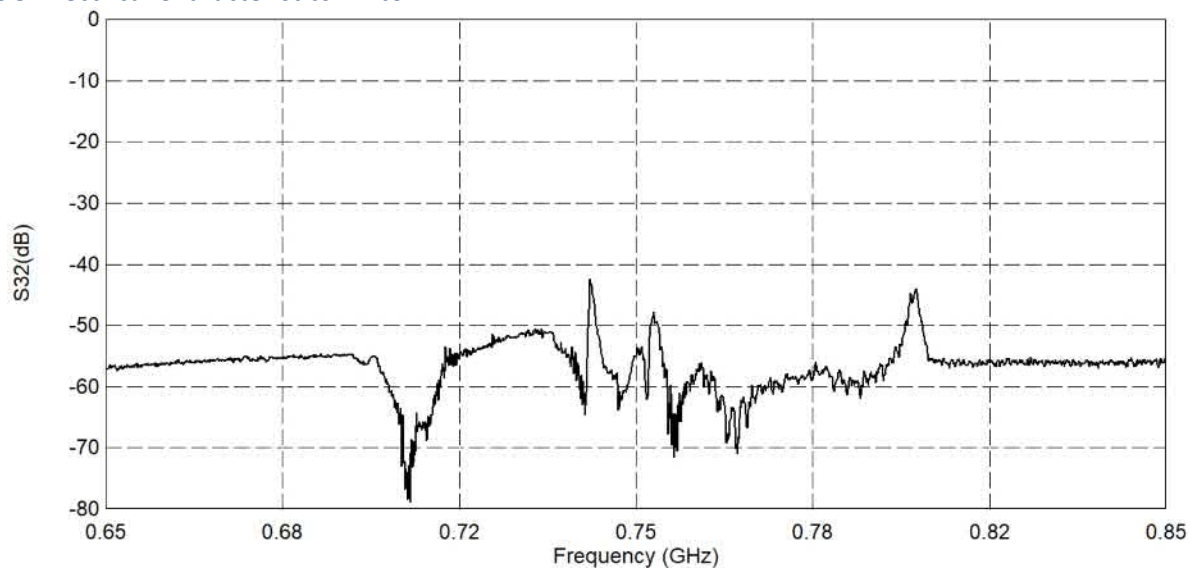
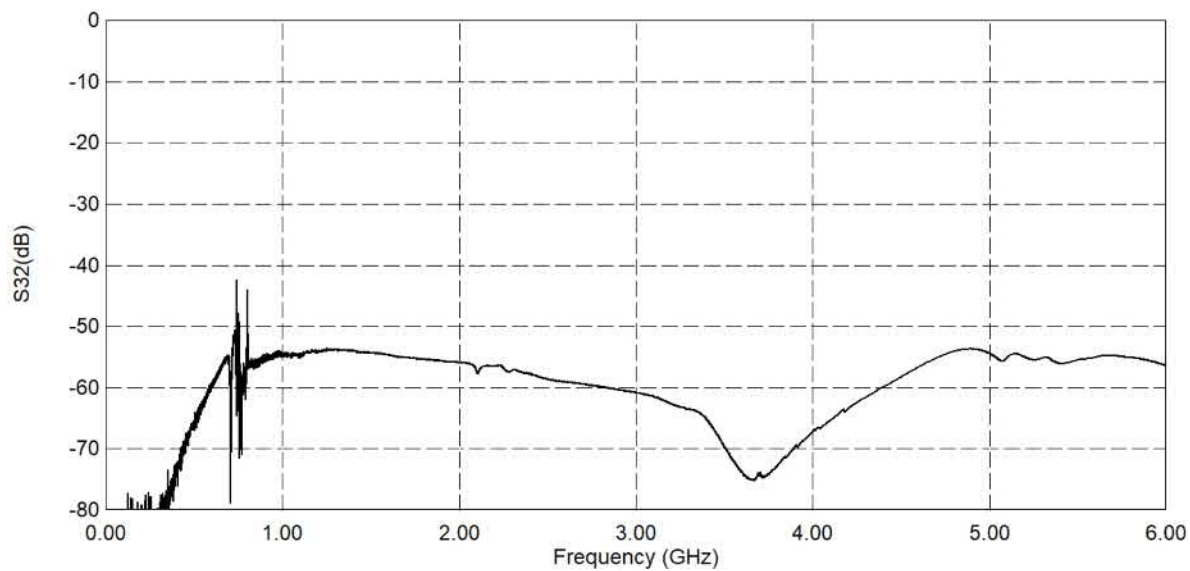
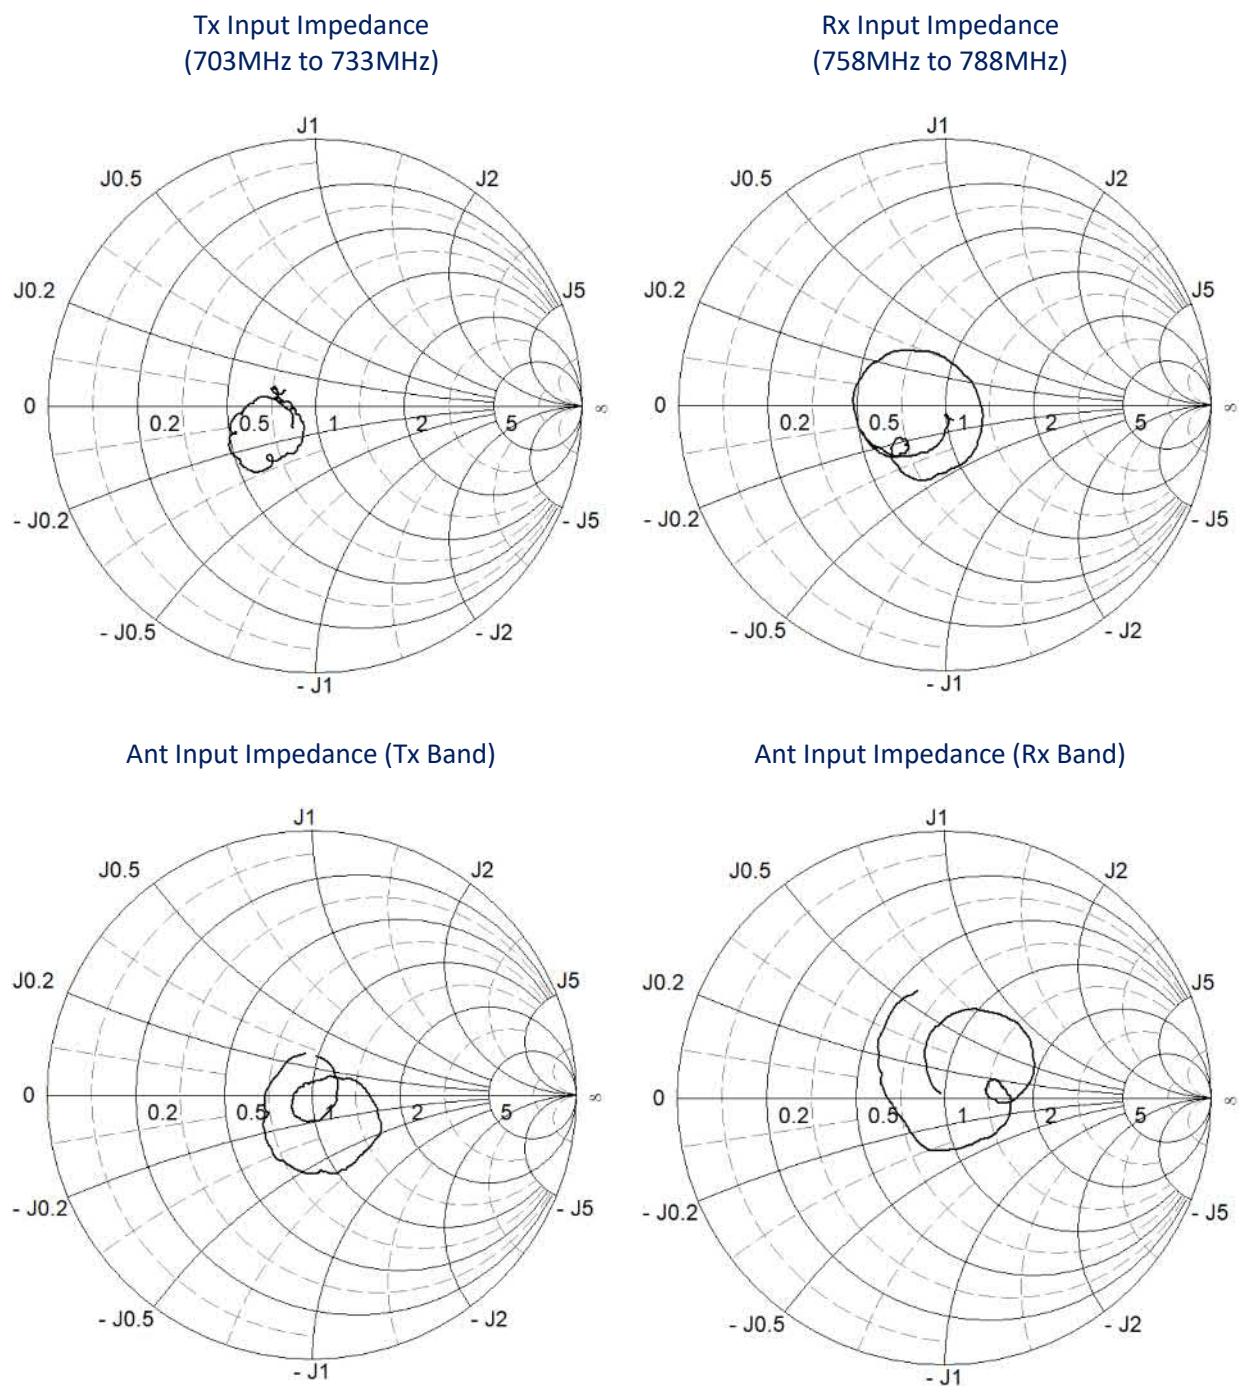
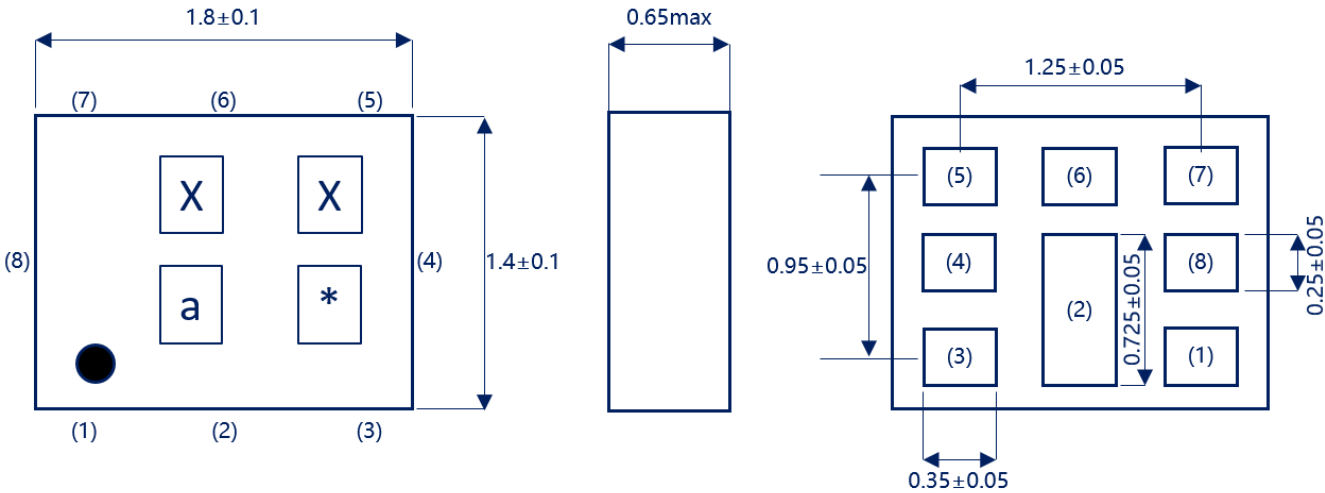
Figure 5 Electrical Characteristics: Tx to Rx.**Figure 6** Electrical Characteristics: Tx to Rx.

Figure 7 Input Impedances.

Package & Dimensions¹

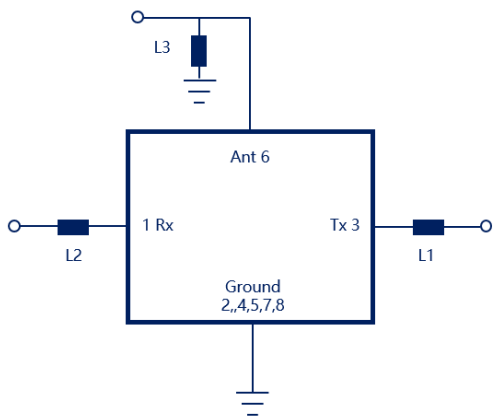


Marking Description	
XX	Band Code
a	Month Code
*	Date Code

Pin Configuration	
3	Tx
1	Rx
6	Antenna
2,4,5,7,8	Ground

1. All dimensions are in millimeters. Angles are in degrees.

Matching



Port	Matching Component ¹
Tx	L1 : 11.0 nH (Ideal inductor)
Rx	L2 : 5.1 nH (Ideal inductor)
Ant	L3 : 10.0 nH (Ideal inductor)

1. Matching component values shown are recommended based on Spectron evaluation board. Value adjustment may be required on the end-user's circuit boards for the selected component manufacturer and PCB material.

Maximum Ratings¹

Characteristic	Rating	Unit
Operating Temperature ²	-20 ~ +85	°C
Storage Temperature	-40 ~ +85	°C
Maximum Input Power ^{3,4}	+29	dBm
DC Voltage Between The Terminals ⁵	3	V
ESD Voltage (HBM)	> 100	V
ESD Voltage (CDM)	> 100	V
Moisture Sensitivity Levels	3	/

1. Operation exceeding any one of these conditions may result in permanent damage to the device.
2. The device will function over the recommended range without degradation in reliability or permanent change in performance but is not guaranteed to meet electrical specifications.
3. LTE modulation. Applies over a temperature range of TC = -20° to +85°C.
4. Maximum input power is only specified for input power to Tx port of SPT718MADC1 (Pin 3).
5. The DC resistance from Pin 1 and 3 (Tx/Rx) and Pin 6 (Ant) to ground (2-7) of this device is typically hundreds of kΩ to MΩ.

SMD Tape Packing and Pin 1 Mark Location**Recommended SMT Solder Profile****Ordering Information**

Part Number	Number of Devices	Container
SPT718MADC1	4000pcs	Tape and Reel

Spectron Technologies, Spectron Microsystems, and the Spectron logo are among the trademarks of Spectron and/or its affiliates in the People's Republic of China, certain other countries, and/or the EU.

Copyright © 2022 Spectron. All Rights Reserved.

The term "Spectron" refers to Spectron (Shenzhen) Technologies Co. Ltd and its subsidiaries.

Information furnished by Spectron is believed to be accurate and reliable. Spectron reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. However, Spectron does not assume any liability arising from the application or use of this information, nor the application or use of any product or circuit described herein. Neither does Spectron convey any license under its patent rights nor the rights of others.

