



VDE/KEMA Flexible Cord VDE/KEMA 电源线

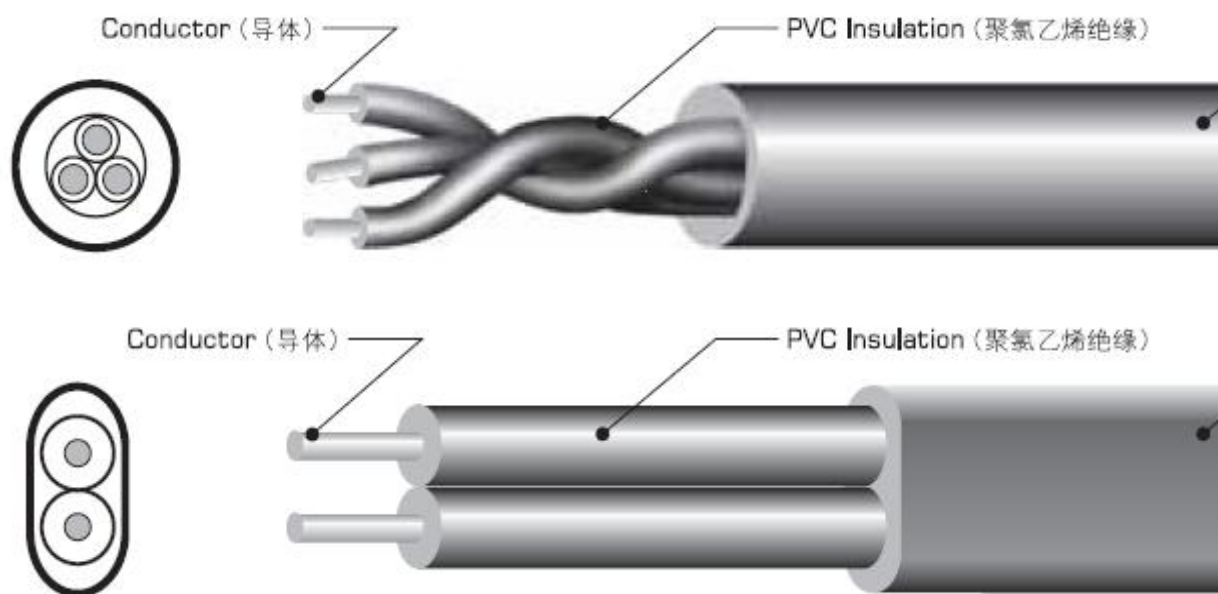

Product Description:

- ★ Rated temperature:70℃
Rated voltage:300V
- ★ According to: DIN VDE 0281
- ★ Stranded, bare copper conductor
- ★ Colour-coded lead free PVC insulation
- ★ Lead free PVC jacket
- ★ Application: Power supply wire, suitable for indoor small electrical instrument

AWG/No.of COND	Cores	Conductor			Insulation	
		Cross Section mm ²	No./mm	Dia. mm	Nom. Thick. mm	Nom.Dia. mm
H03VVH2-F	2	0.75	42/0.147	1.10	0.54	2.17
H05VV-F	2	0.75	24/0.2	1.13	0.65	2.43
H05VV-F	3	0.75	30/0.177	1.11	0.62	2.35

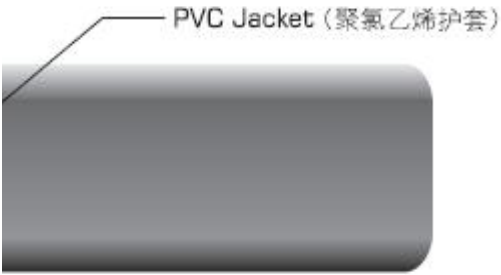

Jacket		Maximum Resistance at 20℃ Ω /km
Nom. Thick. mm	Nom.Dia. mm	
0.63	3.55×5.60	26.00
0.82	6.50	26.00
1.07	7.25	26.00