



PB26





SPECIFICAIONS:

- Circuit :SPDT
Rating :0.4VA 28VDC
Contact resistance :100mΩ Max
Insulation resistance :DC500V 100MΩ Min.
Withstand voltage :AC 500V for 1 minute ;
Operating force :200±100gf ;
Total travel :2.2±0.5mm
Mechanical life :Over 200,000 cycles ;
Electrical life :Over 30,000 cycles
Manual welding :350°C for 3 seconds
Operating temperature e :-25°C~+70°C



MATERIAL:

- Base:PA66,UL rated:94 V-2 Min.
Cap:PC
Terminal:Brass, Golden plated;



CIRCUIT

P.C.B. LAYOUT

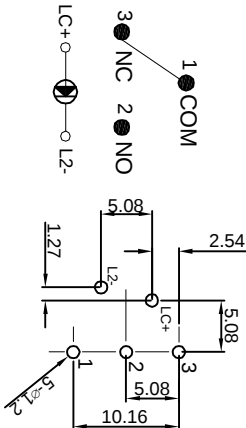

LED SPECIFICATIONS			
R2	高光红色	1.7	2.3
W2	超亮白色	2.7	-
G1	翠绿色	3.5	4.0
Y	高光黄色	1.7	2.3
W	白色	2.9	3.6
U	普通蓝色	2.7	3.3
O	普通橙色	1.75	2.35
R	Red 红色	G 超绿色	2.7
Cap Color (X)	最小	一般	最大
打灯功率(W)	最小	一般	最大

Note:
1.This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350±5°and time is 3±0.5 seconds;
2.After the product is welded on the PCB board,it is prohibited to use any solvent to clean the PCB board,and avoid the influence of the inner product.

A3	增加产品焊接使用说明	2016.07.29	N/A	公差 TOLERANCES		.X±0.3	.XX±0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT	mm.	图 号 DRAWING NO
A2	修正电气等级 :0.4VA 28VDC	2015.08.25	N/A	视 角		比 例 尺	NONE	日 期	PB26-13M-B-WR-R-N-T (特稿品)	DRAWING NO	CP_A3		
A1	产品编码更新 *产品型号重新编制.	2014.03.08	N/A	VIEWING ANGLE		SCALE	2016.07.29						
A0	New Issue	2012.05.10	N/A	核 准	核 对	Sinc	绘 图						
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	Richard	CHECKED BY	Sinc	姜庆勇					