





Pitch	0.3mm, 0.5mm, 0.8mm, 1.0mm, 1.25mm, 1.5mm, 2.0mm or 2.54mm
Pin	4 pin to 60 pin or according to request
Conductor plating	Tin or gold
Material	UL 20624, 80°C, 60V UL 20706, 105°C, 60V or others
Length	According to request

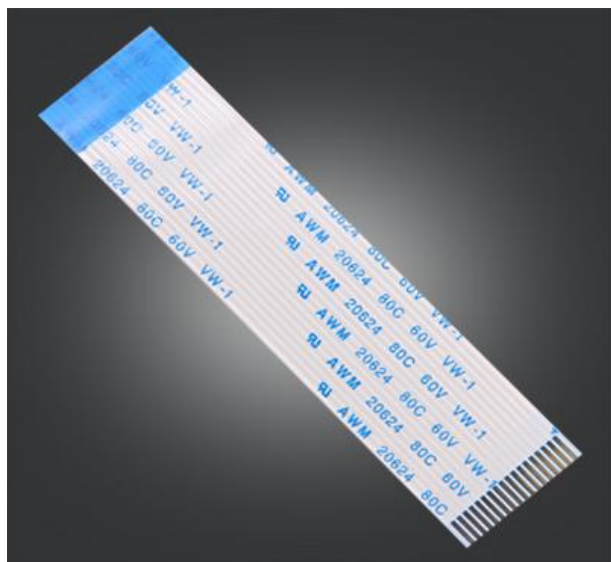


Pitch	0.3mm, 0.5mm, 0.8mm, 1.0mm, 1.25mm, 1.5mm, 2.0mm or 2.54mm
Pin	4 pin to 60 pin or as request
Conductor plating	Tin or gold
Material	UL 20624, 80°C, 60V UL 20706, 105°C, 60V or others
Length	As request
Shape	As request

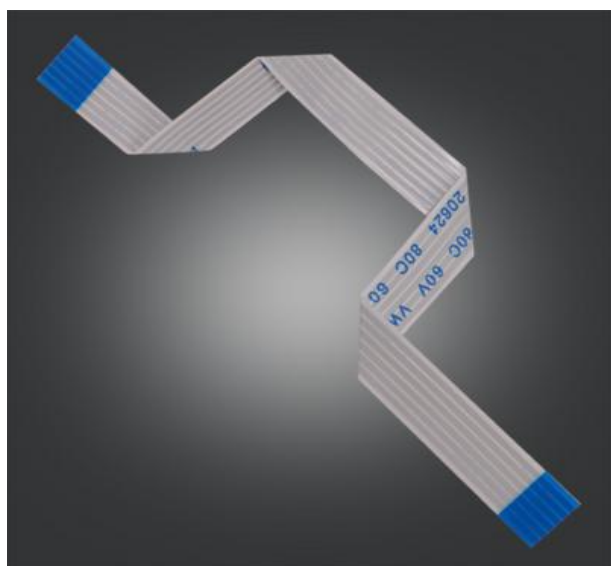


FFC Cable with Anti-interference Shield

Pitch	0.3mm, 0.5mm, 0.8mm, 1.0mm, 1.25mm, 1.5mm, 2.0mm or 2.54mm
Pin	4 pin to 60 pin or as request
Conductor plating	Tin or gold
Material	UL 20624, 80°C, 60V UL 20706, 105°C, 60V or others
Length	As request

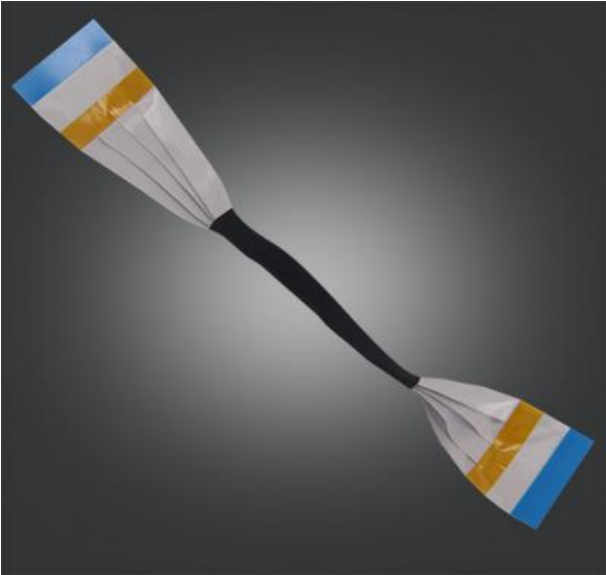

Shape	As request
Pitch	0.3mm, 0.5mm, 0.8mm, 1.0mm, 1.25mm, 1.5mm, 2.0mm or 2.54mm
Pin	4 pin to 60 pin or as request
Conductor plating	Tin or gold
Material	UL 20624, 80°C, 60V UL 20706, 105°C, 60V or others
Length	As request
Shape	As request

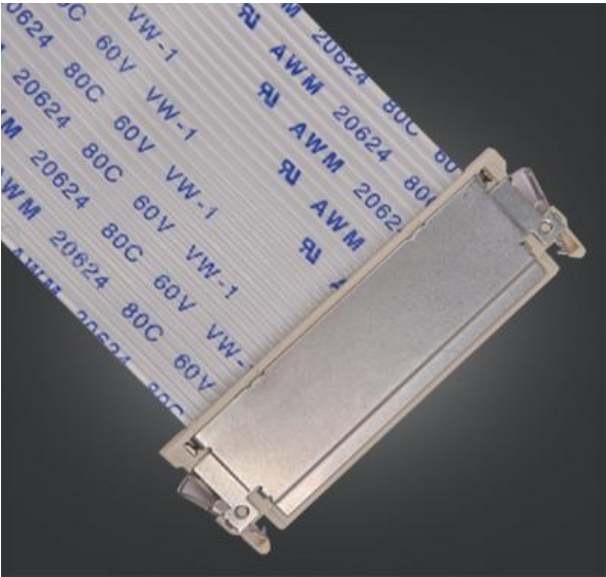

FFC Cable with Connector	
Pitch	0.3mm, 0.5mm, 0.8mm, 1.0mm, 1.25mm, 1.5mm, 2.0mm or 2.54mm
Pin	4 pin to 60 pin or as request
Conductor plating	Tin or gold
Material	UL 20624, 80°C, 60V UL 20706, 105°C, 60V or others
Length	As request
Shape	As request

