


Module Picture

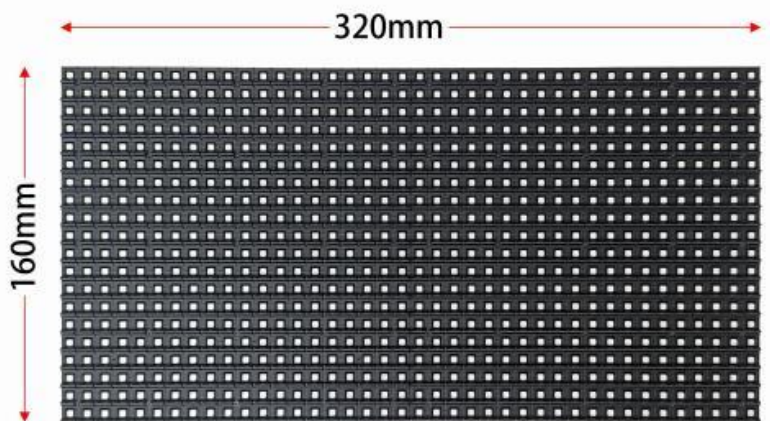

P8 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	8mm
2	Pixel Configuration	1R1G1B/SMD3535
3	Pixel Density	15,625 pixel/m ²
4	Module Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	960mm×960mm×100mm
6	Module Resolution	40×20
7	Cabinet Resolution	120×120
8	Driving Method	1/ 5 Scan
9	Driving IC	16380S
10	Brightness	4500-5000/m ²
11	Contrast	6000 : 1

12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: <760W/m²
14		Average power: <300W/m²
15	Cabinet Weight	25kg
16	Color Temperature	2000K—9600K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	120°
19	Signal Processing	16bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m or Multimode500m
22	Frame Frequency	60 Hz
23	Refresh Rate	>3840Hz
24	Control Mode	Synchronous/Asynchronous
25	MTBF	>50000 hours
26	Life Span	100,000 Hours
27	Operating Temperature	Working : -20 ~ 65 °C
28		Storage : -40 ~ 85 °C
29	Environment Temperature	-30°C ~ 60°C
30	Power Supply	110-220VAC/5VDC
31	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)