

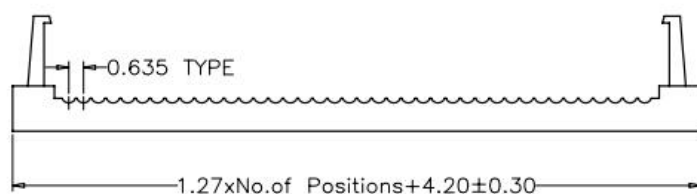

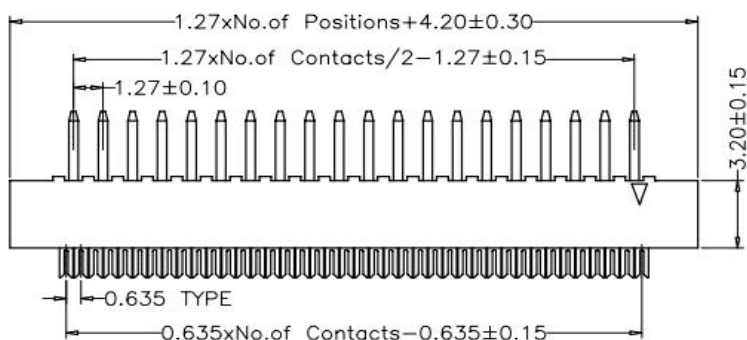


SPECIFICATIONS:

Rated Current	1.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au Over Ni
Insulator Material	PBT -UL94V-0
Max. Processing Temp:	180°C for 30-60 seconds 200°C for 10 seconds



Ordering Information

HC Series	No.of Pin Per Row	Contact Material	Plating Code	Insulator Option	Color Code	Packing Code	End code
HC-DIP40	10P-80P	B=Brass	SN=Tin	A=PBT	B=Black	T=Tube	01
1.27x2.54mm DIP			G0=Gold Flash	C=PA6T	G=Grey	A=Tray	
			S0=Gold Flash/Tin				