零件图	成品图	客户图
		O

REVISION DATA				
REV	ECN No.	DESCRIPTION	NAME	DATE
A0		NEW DRAWING	D.Y.Y	2022-04-11

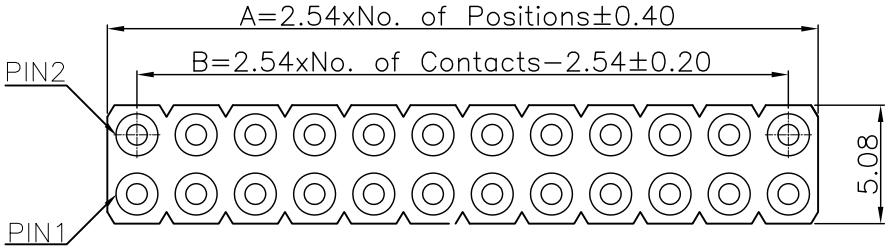

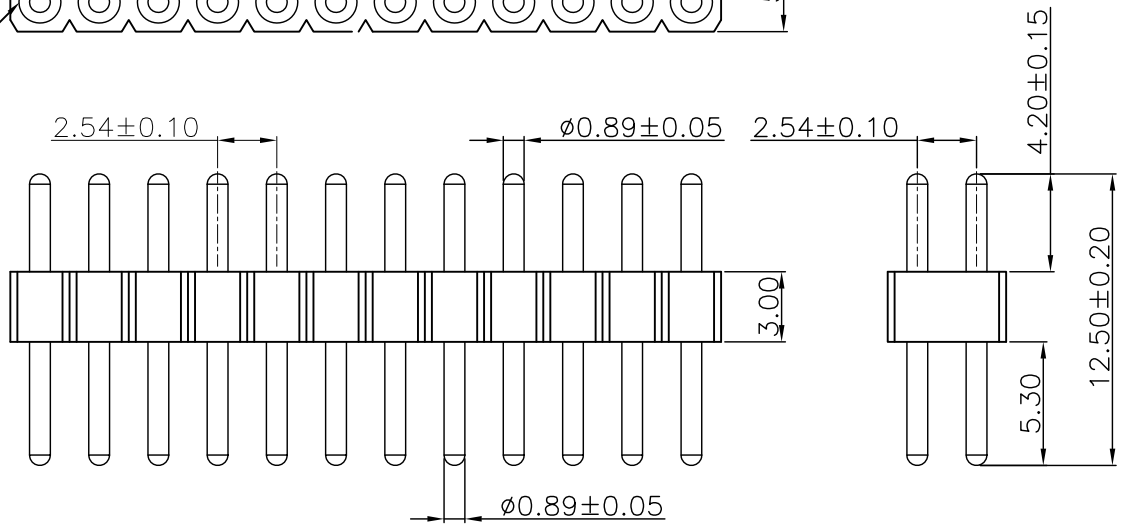

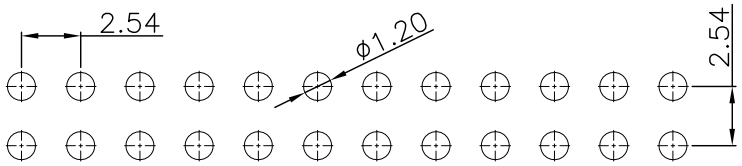

Recommended P.C.B Layout
General Tolerance±0.05

Technical Data

Material:
Pin(outer sleeve): Brass
Plating(outer sleeve):
Plating:
PIN:Tin/Ni plated
TERMINAL:Tin/Ni plated
Insulator black(housing): PPS

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operaing voltage: 60VAC/DC

Mechanical:
Operaing temperatures: Gold Plated:−55°C to+105°C
Tin plated:−40°C to+105°C
Soldering temperature: +260°C,10s max

PA

D	XXX	2	7	X	X	00	1250A	0	00
Angel Options	No. of Positions	Dip Spacing	Insulator Height	Insulator type	Pin Plated	Clip plated	Pin length(mm)	Insulator Option	Series
D 180°直插 R 90°折弯 S SMT H 卧式贴粘 A 单排SMT 第1Pin朝下 B 单排SMT 第1Pin朝上	XXX Positions	0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	0 No 1 1.20 mm 2 1.90 mm 3 2.00 mm 4 2.10 mm 5 2.20 mm 6 2.80 mm 7 3.00 mm 8 3.80 mm 9 4.10 mm A 4.20 mm B 7.00 mm S Special	A PBT单排 B PBT双排 C PBT中空 D PBT带柱 E PPS单排 F PPS双排 G PPS中空 H PPS带柱 I PA46单排 J PA46双排 K PA46三排 L PA66单排 M LCP四排	0 No 1 Tin120μ" 锡 2 Tin200μ" 3 Gold0.4μ" 金 4 Gold0.8μ" 5 Gold1μ" 6 Gold1.5μ" 7 Gold2μ" 8 Gold3μ" 9 Gold5u" A Gold8u" B Gold10u" C Gold15u" D Gold30u" E Ag plated F Nickel80u"	00 No	1250A 12.50mm S Special	0 No	00 No

ANYCONN®
www.enkcom.com
TEL:+86(0)769 8904 9672
FAX:+86(0)769 8904 9671
E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

TOLERANCE		DATE :	2022-04-11	TITLE: 2.54mmPitch SIP Sockets Straight Double Row Pin Length 12.50mm				
ANGLE	±5°	DRAWN :	D.Y.Y					
X.XXX	±0.15	CHECKED :		PART NO: PADXXX27XX001250A000				
X.XX	±0.25	APPROVED :						
X.X	±0.38							
X.	±0.50	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4	PAGE 1/1