

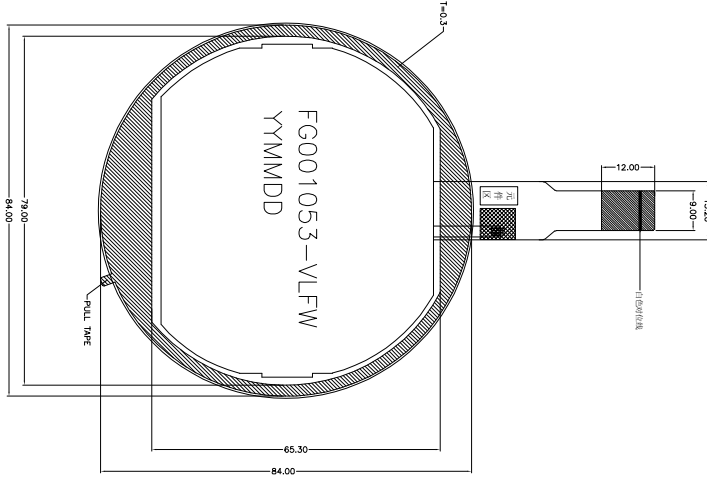


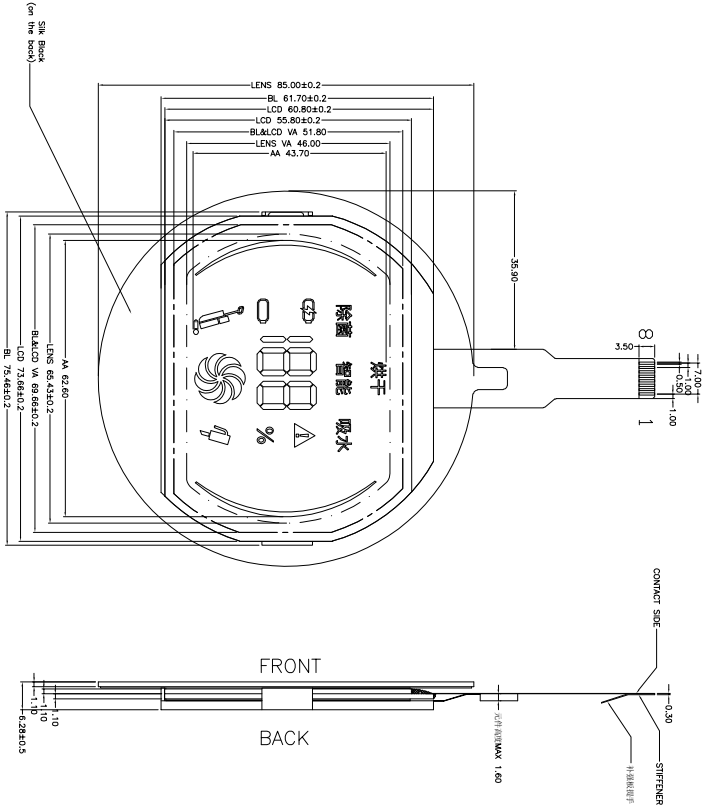


PIN ASSIGNMENT:	
1	VSS
2	VDD
3	SCL
4	ST
5	CS
6	RST
7	A
8	K



Note:

- 1.Display Mode:
- 2.Driving Condition:
- 3.Viewing Direction:
- 4.Operating Temp:
Storage Temp:
-20~+70°C
-30~+80°C
- 5.LCD Connector:
- 6.IC:
- 7.Backlight:
WHITE LED3*2,Vf8.1~9.6V,If28mA
- 8.Unspecified tolerance is ±0.20mm
- 9.ROHS Request
- 10.CONTROL DIMENSION: *
- 11.REFERENCE DIMENSION: ()
- 12.Customer P/N:



PIN SEG104	SEG103	SEG102	SEG101	SEG100	SEG99	SEG98	SEG97	SEG96	SEG95	SEG94	SEG93
SEG S1	S25	S24	S23	S20	S21	S22	T5	T6	T7	T8	T1
PIN SEG92	SEG91	SEG90	SEG89	SEG88	SEG87	SEG86	SEG85	SEG84	SEG83	SEG82	SEG81
SEG T2	T3	T4	S32	S19	S31	S16	TBC	2D	ZE	2F	2A
PIN SEG80	SEG79	SEG78	SEG77	SEG76	SEG75	SEG74	SEG73	SEG72	SEG71	SEG70	SEG69
SEG 2B	2G	2C	3D	3E	3F	3A	3B	3G	3C	S15	S17
PIN SEG68	SEG67	SEG66	SEG65	SEG64	SEG63	SEG62	SEG61	SEG60	SEG59	SEG58	SEG57
SEG S18	S30	S27	S26	S12	S11	S10	S9	S8	S7	S6	S5



深圳金视界光电科技有限公司
SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED

SCALE: 1/1	UNIT: mm	DATE	PAGE: 1/1	VER: V1.1
MODEL NO.: GVH001053-VLFW	APPROVE	CHECK	DESIGNER	
PART NO.:				

