


Terminal Blocks, PP & Steel Type

- Polypropylene, UL 94V-2 flame-retardant housing rated at 185 (IEC).
- Metal parts feature steel screws and zinc-plated steel contacts.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- U shaped contacts permit easy wire insertion.
- Easy cutting design makes it easier to be cut into desired number of poles.
- Pre-cutting is available upon request.
- Certified to IEC/EN 60958 and Recognized to UL 1058.

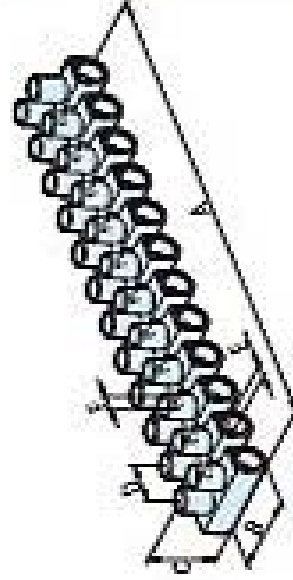

Cat. No.	Dimensions (mm/inches)							Screw
	Unit	A	B	C	D	øE	øF	
PA2U	mm	86.10	17.00	13.25	8.20	3.10	3.70	M2.5x5
	in.	3.780	0.669	0.522	0.323	0.120	0.146	
PA3U	mm	117.2	18.00	14.00	10.20	3.80	3.40	M3x6
	in.	4.614	0.704	0.551	0.399	0.149	0.133	
PMU	mm	139.8	23.40	17.10	12.20	4.00	4.50	M3.5x7
	in.	5.503	0.921	0.673	0.472	0.157	0.177	
PASU	mm	175.0	25.00	20.00	15.20	4.50	4.40	M4x8
	in.	6.880	0.984	0.787	0.598	0.177	0.173	

Cat. No.	Clamping Area	Color	No. of Poles	Electrical Ratings & Wire Range	Approvals	Packing
PA2U	6 mm²	White / Black	12	32A, 450V, T85°C 0.5-4 mm², Rigid/Flexible	CE   	Bag of 50 Carton of 500
PA3U	6 mm²	White / Black	12	41A, 450V, T85°C 1-6 mm², Rigid/Flexible	CE   	Bag of 50 Carton of 500
PMU	10 mm²	White / Black	12	57A, 450V, T85°C 2.5-10 mm², Rigid/Flexible	CE   	Bag of 40 Carton of 400
PASU	16 mm²	White / Black	12	70A, 450V, T85°C 4-16 mm², Rigid/Flexible	CE   	Bag of 25 Carton of 500