



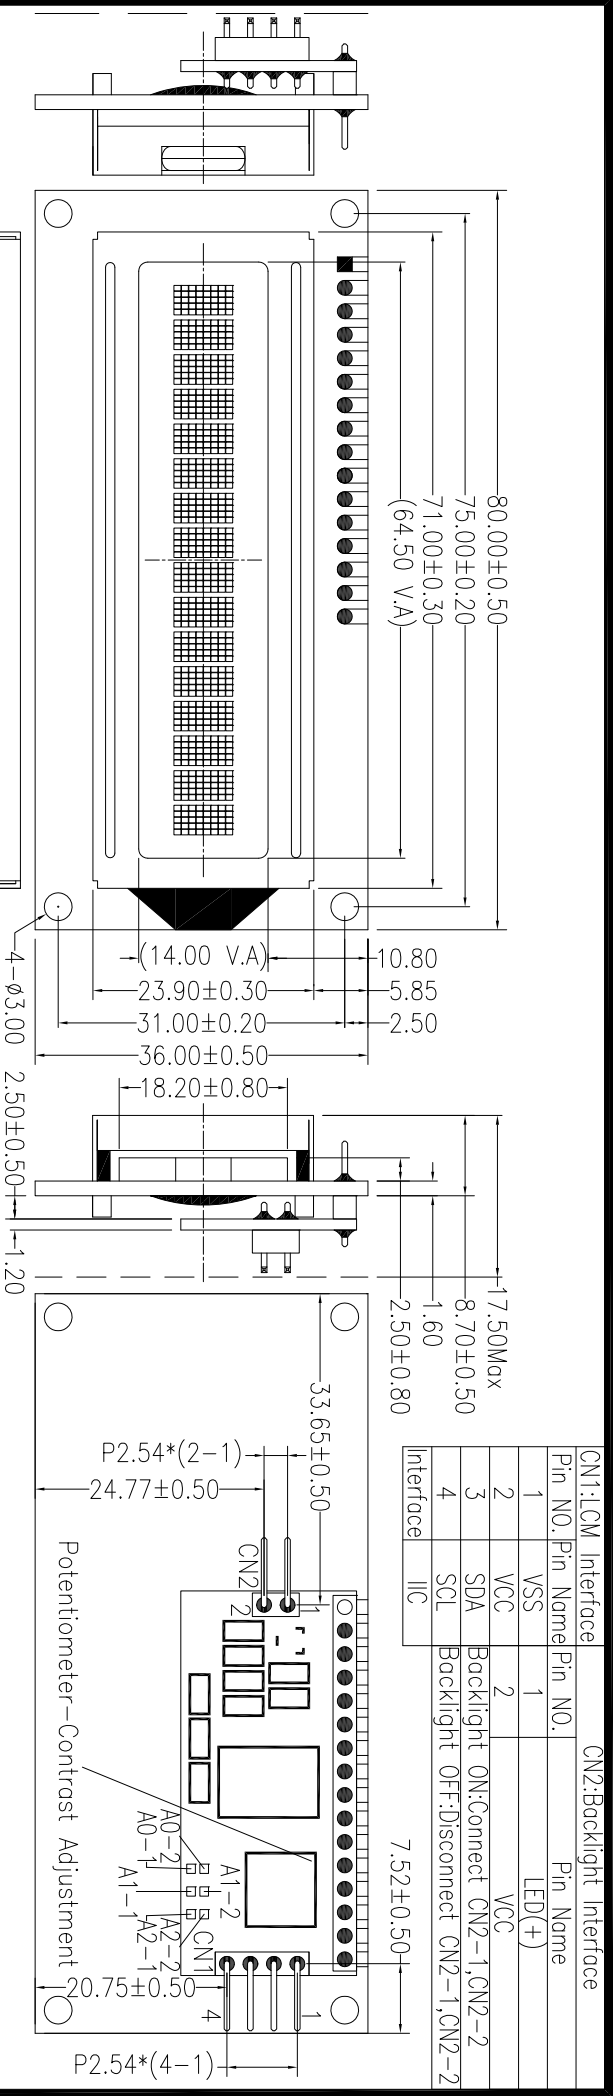

DETAIL DOTS

| INPUTS     |            |            | IIC BUS SLAVE ADDRESS |      |  |
|------------|------------|------------|-----------------------|------|--|
| A2-1,A2-2  | A1-1,A1-2  | A0-1,A0-2  | Connect               | 0x20 |  |
| Connect    | Connect    | Disconnect | Connect               | 0x21 |  |
| Connect    | Connect    | Disconnect | Connect               | 0x22 |  |
| Connect    | Disconnect | Connect    | Connect               | 0x23 |  |
| Connect    | Disconnect | Disconnect | Connect               | 0x24 |  |
| Disconnect | Connect    | Connect    | Disconnect            | 0x25 |  |
| Disconnect | Disconnect | Connect    | Disconnect            | 0x26 |  |
| Disconnect | Disconnect | Disconnect | Disconnect            | 0x27 |  |

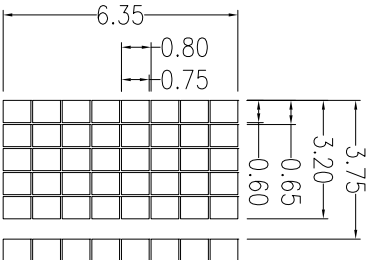

SPECIFICATIONS:

- 1.DISPLAY TYPE:YELLOW-GREEN/STN
- 2.VIEWING DIRECTION:6:00 O'CLOCK
- 3.POLARIZER MODE:TRANSPARENT/POSITIVE
- 4.DRIVE METHOD:1/16 DUTY,1/5 BIAS
- 5.OPERATING TEMP:-20°C---+70°C
- 6.STORAGE TEMP:-30°C---+80°C
- 7.WORKING VOLTAGE:VDD-VSS=+5.0VDC
- 8.BACKLIGHT:YELLOW-GREEN
- 9.ALL UNMARKED TOLERANCES:±0.20mm/±0.5°

深圳市佳显电子技术有限公司

ShenZhen Goodview Electronic Technology Co.,Ltd

绘图: 李建清

审核: 客户编号:

批准: 图纸版本号: V1

绘图编号: LCM-SJXD1601A-ZDYSJMN

客户编号:

日期: 2024-08-09

单位: mm

日期: 2024-08-09

页数: 1/1

版本 标记 更改 内容 更改人 日期 版本 标记 更改 内容 更改人 日期

Ver Mark Modify the content Modified by Date Ver. Mark Modify the content Modified by Date