


UL 20379 Computer Cable 屏蔽电脑线

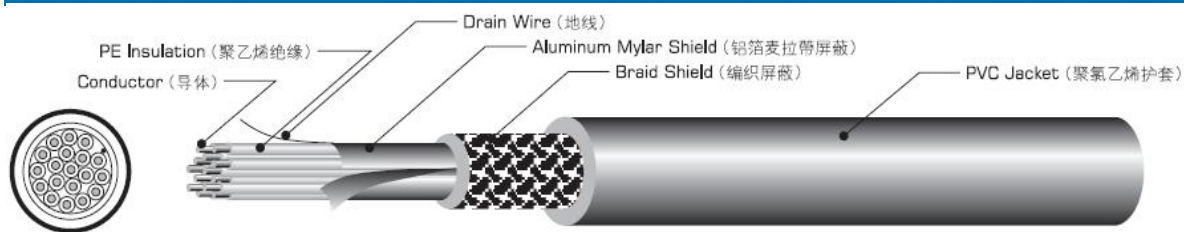

Product Description:

- ★ Rated temperature: 80°C
- Rated voltage: 30V
- ★ Reference Standard: UL Subject 758, UL1581 & CSA C22.2 No.210.2
- ★ Stranded, tinned or bare copper conductor
- ★ Lead free PVC jacket
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Application: For internal wiring or

Cores	Conductor			Insulation		Overall Shield		Jacket		Maximum Resistance at 20 °C Ω/km
	AWG	No./mm	Nom./Dia. mm	Nom. Thick. mm	Nom. Dia. mm	Material	Spiral No./mm Braid No./No./mm	Nom. Thick. mm	Dia. mm	
6	28	7/0.127	0.38	0.15	0.63	AL	16/5/0.1	0.5	3.40	223
8	28	7/0.127	0.38	0.12	0.63	AL	16/5/0.1	0.5	3.70	223
10	30	7/0.1	0.30	0.13	0.55	AL	16/5/0.1	0.5	3.40	354
18	30	7/0.1	0.30	0.14	0.55	AL	16/6/0.1	0.5	4.80	354
24	30	7/0.1	0.30	0.13	0.55	AL	16/7/0.1	0.5	4.55	354