

Standalone Fingerprint & RFID card Access Control System



Features

- Standalone access control terminal, interface for door lock, exit button
- Can be used as slave reader, connect with third party access controller through WG26/34
- Can work as master and connect with wiegand slave reader
- Default is ID card, optional IC card, 2000 cards capacity and 230 fingerprints
- Can set Public password independently or personal password of 4-6 digits
- Can set management card, to add or delete users cards and fingerprint
- Easy to delete the card if the card is lost, to enhance security level
- Enrolling user, deleting user and accessing control parameter settings by keypad easily
- Can open the door by Mobile APP (optional)
- User data can be imported into another machine by Wiegand connection
- Automatic card adding, easy to add multiple cards



Fingerprint



RFID



Touch Key



Door Bell



Access Control




Waterproof IP65
(optional)



Mobile APP
(optional)


Working Application

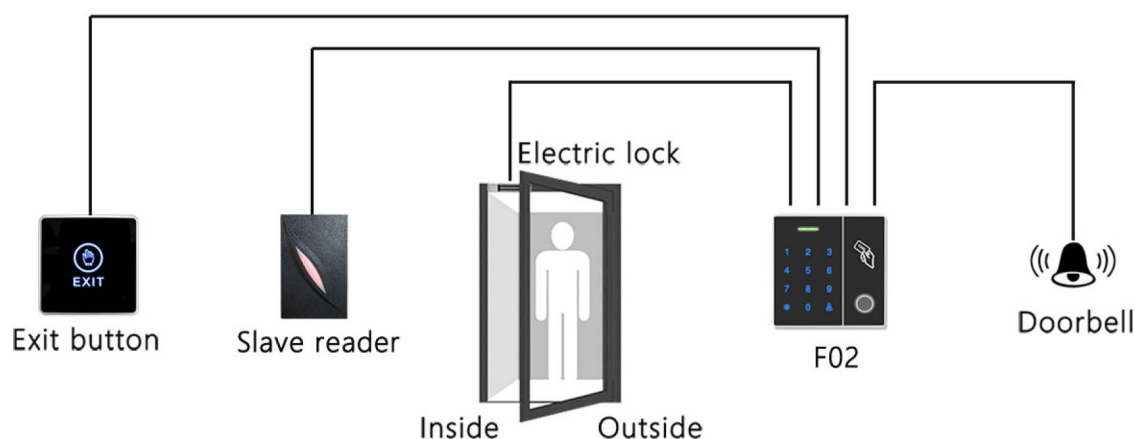

Specification

Model	F02
Verification Mode	Fingerprint, Card, Password, Fingerprint/Password/Card, Card & Password
Card reading distance	3~9cm
Capacity	2,000 cards, 230 fingerprints
Electric lock output	$\leq 2A$
Alarm Output	$\leq 1A$
Opening hours	0~99 seconds adjustable, (factory default is 5 seconds)
Ambient temperature	-35°C ~ 60°C
Operating Voltage	DC12V
Stand-by current	$\leq 30mA$
Waterproof level	IP65 (optional)
Dimensions	86x86x22mm

Optional accessories



Exit button



Magnetic lock



Power supply



Emergency switch



Doorbell