


确认此型号所有图纸 签字确认:

可视区内约有7个0.06*0.06的相交点
绿色易撕贴贴于面偏光片保护膜上

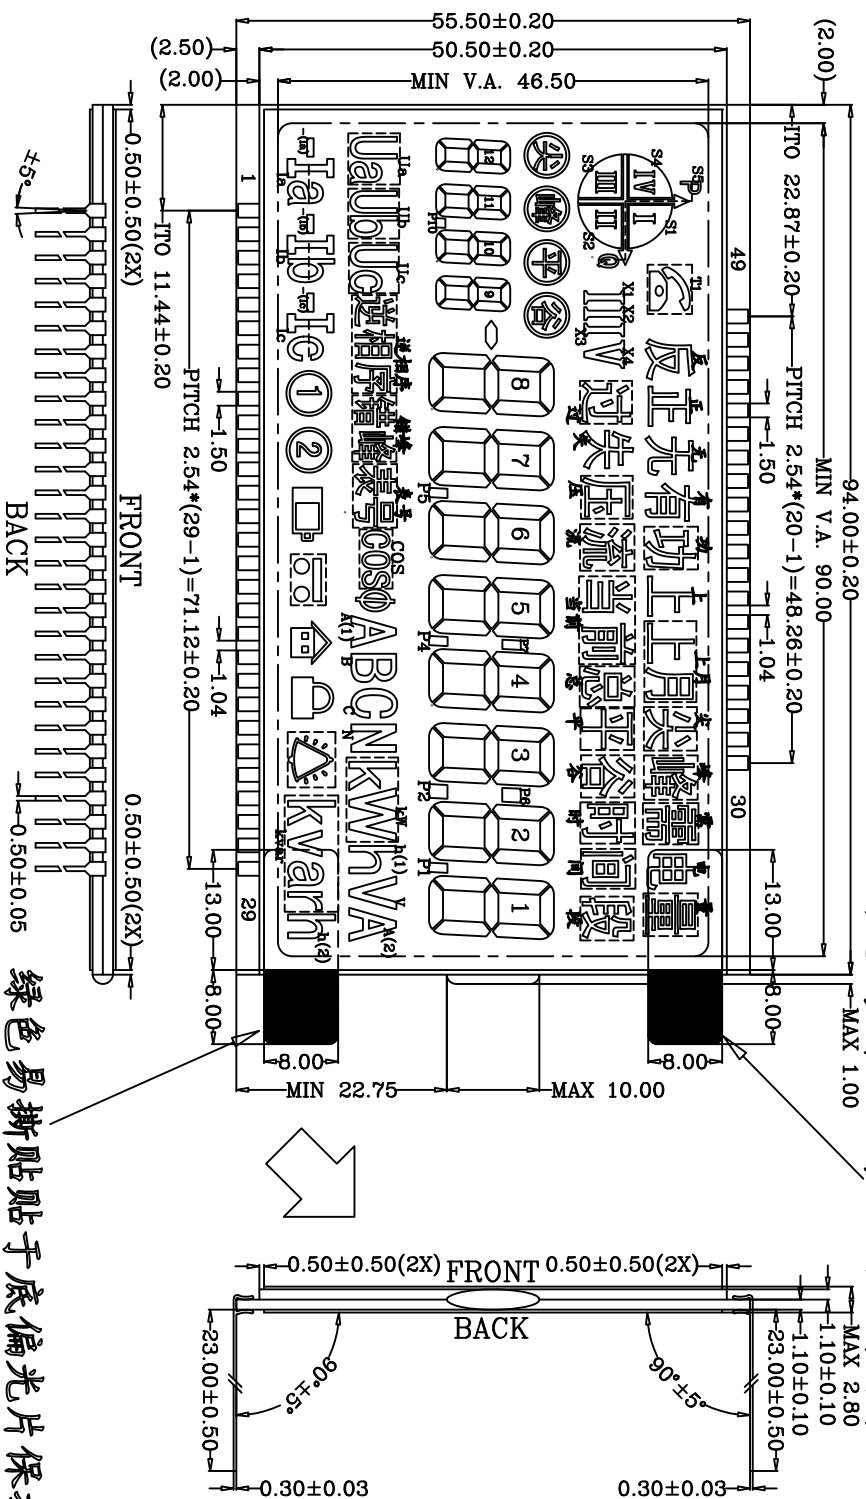

有双85要求，
要求时间：240小时

DISPLAY TYPE	HTN	DRIVE METHOD	1/4DUTY 1/3BIAS			
VIEWING DIRECTION	6 O' CLOCK	OPERATING VOLTAGE	3.0V(64Hz)			
DISPLAY MODE	POSITIVE	OPERATING TEMP	-30°C~+80°C			
REAR POLARIZER	TRANSELECTIVE	STORAGE TEMP	-35°C~+85°C			
CONNECTOR	PIN	CUSTOMER NO.		REV.	修改内容	日期



安徽金视界光电科技有限公司
GOLDEN-VISION CORPORATION SPECIFICATION.
TEL: 0559-2671866 FAX: 0559-2671805

MODEL NO.	DRAWN BY: ZXL	SCALE: 1:1	GENERAL TOL. ALL UNITS:	
GVH28007A			±0.20	mm
-HPP	CHECKED BY: HY	PAGE:	DATE:	