



LED Wall Lamp



CGE-WL-011

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 6W/10W

Luminous:550LM

CCT: 3000K/6500K/Colour

Materials: Aluminum

Size: 100*100*100mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, dooryard for led wall light





CGE-WL-008

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 5W

Luminous: 500LM

CCT: 3000K/4000K/6500K


Sensing angle : 120°

Materials: Metal

Size: 210*100mm

Install style: wall mounted, surface mounted

Application: Exhibition halls, bedrooms, living rooms, restaurants, art galleries, banquet halls, hotels, clubs, etc.

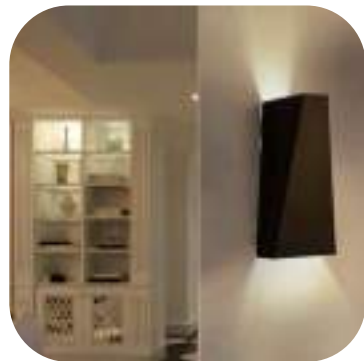



CGE-WL-003

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 2*3Watt

Luminous:600LM

CCT: 3000K/4000K/6500K

Sensing angle : 120°

Materials: Aluminum die-casting

Waterproof rating: IP65

Size: 150*68*92mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, doorway for led wall light



CGE-WL-009

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 12W

Luminous:700LM

CCT: 3000K/6500K/Red/Green/Blue


Materials: Aluminum

Size: 100*100*94mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, dooryard for led wall light



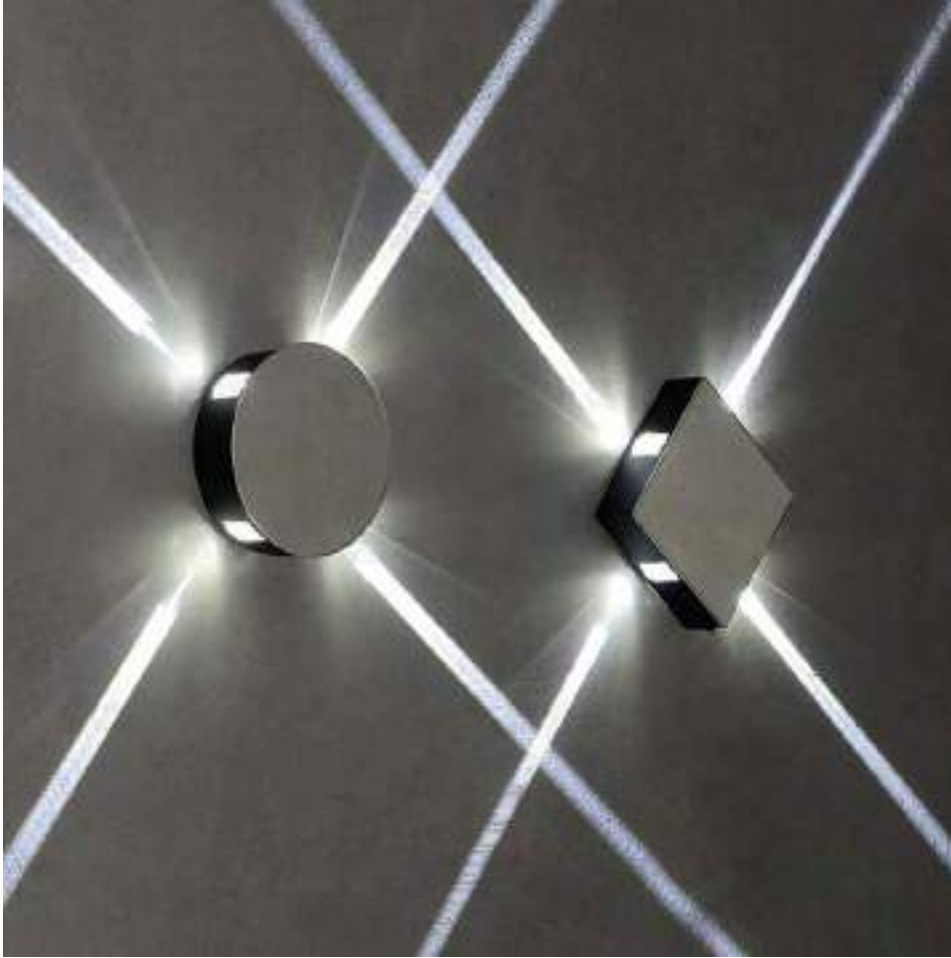

CGE-WL-020

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 3W/6W/9W/12W

CCT: warm white/ cold white

Materials: Aluminium

Size: 140*140*43mm

Application: Widely use in store, shop, hotel, room, office, exhibition room etc.





CGE-WL-010

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 2W/4W/6W

Luminous: 160LM/320LM/500LM

CCT: 3000K/6500K/Colour(Customizable color)

Sensing angle : 120°

Materials: Metal + acrylic

Size: 2W 80*50*50mm/ 4W 110*55*50mm/
6W 170*80*40mm

Install style: wall mounted, surface mounted

Application: Exhibition halls, bedrooms, living rooms, restaurants, art galleries, banquet halls, hotels, clubs, etc.





CGE-WL-025

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 6W

CCT: Warm white/ cold white

Materials: Aluminum

IP Rating: IP65

Body color: White/Black

Size: 200*70*45mm

Application: Bedroom, living room, corridor, exhibition hall, cafe, hotel, park, etc.





CGE-WL-012

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 2*E27 Lamp holder

6W/10W/14W

CCT: 3000K/6500K

Materials: Aluminum

Size: 130*340mm, 130*540mm, 130*760mm

Application: Exhibition halls, bedrooms, living rooms, restaurants, art galleries, banquet halls, hotels, clubs, etc.



CGE-WL-013

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 6W/10W/14W

CCT: 3000K/6500K

Materials: Aluminum

IP Rating: IP65

Size: 200*100mm, 300*125mm, 400*150mm

Application: Exhibition halls, bedrooms, living rooms, restaurants, art galleries, banquet halls, hotels, clubs, etc.





CGE-WL-021

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 6W/12W

CCT: warm white/ cold white

Materials: Aluminium

IP Rating: IP65

Size: 115*90*29mm/175*90*29mm

Application: Balcony, outdoor, entrance door, garden door, bedroom, bedside, picture, corridor wall, etc.





CGE-WL-023

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 7W

CCT: Warm white/ cold white

Materials: Aluminum

IP Rating: IP20

Body color: White/Black

Size: 110*62.5mm

Application: Bedroom, living room, corridor, exhibition hall, cafe, hotel, etc.





CGE-WL-024

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 5W

CCT: Warm white/ cold white

Materials: Iron + acrylic


IP Rating: IP20

Body color: White/Black

Size: 145*70mm

Application: Bedroom, living room, corridor, exhibition hall, cafe, hotel, etc.



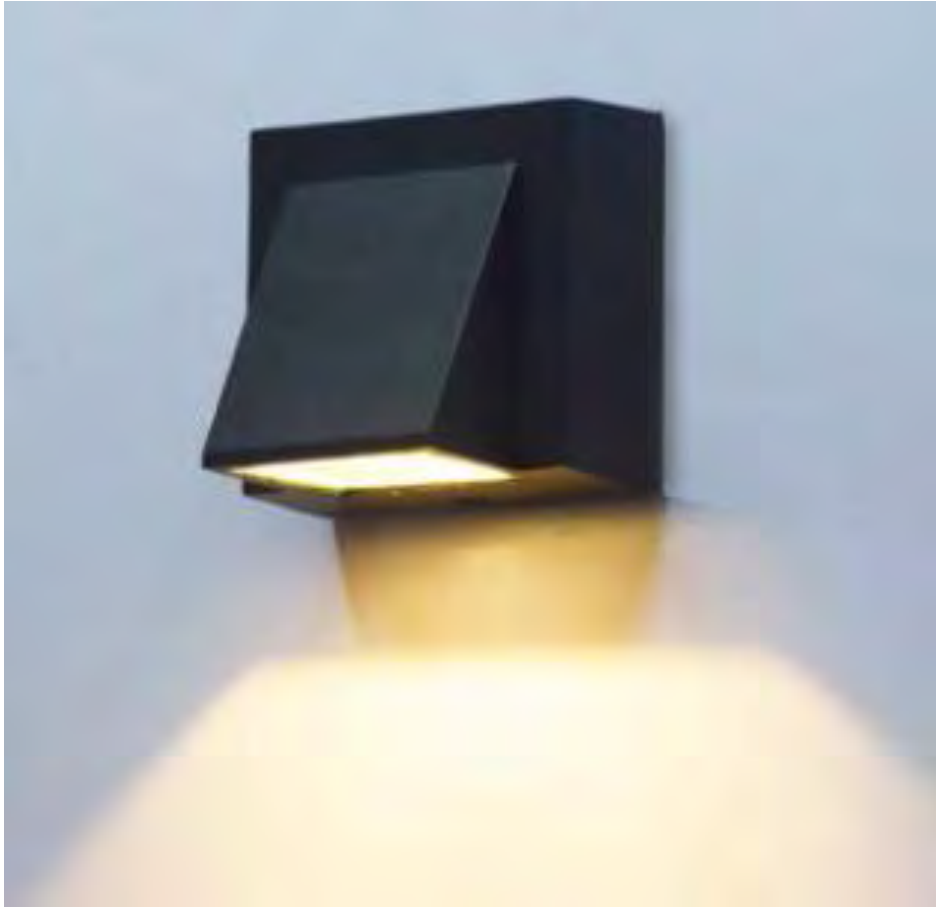

CGE-WL-014

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 5W

CCT: 3000K/6500K

Materials: Aluminum

Size: 80*80*65mm

Install style: Wall mounted, Surface mounted

Application: Garden, Building, Hotel, Park, courtyard, dooryard for led wall light



CGE-WL-015

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 2*3W/2*5W

CCT: 3000K/6500K

Materials: Aluminum

Size: 80*60*140mm

Install style: Wall mounted, Surface mounted

Application: Garden, Building, Hotel, Park, courtyard, dooryard for led wall light





CGE-WL-026

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 2*3W

CCT: 3000K/6500K/Red/Green/Blue

Materials: Aluminum

Size: 65*160mm

Install

style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, dooryard for led wall light





CGE-WL-007

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 3W

Luminous: 500LM

CCT: 3000K/4000K/6500K


Waterproof rating: IP65

Materials: Die cast aluminum

Size: $\phi 165\text{mm}$

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, doorway for led wall light

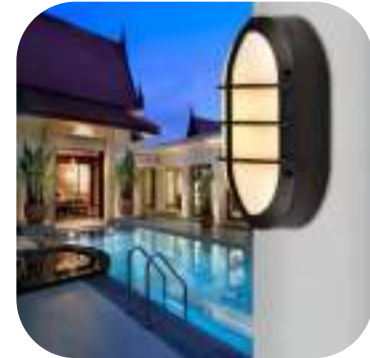



CGE-WL-006

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 15W

Luminous: 1500LM

CCT: 3000K/4000K/6500K

Sensing angle : 120°

Waterproof rating: IP65

Materials: Die cast aluminum + glass

Size: 280*180*80mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, door yard for led wall light



CGE-WL-016

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 4W

CCT: 3000K/6500K

Materials: Aluminum

Size: 245*65mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, dooryard for led wall light





CGE-WL-004

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 15W

Luminous: 1200LM

CCT: 3000K/4000K/6500K

Sensing angle : 120°

Waterproof rating: IP65

Materials: Aluminum + acrylic

Size: 170*100mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, door yard for led wall light





CGE-WL-005

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 10W

Luminous: 1000LM

CCT: 3000K/4000K/6500K

Sensing angle : 120°

Waterproof rating: IP65

Materials: Aluminum + acrylic

Size: 160*160*100mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, door yard for led wall light





CGE-WL-017

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: <40W(With E27)

CCT: 3000K/6500K

Materials: Aluminum

Size: 140mm/220mm/280mm

Install style: wall mounted, surface mounted

Application: Garden, Building, Hotel, Park, courtyard, dooryard for led wall light



CGE-WL-019

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 3W

CCT: Red, green, blue, yellow, purple, warm white, cold white, RGB

Materials: Aluminium alloy

Lighting area: 5-10 square meters

Size: 75*53mm

Application: Living room, bedroom, corridor, KTV, hotel, etc.





CGE-WL-018

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 3W/5W

Luminous: 300LM/500LM

CCT: 3000K/6500K/Colour(Customizable color)

Sensing angle : 120°

Materials: Aluminum

Size: 3W 160*80*30mm /5W 235*117*30mm

Install style: wall mounted, surface mounted

Application: Exhibition halls, bedrooms, living rooms, restaurants, art galleries, banquet halls, hotels, clubs, etc.



CGE-WL-022

➤ Parameters

Voltage: AC85-265V 50/60Hz

Power: 45W/70W/90W/135W

CCT: warm white/ cold white

Materials: Die cast aluminum

IP Rating: IP65

Size: 360*230*190mm/450*250*220mm

Application: Area lighting, villa, community, garage, warehouse, garden, park, high and low shed, etc.





CGE-WL-001

➤ Parameters

Solar panel power: 5.5V 0.55W

Battery: 18650 3.7V 1200mAH/2200mAH

LED: SMD2835*12pcs/16pcs/20pcs/25pcs/30pcs

Output power: 5W 500LM

Sensing distance: 3-5M

Sensing angle : 120°

Charging time: 6-8hrs

Materials: ABS

Working mode: light controlled +PIR

switching mode:3 modes to choose

Waterproof rating: IP65

Size: L96mm*W123mm*H48mm



CGE-WL-002

➤ Parameters

Solar panel power: Poly-silicon 2V 0.25W

Battery: 1.2V 1000mAH

LED: SMD2835*10pcs

Sensing angle : 120°

Charging time: 6-8hrs

Working mode: light controlled

Body Material:ABS

Lighting ModeL:Constant Light

Charging Method:Solar Charging

Waterproof rating: IP65

Size: L120mm*W75mm





Web site: <http://www.cgesz.com>



Contact: shelly Guo



E-mail: Guoshelly@cgesz.com



Tel: +86-0755-29781299



Whatsapp: +86 18926546715



Wechat: shelly18926546715