

SWITCH / KEYLOCK SWITCH

S215
dia.19

key lock switches, Momentary type,SINGLE POLE & DOUBLE
POLE,20 Combinations available

[PDF Download](#)[Get Information](#)

ZOOM IN

Feature


- | Contact Rating: 4A 125VAC, 2A 250VAC, 4A 28VDC (UL/CUL)
- | Contact Resistance: 10Mini-Ohms Max
- | Insulation Resistance: 500 Meg Ohms Min, (500VDC)
- | Dielectric strength: 1500VAC-1 Minute
- | Lock: Bright nickel plated zinc alloy with nickel facing
- | Tumbler mechanism: 4-disc tumbler cylinder
- | Keys: Brass with code no.
- | Contacts:Golden plated cu (Q contact material)
- | Terminals:Golden plated cu (Q contact material)
- | All keyed alike or 20 combinations standard; 20 combinations available

Specification

- Detent position
- ⊙ Detent and Pull position
- ▼ Detent and momentary position

Key Way	Pos. Angle	No.	Pole	POS.1	POS.2	POS.3
	45 degrees	A	SP	(8,1)	(1, 2)	
		B	DP	(8,1) (4, 5)	(1, 2) (5, 6)	
	45 degrees	C	SP	(8,1)	(7, 8)	
		D	DP	(8,1) (4, 5)	(7, 8) (3, 4)	
	45 degrees	E	SP	(8,1)	(1, 2)	(7, 8)
		F	DP	(8,1) (4, 5)	(1, 2) (5, 6)	(7, 8) (3, 4)
	45 / 90 degrees	G	SP	(7,1)	(1, 2)	(6, 7)
	45 / 90 degrees	I	SP	(8,1)	(7, 8)	(1, 3)
	45 degrees	J	DP	(8,1) (4, 5)	(1, 2) (5, 6)	(7, 8) (3, 4)
		K	SP	(8,1)	(7, 8)	(1, 2)
	45 degrees	L	DP	(8,1) (4, 5)	(7, 8) (3, 4)	(1, 2) (5, 6)

Ex. S215E, S215I

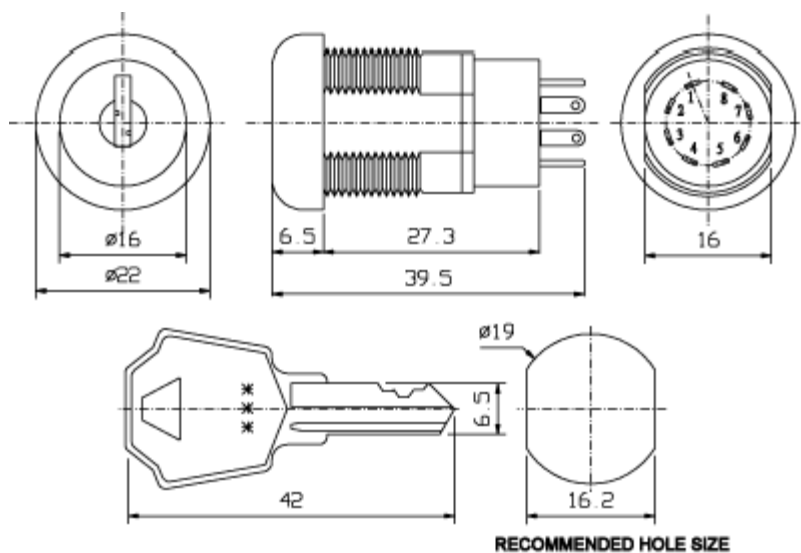

Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574
Copyright ©2009 Canal Components Inc.. All rights reserved.