




SPECIFICATIONS:

- 1、Rated Voltage: 0.66KV
- 2、Insulation Voltage: 5KV
- 3、Rated Frequency: 50HZ or 60HZ
- 4、Operating Temperature: -15℃ to 60℃
- 5、Flame resistance: UL94-V0
- 6、Certificates: CE、UL2808

Model	Input (A)	Max current (A)	Output
XH-SCT-S24	0-300A	300A	mA/0.333VAC/0-5VAC

DIMENSIONS(mm):

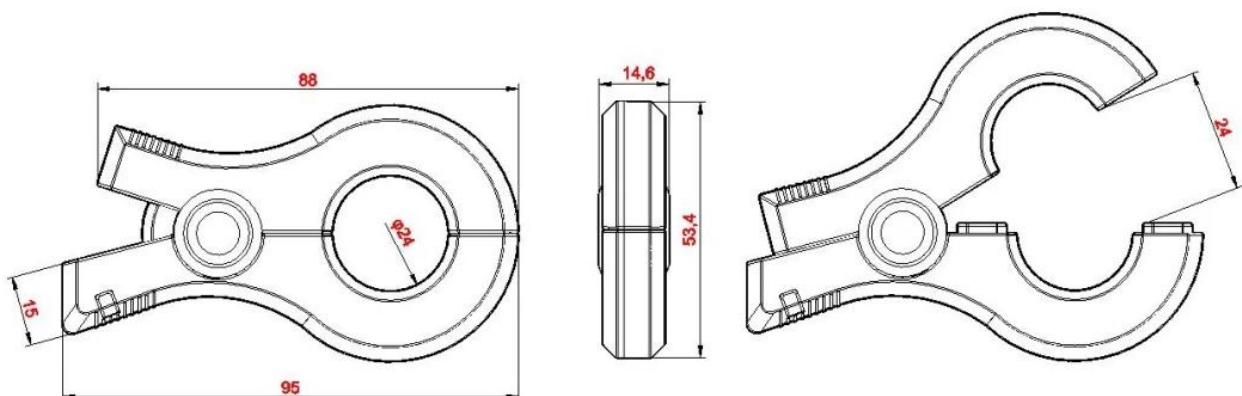

FEATURES:

- 1、Small cost

- 2、Split core design ,Easier installation
- 3、Build diode ,no high voltage danger
- 4、Good linearity at very low current

APPLICATIONS:

Sub-Metering Accurate Measurement
 Data Loggers to analyze Building & Machinery Performance
 Digital Fault Recorders
 Smart Grid Application Features
 Load Center
 Three Phase Balance Control
 In-Factory Display In-Home Display
 Inverters for Solar & Wind Turbine Systems
 Power Measurement Device For PLC

CURVE PERFORMANCE:

