


4 3 2 1



D

D






PANEL CUTOUT DIMENSION

	THICKNESS(t)
1	0.8 ⁰ _{-0.1}
2	1.3 ⁰ _{-0.1}
3	1.5 ⁰ _{-0.1}
4	1.8 ⁰ _{-0.1}

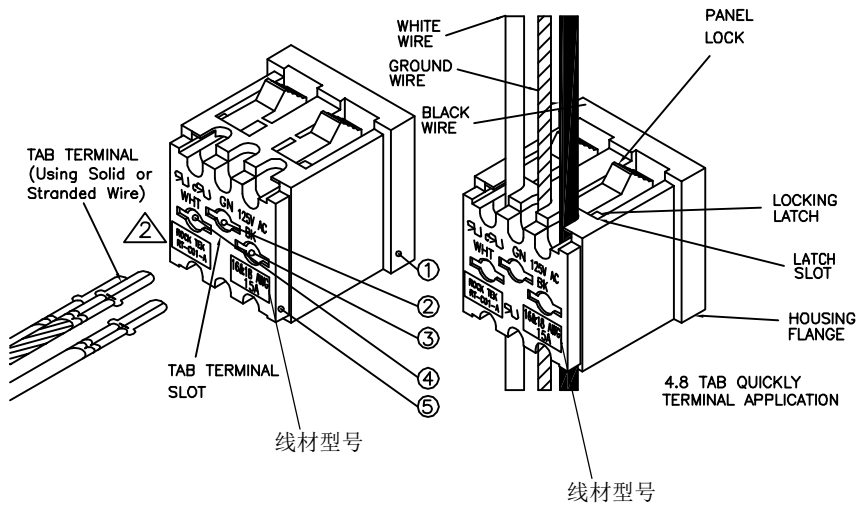

C

C

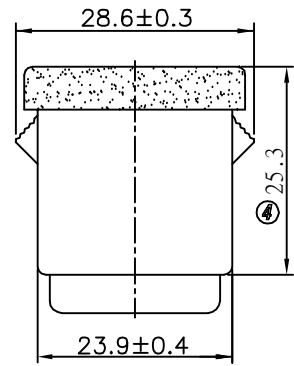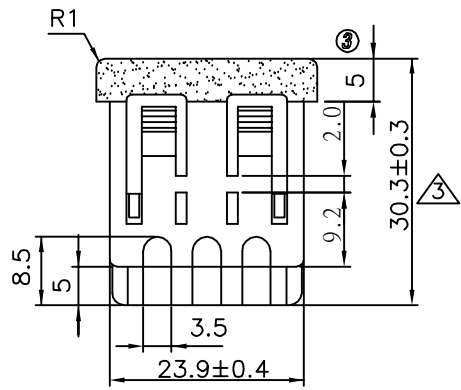

B

B

NO.	部件名称	材 料	用量
1	基 座	PA66 UL94V-0	1
2	1#端子	C2680 t0.4 无镀	1
3	2#端子	C2680 t0.4 无镀	1
4	3#端子	C2680 t0.4 镀镍	1
5	后 盖	PA66 UL94V-0	1

NOTES:
1.Rating : 15A 125VAC UL ; CUL
2.Contact resistance : 50mΩ Max
3.Insulation resistance : >100MΩ (Min) 500VDC
4.Dielectric strength : >2000VAC 0.5mA 1 minutes

品 名	线材型号	外壳颜色
RT-C01-A	16&18 AWG	黑 色
RT-C01-A1	12&14 AWG	黑 色
RT-C01-A2	16&18 AWG	白 色
RT-C01-A8	12&14 AWG	白 色
RT-C01-A3	12&14 AWG	奶白色
RT-C01-A4	16&18 AWG	奶白色
RT-C01A-K	12&14 AWG	黑 色
RT-C01-A6	12&14 AWG	冷灰9C

A

A

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE				LMC	SCALE	NO		
3	(30) → 30.3	8	→	X	±0.30				2019.05.20	MAT'L	***		
2	更正产品刻字 2020.11.28	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
1	整理图纸 2020.10.14	6	→	X.XX	±0.10	LEGION ELECTRONIC & HARDWARE CO., LTD.				RT-C01-A*		WIF106004	E2
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°								

4 3 2 1