

SWITCH / KEYLOCK SWITCH

S286  
dia.19

S286A, S286B key lock switches, 4A 125Vac, DPST,150  
Combinations

PDF Download

Get Information




ZOOM IN

Feature

- | S286A 2 Positions (off-on) 4 Terminals. (2NO.2NC)
- | S286B 2 Positions (on-on) 4 Terminals. (1NO.1NC)
- | 150 Combinations available.
- | Contact rating : 4A 125VAC, 2A 250VAC.
- | Contact resistance : 10 m ohm max.
- | Insulation resistance : 500 M ohm min. (500VDC)
- | Dielectric strength : 1,500 VAC-1 minute.
- | Housing: zinc alloy die cast, chrome plated.
- | 5-Disk tumblers mechanism.
- | Reversible double cut key brass made nickel plated.
- | Silver plated contacts and terminals.
- | All keyed alike or 25 combinations standard, 150 combinations available.


KEY-PULL FIGURES:

- -Off position
- | -Indicates Key-Pull
- -Indicates No Key-Pull

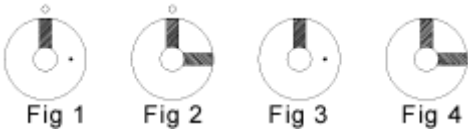

Specification

| Fig. No. | Lock Number | Pole | Positions | Terminals | Key Pulls | Turn | ↑   | →  | Type |
|----------|-------------|------|-----------|-----------|-----------|------|-----|----|------|
| 1        | S286A-1     | 2    | 2         | 4         | 1         | 90°  | Off | On | DPST |
| 2        | S286A-2     | 2    | 2         | 4         | 2         | 90°  | Off | On | DPST |
| 3        | S286B-1     | 1    | 2         | 4         | 1         | 90°  | On  | On | SPDT |
| 4        | S286B-2     | 1    | 2         | 4         | 2         | 90°  | On  | On | SPDT |

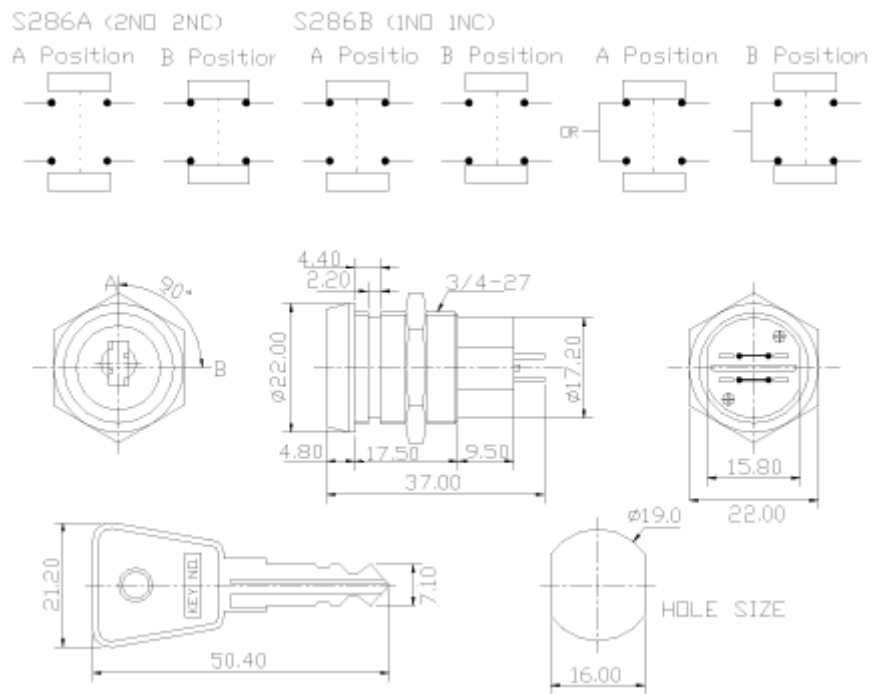

 Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574  
Copyright ©2009 Canal Components Inc.. All rights reserved.