


UL 2405 Twisted Shielded Cable 双芯屏蔽电缆

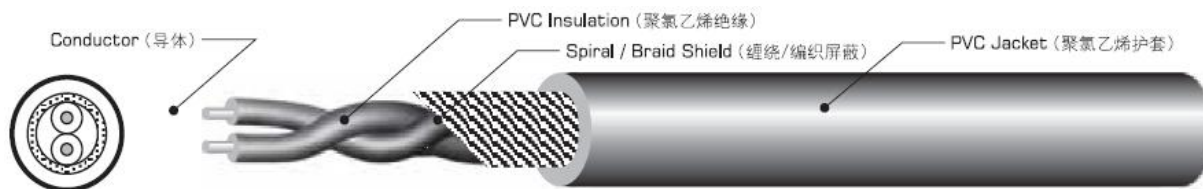

Product Description:

- ★ Rated temperature: 80°C
Rated voltage: 300V
- ★ Reference Standard: UL Subject 758, UL1581 & CSA C22.2 NO.210.2
- ★ Tinned or bare, stranded or solid copper conductor
- ★ Colour-coded lead free PVC insulation
- ★ Tinned or bare copper wire spiral or braid shield
- ★ Lead free PVC jacket
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Application: For internal wiring of computer, audio & video equipment

Cores	Conductor			Insulation		Spiral Shield No./mm	Jacket		Maximum Resistance at 20 °C Ω/km
	AWG	No./mm	Dia. mm	Nom. Thick. mm	Nom. Dia. mm	Braid Shield No./No./mm	Nom. Thick. mm	Nom. Dia. mm	
2	30	7/0.1	0.30	0.41	1.12	56/0.12	0.45	3.38	354
	28	7/0.127	0.38	0.41	1.20	60/0.12	0.45	3.54	223
	26	7/0.16	0.48	0.43	1.34	57/0.12	0.45	3.82	139
	24	11/0.16	0.61	0.41	1.43	71/0.12	0.45	4.00	88.9
	22	17/0.16	0.76	0.43	1.62	70/0.12	0.45	4.38	57.5
	22	7/0.254	0.76	0.41	1.58	78/0.12	0.45	4.30	57.5
	20	26/0.16	0.94	0.41	1.76	88/0.12	0.45	4.65	34.6
	18	41/0.16	1.18	0.43	2.04	16/7/0.1	0.54	5.22	23.3
	18	16/0.254	1.18	0.41	2.00	99/0.12	0.45	5.14	23.3
	16	26/0.254	1.50	0.41	2.32	115/0.12	0.45	5.78	15.1
3	30	7/0.1	0.30	0.41	1.12	63/0.12	0.45	3.55	354
	28	7/0.127	0.38	0.41	1.20	68/0.12	0.45	3.72	223
	26	7/0.16	0.48	0.41	1.30	73/0.12	0.45	3.94	139
	24	11/0.16	0.61	0.43	1.47	79/0.12	0.52	0.450	88.9
	22	17/0.16	0.76	0.41	1.58	89/0.12	0.45	4.54	57.5
	20	26/0.16	0.94	0.41	1.76	99/0.12	0.45	4.93	34.6
	18	41/0.16	1.18	0.41	2.00	113/0.12	0.45	5.45	23.3
4	30	7/0.1	0.30	0.41	1.12	71/0.12	0.45	3.84	354
	28	7/0.127	0.38	0.41	1.20	76/0.12	0.45	4.04	223
	26	7/0.16	0.48	0.41	1.30	82/0.12	0.45	4.28	139
	24	11/0.16	0.61	0.41	1.43	90/0.12	0.45	4.59	88.9
	22	17/0.16	0.76	0.41	1.58	100/0.12	0.45	4.95	57.5
	20	26/0.16	0.94	0.41	1.76	111/0.12	0.45	5.39	34.6

5	30	7/0.1	0.30	0.41	1.12	79/0.12	0.45	4.16	354
	28	7/0.127	0.38	0.41	1.20	85/0.12	0.45	4.38	223
	26	7/0.16	0.48	0.41	1.30	92/0.12	0.45	4.65	139
	24	11/0.16	0.61	0.41	1.43	100/0.12	0.45	5.00	88.9
	22	17/0.16	0.76	0.41	1.58	112/0.12	0.45	5.41	57.5
6	30	7/0.1	0.30	0.41	1.12	88/0.12	0.45	4.50	354
	28	7/0.127	0.38	0.41	1.20	94/0.12	0.45	4.74	223
	26	7/0.16	0.48	0.41	1.30	102/0.12	0.45	5.04	139
	24	7/0.2	0.60	0.41	1.42	112/0.12	0.45	5.40	88.9
	24	11/0.16	0.61	0.41	1.43	112/0.12	0.45	5.43	88.9