



SPECIFICATIONS

CONTACT RATING: Dependent upon contact material See Page 37.

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 20 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE & BUSHING: Glass filled nylon 6/6,flame retardant,
heat sralbilized (UL94v-0).

ACTUATOR: Brass,chrome plated,internal O-ring seal.
Standard for all actuators.

SWITCH SUPPORT: Brass,tin plated.

CONTACT / TERMINALS: Copper alloy,with Silver or gold plated.
(See Page 37)

IP 67
ACCORDING TO
EN 60529:1991+A1:2001
IEC 60529:2001

C US
E 187490

RoHS
compliant

Pb
lead-free

HOW TO ORDER

MODEL NO.	ACTUATOR	BUSHING	TERMINATIONS	CONTACT MATERIAL	SEAL	RoHS SOLDERING
Model NO. 2BS1 SP On-None-On 2BS2 SP On-None-Mom 2BS3 SP On-Off -On 2BS4 SP Mom-Off-Mom 2BS5 SP On-Off-Mom	Actuator T1 10.16 high T2 6.10 high T4 13.97 high TA Plastic,anti-static, 10.16 high TB Plastic,anti-static, 6.10 high	Bushing A1 4.35 high (Std)	Terminations MT (STD) Right angle, surface mount. MZ (STD)	Contact material Q Gold flash over silver R Gold C Gold over silver	E Seal E EPOXY (std)	RoHS soldering □ Rohs Compliant S Rohs & Lead Free F Halogen Free+RoHS







SWITCH FUNCTION

NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC			
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3	
									
SP	Q22B11	2BS1	ON	NONE	ON	2-3	N/A	2-1	
	Q22B12	2BS2	ON	NONE	MOM			OPEN	
	Q22B13	2BS3	ON	OFF	ON				
	Q22B14	2BS4	MOM	OFF	MOM				
	Q22B15	2BS5	ON	OFF	MOM				

MOM=MOMENTARY

POLE OPTIONS



MT

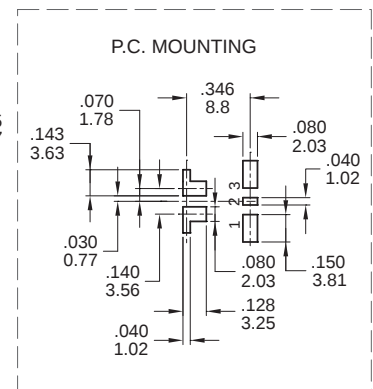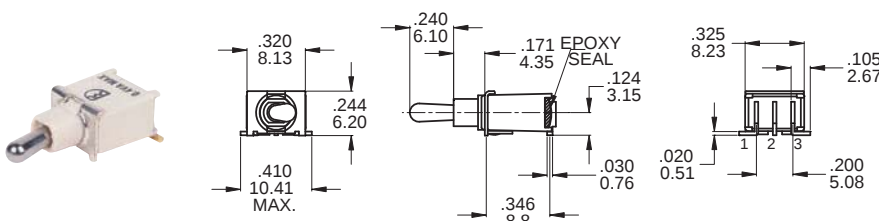

SPDT

Part No. Shown : 2BS1T2A1MTRE

MZ

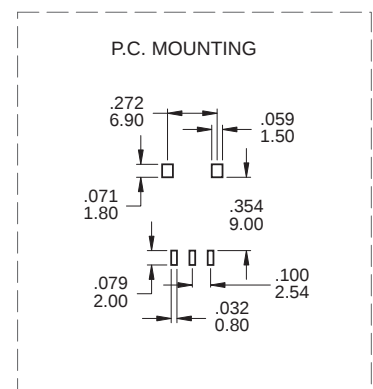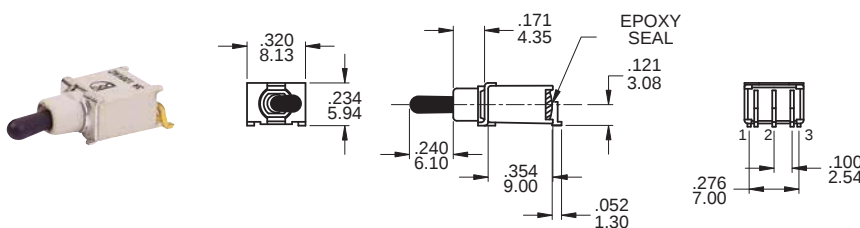


SPDT


Part No. Shown : 2BS1TBA1MZRE

ACTUATOR OPTIONS


T1




T2



TA



TB




ESD
PLASTIC ACTUATOR




PACKAGING

Switches available on embossed antistatic tape and reels.

Tape and cover strip are conductive for use near statically sensitive components.

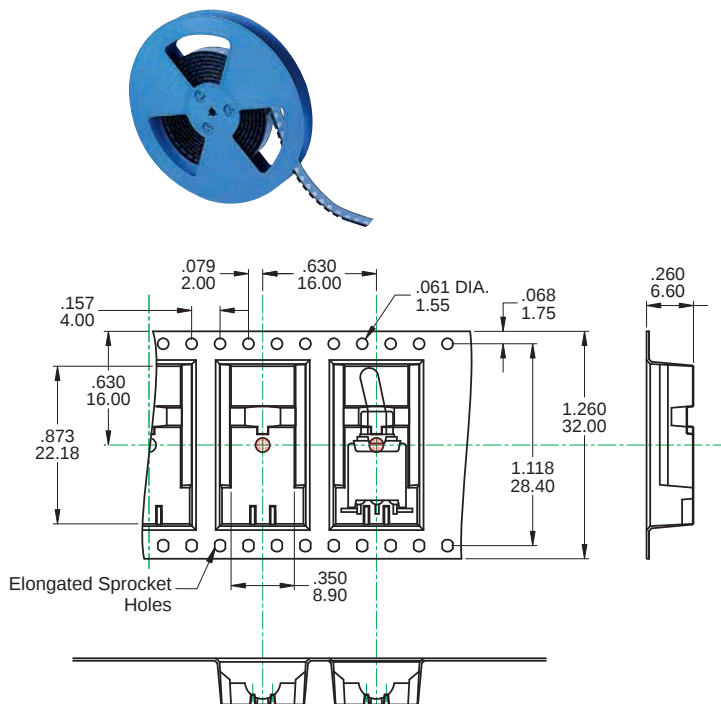

SCALE: 1 : 1

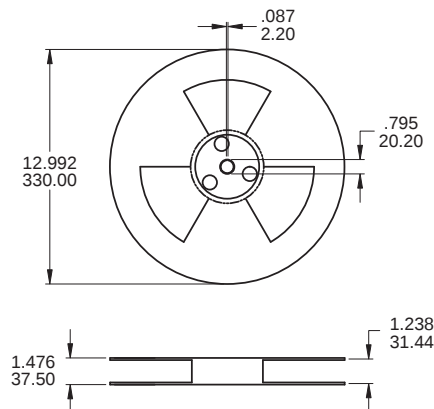

SCALE: 10 : 1

REEL INFORMATION

QUANTITY PER REEL 500 / pcs

CONTACT MATERIAL OPTIONS

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Q = Gold flash over silver	3 Amps with resistant load @ 120VAC or 28VDC 1 Amps with resistant load @ 250VAC
C	Gold over Silver	C = Gold over silver	
R	Gold	R = Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

SOLDERING PROCESSES

WAVE SOLDERING:

Recommended Soldering Temperature: $260 \pm 5^{\circ}\text{C}$

Duration of Solder Immersion: Max 5 sec.

(PCB is 1.6mm in thickness)

SOLDERING: Vapor phase & IR-reflow soldering can be applied.

Temperature Profile

Zone	Room Temperature	Time (Sec)
Pre-heat (A)	150°C	Min 120s
Soak (B)	180°C ~ 200°C	Min 150s
Peak (C)	200°C ~ 235°C	Min 30s
Peak (D)	235°C ~ 260°C	Min 40s
Peak (E)	260°C	Max 5s

