


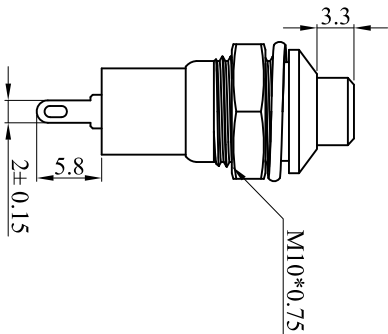
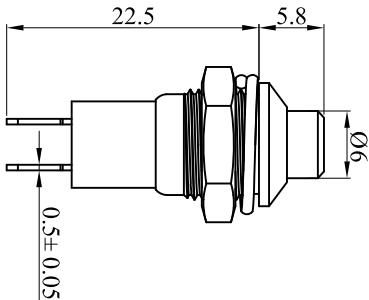




PB05R



CUT-OUT



Panel Thickness: 3mm MAX.

Rating: 1A 36VDC
1A 125VAC / 0.5A 250VDC
Contact Resistance: 50mΩ Max.
Insulation Resistance:DC 500V 100MΩ Min.
Dielectric Strength:AC 1000V 1 minute
Total travel:2.0± 0.5mm
Operating Force:400± 100gf
Electrial Life:10,000 cycles
Mechanical Life:20,000 cycles
Operating Temperature:-20° C~85° C
Function: OFF -ON

MATERIAL:

Base:Brass Ni plated;;
Cap: PA66 ;
Terminal: Brass,Gold plated;
Nut:Brass,Ni plated;

		公差 TOLERANCES		角度 ANGLE ± 5°		单位 DIMENSION UNIT	
		视图 VIEWING ANGLE	比例尺 SCALE	日期 DATE	品名 TITLE	图号 DRAWING NO	
A2	规格参数更新	2023. 05. 26	N/A	2023. 05. 26	PB05R-A-X	PB05R-A-X_CP_A2	
A1	使用温度范围变更为: -20℃~85℃	2020. 12. 17	N/A				
A0	New Issue	2020. 03. 13	N/A				
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	核对 CHECKED BY	绘图 DRAWN BY	

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
CAP COLOR (X)		