

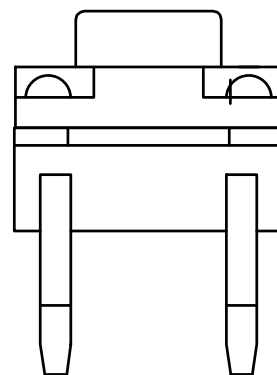
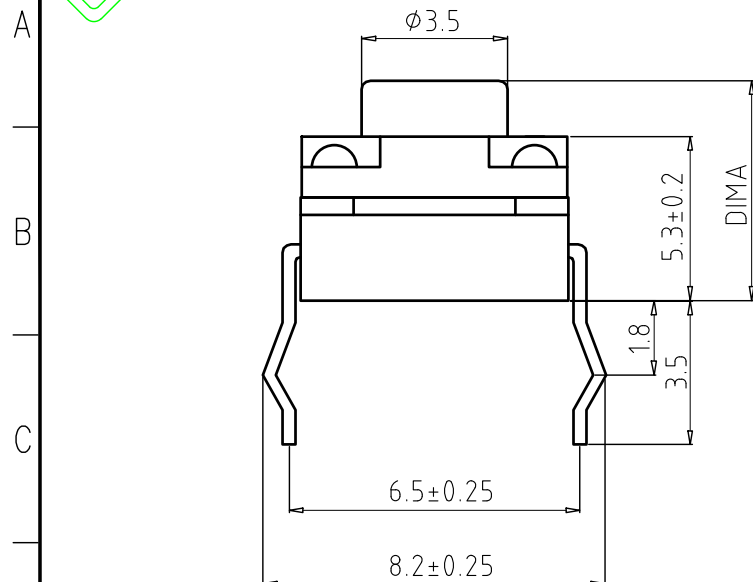



1 2 3 4 5 6 7 8

REV	DESCRIPTION	DRAWIN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE	YC.CHEN 25/11/05		

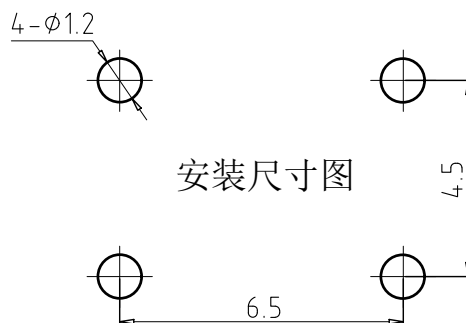

TECHNICAL PARAMETER;
1.RATING: 50mA DC12V
2.CONTACT RESISTANCE: $\leq 50m\Omega$
3.INSULATION RESISTANCE: $\geq 100M\Omega$
4.DIELECTRIC STRENGTH: 250V 50HZ 1Min
5.OPERATING FORCE: 260 $\pm$ 50gf
6.MECHANICAL LIFE: 100,000 ORDER
7.TRIP: 0.35 $\pm$ 0.1mm

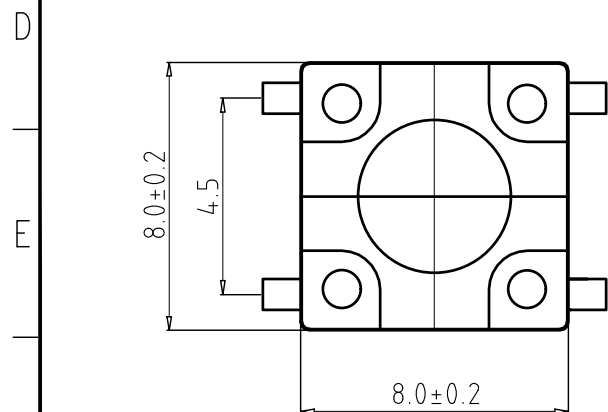

GENERAL TOLERANCE X. ± 0.35 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10		ANGLE TOLERANCE X.* $\pm 3.0^\circ$.X* $\pm 2.0^\circ$.XX* $\pm 1.0^\circ$		 东莞市福顺电子科技有限公司 DONGGUAN FOSHEN ELECTRONICS TECHNOLOGY CO.,LTD	
MAJOR (QC CHECKED) : ▼ = 2 Places CONTROL POINT FAI : to CRITICAL (Cpk & Cp) : [X] = Places		SCALE 5 : 1 UNIT mm		DESIGN YC.CHEN DATE 25/11/05 CHECK JX.ZHOU DATE 25/11/05 APPROVED David YU DATE 25/11/05	TITLE: 8x8防水轻触开关 弯脚DIP FSTS-3002 SERIES: NUDGE SWITCH SERIES DRAWIN NO: FSTS-3002-00-00
SHEET 1 OF 1				SIZE A4 REV A	

1 2 3 4 5 6 7 8