

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-06-10

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PA6T or PBT + 30%GF

Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage:450V AC/minute




Mechanical:

Operating temperatures: Gold Plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max(PA6T).

+220° C,10s max(PBT).

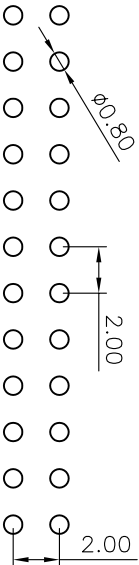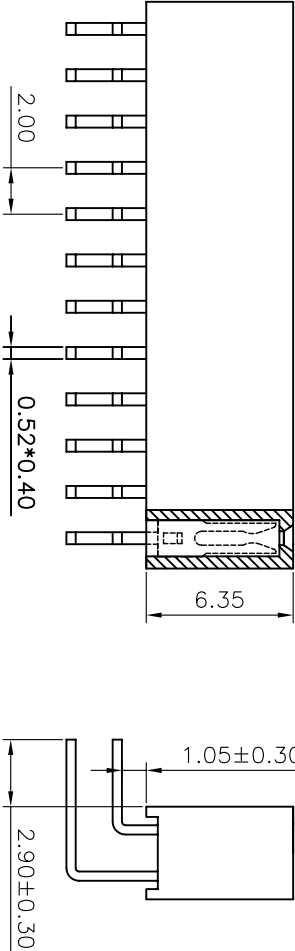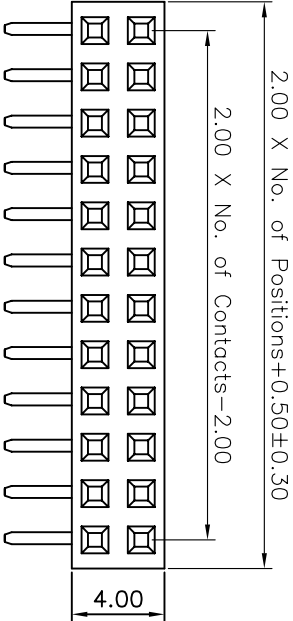

PCB LAYOUT

F124	12	XXX	XX	R	X	X	N	A	00
Product Descriptions F124 H=6.35	Product Type 12 Dual row	No. of Positions XXX Poles	Pin Plating G1 Gold "u" SN Tin Plated	Angle options R Right Angle	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural	Series NO. A OC=2.90mm		

ANYCONN® 东莞市精捷电子有限公司				DONGGUAN ANYCONN ELECTRONIC CO.,LTD			
TOLERANCE		PROJECTON		TITLE:			
ANGLE ± 5°		DATE :		PH2.00 H6.35mm Female Header,Dual Row Right Angle			
X:XXX ± 0.10		DRAWN :		PART NO: F12412XXXXXXRXNA00			
X:XX ± 0.20		CHECKED :		DRAWING NO: ANC+F12412XXXXXXRXNA00			
X:X ± 0.30		APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4			
X. ± 0.50							