

QTP8 2X36/230...240

QUICKTRONIC PROFESSIONAL 8 | ECG for FL 26 mm



Areas of application

- Suitable for use in emergency lighting systems as per EN 50172/DIN VDE 0108-100

Product benefits

- Automatic restart after lamp replacement

Product features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz, 50 Hz...60 Hz
- Lamp start with optimum filament preheating
- Life time: >100,000 h (for T = 65°C at T_c)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929
- RI suppression: to EN 55015:2006+A1:2007+A2:2009/CISPR 15
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547

Technical data

Electrical data


Nominal voltage	230...240 V
Mains frequency	50...60 Hz
DC voltage	154...276 V
Operating frequency	40...50 kHz

Light technical data

Starting time	2.0 s ¹⁾
---------------	---------------------

¹⁾ Warm start

Dimensions & weight



Product line drawing

Length	423.0 mm
Width	30.0 mm
Height	30.0 mm
Mounting hole spacing, length	415.0 mm
Product weight	399.00 g

Temperatures

Ambient temperature range	-25...+55 °C
---------------------------	--------------

Capabilities


Dimmable	No
Suitable for fixtures with prot. class	I / II

Product datasheet

Certificates & standards

Approval marks – approval	E1 approval / VDE / VDE-EMC
EEI – Energy Label	A2
Standards	acc. to EN 61347-2-3 / acc. to EN 60929 / acc. to EN 55015:2006 + A1:2007 / acc. to EN 61000-3-2 / acc. to EN 61547

Wiring Diagram

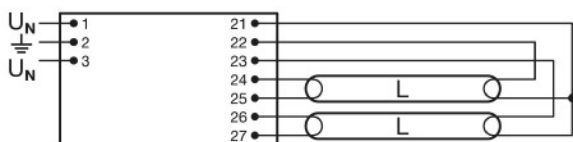

Wiring diagram




Guarantee















Guarantee

Product datasheet



Wiring diagram

Download Data

File	
	Addon Technical Information ADDON TECHNICAL INFORMATION QTP8 2x36 (GB)
	Product Datasheet QUICKTRONIC PROFESSIONAL QTP8
	Product Family Datasheet Family data sheet QTP8
	Certificates ENEC-VDE-Marks approval
	Certificates EMC-Marks approval
	Certificates INOTEC
	Certificates CEAG requirements Compatibility to modules of manufacturers for emergency lighti
	Declarations of conformity Declaration of conformity
	CAD data 3-dim 423x30x30 9900010
	CAD data 3-dim 423x30x30 9900010
	CAD data 3-dim 423x30x30 9900010
	CAD data PDF 423x30x30 9900010

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Product datasheet

Lamp-ECG combination (System)

Product name	Lamp group	Nominal current	Nominal wattage	Nominal wattage + Power loss	Luminous flux	Luminous flux at 35 °C	Ambient temperature range	Number of lighting outlets
QTP8 2x36/230-240	L 36 W XT	0.31 A	64 W	72.00 W	3200 lm	3200 lm	-25...+50 °C	2
	L 36 W XXT	0.31 A	64 W	72.00 W	3200 lm	3200 lm	-25...+50 °C	2
	L 36 W	0.31 A	64 W	72.00 W	3200 lm	3200 lm	-25...+55 °C	2
	L 38 W	0.31 A	64 W	70.00 W	3200 lm	3200 lm	-25...+55 °C	2
	L 58 W XT	0.45 A	100 W	110.00 W	5000 lm	5000 lm	-25...+50 °C	2
	L 58 W XXT	0.45 A	100 W	110.00 W	5000 lm	5000 lm	-25...+50 °C	2

Lamp group	Product name	EAN
L 36 W XT	L 36W/830 XT	-
	L 36W/840 XT	-
	L 36W/865 XT	-

Lamp group	Product name	EAN
L 36 W XXT	L 36W/830 XXT	-
	L 36W/840 XXT	-
	L 36W/865 XXT	-

Lamp group	Product name	EAN
L 36 W	L 36 W/830-1	-
	L 36W/827	-

Product datasheet

Lamp group	Product name	EAN
	L 36W/827-1	-
	L 36W/830	-
	L 36W/835	-
	L 36W/840	-
	L 36W/840-1	-
	L 36W/865	-
	L 36W/880	-

Lamp group	Product name	EAN
L 38 W	L 38W/830	-
	L 38W/840	-

Lamp group	Product name	EAN
L 58 W XT	L 58W/830 XT	-
	L 58W/840 XT	-
	L 58W/865 XT	-

Lamp group	Product name	EAN
L 58 W XXT	L 58W/830 XXT	-
	L 58W/840 XXT	-
	L 58W/865 XXT	-